
















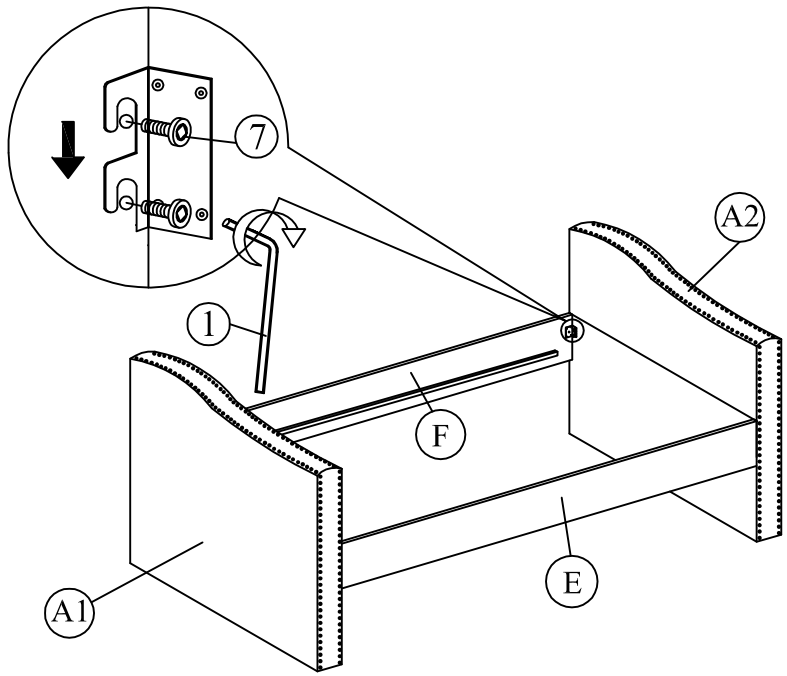



MODEL: #5325		
(BOX 1) 5325-ARM BOX OF ARM & SLAT		
A	 Arm	2 pcs
B	 Slat 13 Pcs	1 pc
C	 Slat 13 Pcs	1 pc
(BOX 2) 5325-FRAME BOX OF BACK REST & SR		
D	 Back Panel	1 pc
E	 Front Side Rail (PU)	1 pc
F	 Back Side Rail	1 pc
G	 Trundle Front Panel (PU)	1 pc
H	 Trundle Back Panel	1 pc
I	 Trundle Side Panel	2 pcs
J	 Wooden Block	4 pcs
(BOX 2) 5325-FRAME Hardware List		
1	 M5 x 70 mm	1 pc
2	 M5 x 65 mm	1 pc
3	 CSK M4 x 32mm	64 pcs
4	 JCB M6 X 50 With Spring Washers with Flat Washers	4 pcs
5	 Roller	6 pcs
6	 CSK M4 x 16 mm	24 pcs
7	 JCB M8 X 20	8 pcs

ASSEMBLY INSTRUCTION

Step 1 : Attach side rail (E) & (F) to arm (A) by pushing the bracket down to fit it.




Step 2 : Attach the Back Panel (D) to the arm (A) as shown.

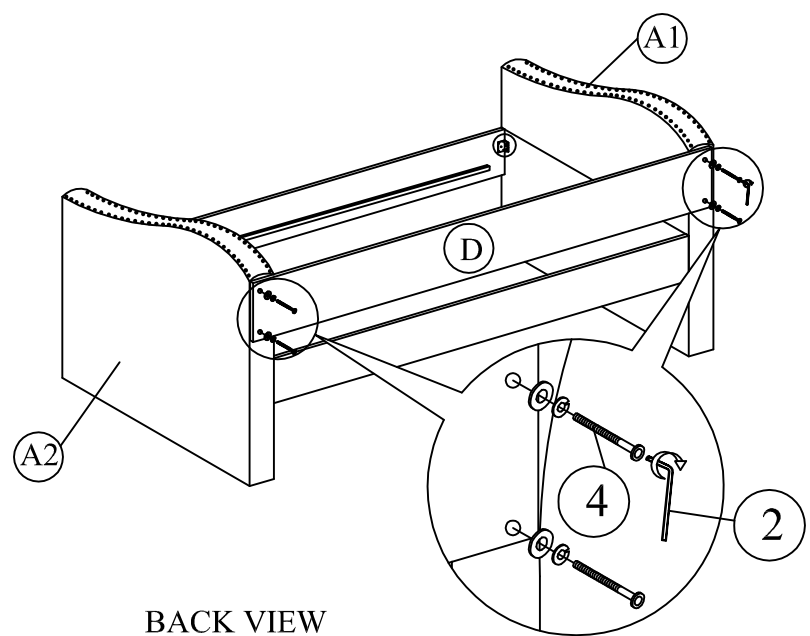


BACK VIEW


Step 3 : Tighten the 4 Corner with Allen Key (1). Install the slats to side rail. Tighten the slats with CSK screw (3). The distance of the slats should be sufficient to obtain desirable bed stability.

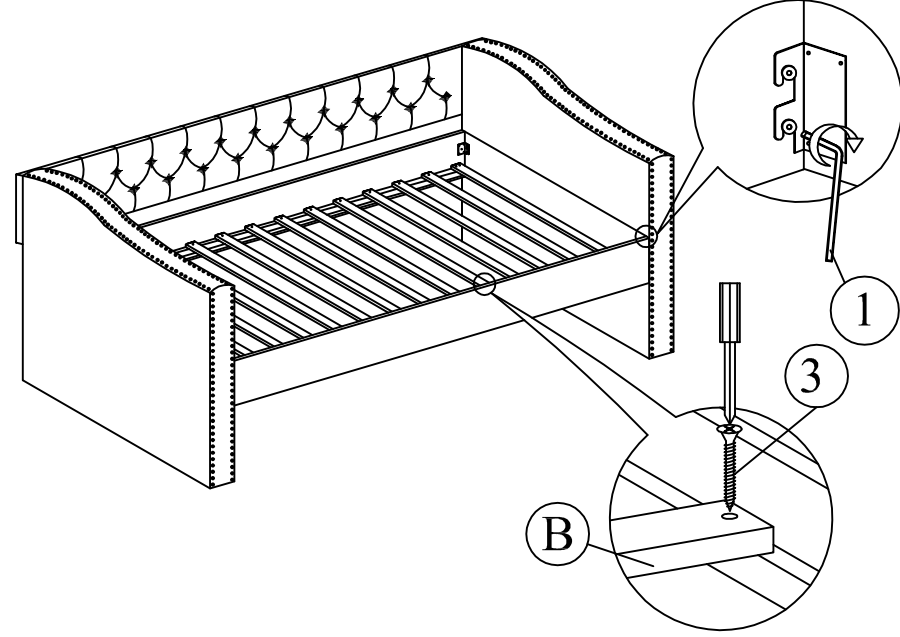


Step 4: Attach trundle side panel (I) and trundle front panel (G) to trundle back panel (H) by pushing the bracket down to fit it.

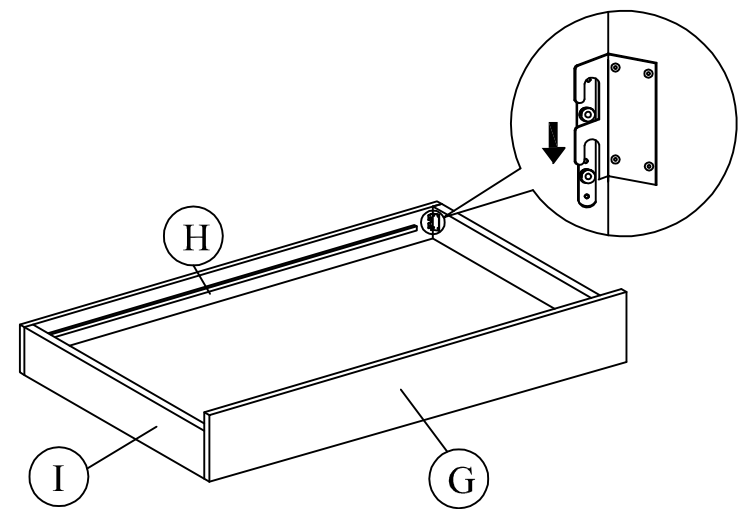

Step 5 : Affix the roller (5) to the slat (C) follow the marking on the slat (C).

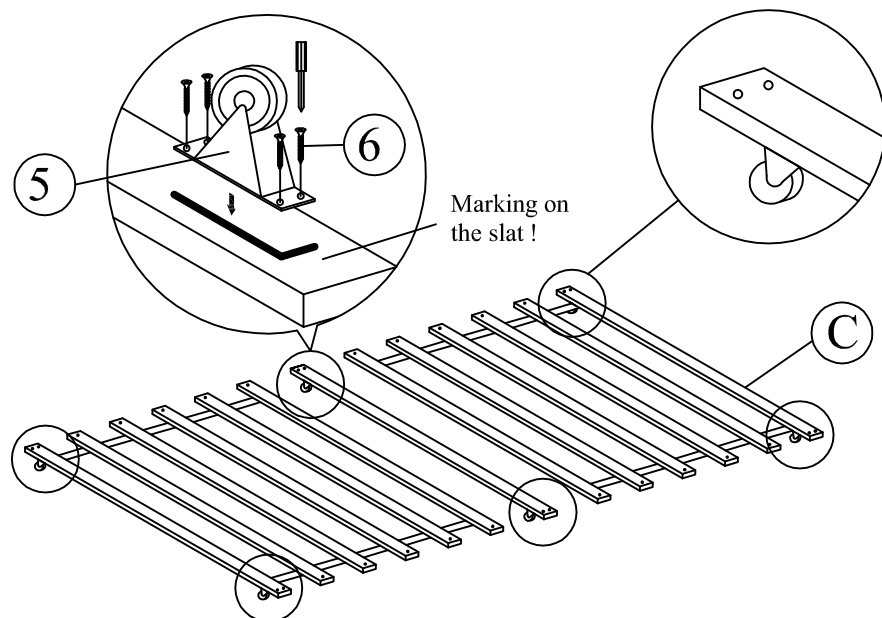

Step 6 : Place the wooden blocks (J) at the corner of the trundle and fix the slat (C) to the side rail at (E) & (F) .

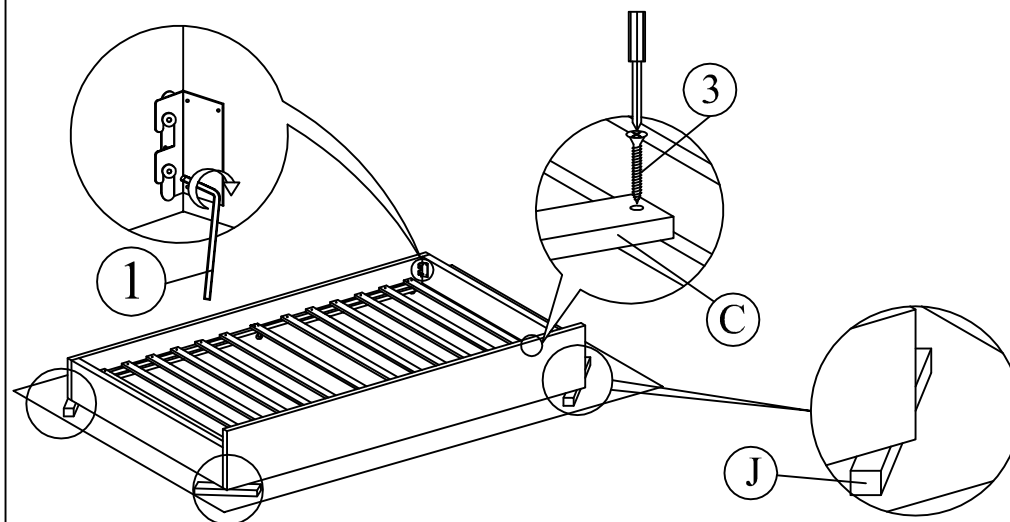

Step 7 : Assembly is complete.

