

**Item # : HE500CC****Description: HALLE COUNTER CHAIR****Product Size : 20"x 23.5"x 42"H**

Your furniture purchase is an investment. Furniture can last life times, with a minimum amount of effort. Here are a few tips to properly care for your furniture, ensuring that it looks great year after year.

**Wood Furniture Maintenance:**

- Always dust, wipe, and clean with the grain of the wood.
- Dust with a soft cloth. Dust will scratch the furniture surface if not removed properly.
- Use the same type of polish consistently as interchanging oil-based and wax-based polishes will cause a build-up and result in a foggy or cloudy appearance.
- If a polished surface become foggy, rub it with a cloth dipped in a solution of one tablespoon vinegar to one quart of water.

Rub softly with the grain until the surface is completely dry.

-Soap and water are not advisable for wood surfaces. Water can penetrate the finish and raise the grain on wood, causing damage.

-Remember to change dusting cloths frequently as dirty cloths may scratch your furniture's surface.

**The Enemies of Wood:**

- Moisture is wood's worst enemy. Liquid spills should be gently wiped up immediately. Coasters should be used under all beverages.
- Do not allow rubber or vinyl materials to lie on the furniture. Chemicals in rubber may leave a stain. Put a strip of felt or leather under accessories that have rubber or vinyl.
- Heat creates a chemical change in the furniture's finish, which results in a white spot. Use protective pads under hot dishes, appliances, etc.
- Sunlight's ultraviolet rays can damage the finish of furniture. Do not place furniture directly against heater or radiator and do not place in the path of hot streams of air from central heating. This will cause extreme localized drying of the wood.

**High Gloss Resin Table Maintenance:**

- Resin tabletops have approximately 1/8" of a resin coat on the top face of the table, which will resist ice, water, wine, liquor, food, cleaning fluids, and warm or hot liquids; however, cups, glasses, etc, containing hot liquids should not be left on the table without a coaster for protection.
- Resin tabletops will scratch just the same as any other glossy surface and basic precautions should be taken.
- For lasting shine, the resin should be waxed with a car wax that does not contain silicon. Maintaining this wax build-up will result in a high gloss shine.
- When wiping down the table, a soft, clean rag should be used. Do not use a heavy paper.

**Granite Top Maintenance:**

The surface of granite on your table has been polished or sealed to create a generally non-porous surface. The stone has many natural characteristics including: veining, hairline cracks, and color variations which make up the stone's beauty.

To maintain the beauty of your granite:

- Protect surfaces from scratching, staining and etching by
  - \*Keeping them free of debris or sharp objects.
  - \*Wiping up spills immediately.
  - \*Avoiding contact with chemicals (particularly acid-based materials)

-Clean with pH neutral products or those especially formulated for use on stone.

-It is not recommended to use a water-based solvent for dark granite as it removes the polish from the surface.

-After a period of use, apply a penetrating sealer to prevent contaminants from being absorbed into the stone.

-Remove stains with special absorbent poultices formulated for use on stone.

-Renew the surface on polished granite (granite with a high gloss surface) by buffing with special stone polish, powder or cream.

Do not use granite polish on granite with a matte finish, which has been honed rather than polished. (Penetrating sealer may be used on both polished and honed granite).

**Marble Top Maintenance :**

Marble may be stone, but it is porous stone and can stain easily. Treating marble surfaces the same as wood surfaces is a great rule of thumb.

-It is recommended to seal the tops on a regular basis (every 6 to 12 months)

A good quality stone sealer can be purchased from any tile/stone store or any homecare store and should be applied according to the manufacturer's recommendation.

-When sealed properly, marble tops can be used indoors and outdoors and can withstand any weather conditions except internal freezing.

Snow or freezing rain will penetrate the table and cause cracks.

**Caring for the Fabric on Upholstered Furniture:**

- Frequent vacuuming of the entire upholstered area will prevent dust from settling in to the fibers.
- Professional cleaning is always recommended for all upholstered pieces.
- Always pre-test a small area of fabric in an inconspicuous area when cleaning before proceeding.
- Do not use cleaning products containing brightening agents.

**VERY IMPORTANT !!****NEVER**

USE GLASS CLEANERS ON FINISHED SURFACE. AMMONIA WILL CHEMICALLY ATTACK THE FINISH.

DO NOT WASH DIRECTLY ON SURFACE



PREVENT MARKING

DO NOT PLACE DIRECTLY IN SUNLIGHT



PREVENT FADING

DO NOT PUT WITH PLACEMATS WITH RUBBER BASES



PREVENT DISCOLORING

**NEVER**

ALLOW HEAVY OR ANY KIND OF WEIGHT ON SURFACE. AGGRAVATION CAUSES THE WOOD TO WARP AND THE FINISH TO BE DAMAGED.

DO NOT USE COMMERCIAL POLISHES AND WAXES



PREVENT YELLOWING

DO NOT PLACE HOT POTS, ETC. ON SURFACE



PREVENT BURNING OR SCORCHING

DO NOT USE COMMERCIAL POLISHES AND WAXES




PREVENT SPLITTING

# HE500CC


## ASSEMBLY INSTRUCTIONS

**DO NOT FULLY TIGHTEN BOLTS AND SCREWS UNTIL THE ENTIRE ITEM IS COMPLETELY ASSEMBLED**

**Step 1: Place the Chair Back (A) on the floor with a piece of cloth or carpet underneath to prevent finish from scratching. Attach Seat Box w/ Seat Cushion (B) to Chair Back (A) by inserting Spring Washer (1), Flat Washer (2), Long Bolt (3) into the holes at the corner block of the Seat Box w/Seat Cushion (B), then using Spring Washer (1), Flat Washer (2), Short Bolt (4) to secure the rear bar of the seat frame. Tighten by Allen Key (6). Do not fully tighten.**

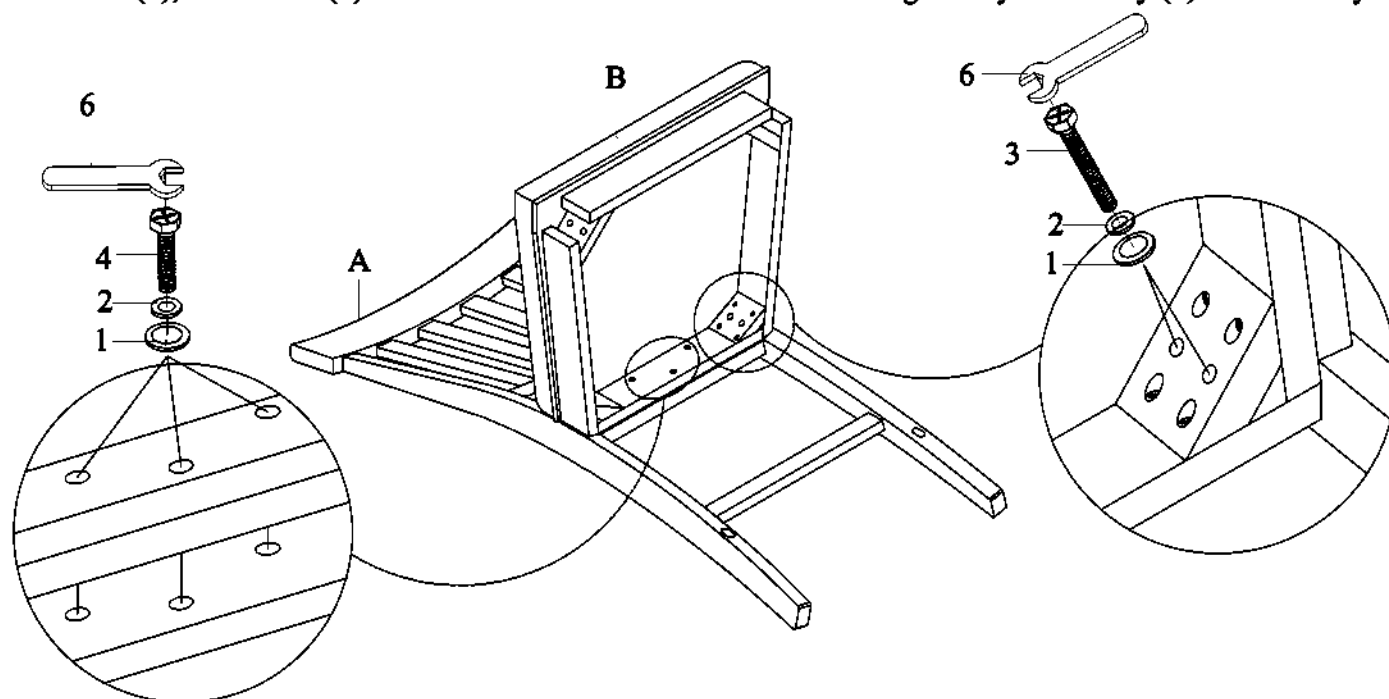


**Step 2: Attach the LSF/RSF Front Leg (C) to the Seat Box w/ Seat Panel (B) by using Spring Washer (1), Flat Washer (2), Hex Nut (5) and Wrench (6). Then insert Front Stretcher (D), LSF/RSF Stretcher (E) into holes on legs and secure with Screw (7) and Philip Screwdriver (not provided). Fully tighten all screws and hex nuts, turn the chair to upright position. Product assembly is now completed.**

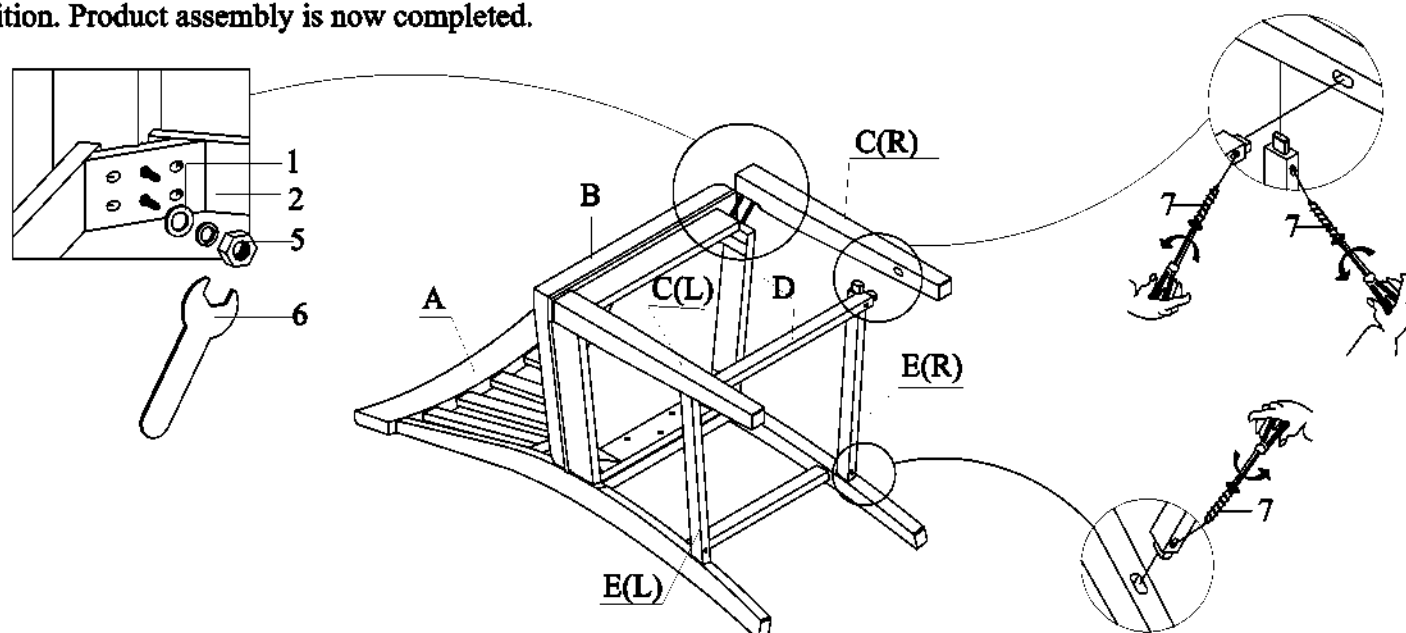


# PARTS LIST

P. 3/5


(A) CHAIR BACK  
(1PC)

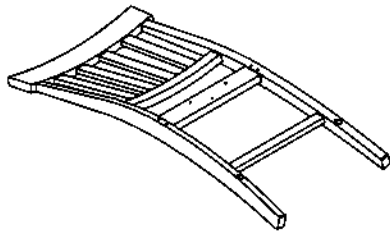

(B) SEAT BOX  
w/ SEAT CUSHION (1PC)




(C) LSF/RSF FRONT LEG  
(2PCS)



(D) FRONT STRETCHER  
(1PC)



(E) LSF/RSF STRETCHER  
(2PCS)



## HARDWARE PACK #: PHE500CCH

No

Description

Q'TY

1



Spring Washer

Ø13x2mm

11 pcs

2



Flat Washer

Ø19x2mm

11 pcs

3



Long Bolt

Ø5/16"x80mm

4 pcs

4



Short Bolt

Ø5/16"x40mm

3 pcs

5




Hex Nut

Ø5/16"x12x6

4 pcs

6




Wrench

Ø5/16"x90mm

1 pc

7




Screw

8x45mm

6 pcs

# PARTS FOR HE500CC

## COMPLETE HARDWARE #: PHE500CCH

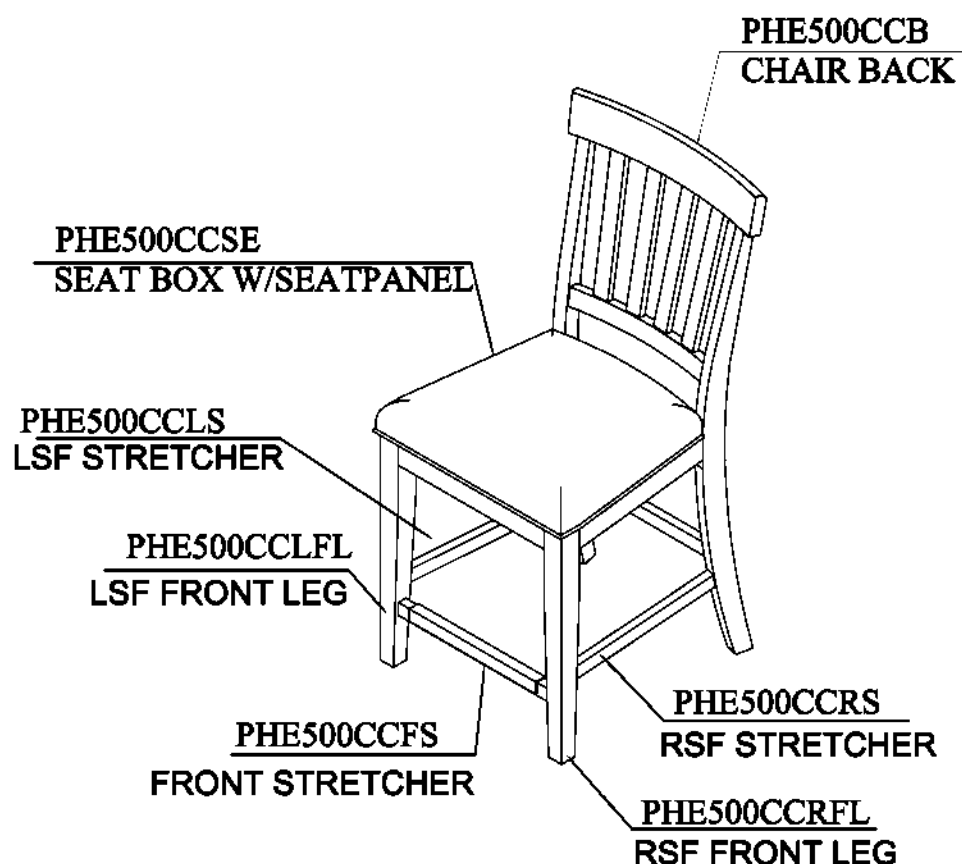

PRODUCT DETAILS	
BACK	RUBBER WOOD+PLYWOOD
SEAT BOX	RUBBER
LEG	RUBBER WOOD
PRODUCT SIZE	20" x 23.5" x 42" H
CARTON SIZE	43.75" x 21.5 x 13" H
CUFT/CTN	7.08/ 2PCS
NET WEIGHT	39.6 LBS/ 2PCS
GROSS WEIGHT	49.5 LBS/ 2PCS

MADE IN VIET NAM

# Steve Silver Company Dining Chairs

## - Assembly Troubleshooting Guide

The most important element of correct chair assembly is to tighten the bolts as directed. Prematurely tightening the bolts can lead to numerous issues and will lengthen the assembly time. Listed below are the most common issues in chair assembly and their easy solutions.

### **PROBLEM: Chair is unlevel.**

#### **Cause 1:**

Unlevel chairs can occur if the bolts are fully tightened before all bolts are attached. There is a variance in the alignment of this chair to allow the chair to be assembled more easily.

#### **Solution:**

Loosen each bolt in the seat box (front legs, back corner blocks and back apron) until they are finger tight. Place the chair upright on the floor. Sit in the chair for about 30 seconds. Carefully turn the chair upside down and tighten each bolt. The chair will now be level.

#### **Cause 2:**

Unlevel chairs can occur if one or more of the floor glides are missing from the bottom of the chair leg.

#### **Solution:**

Request a set of floor glides from the e-mail address below.

[AR@ssilver.com](mailto:AR@ssilver.com)

### **PROBLEM: Bolts do not fit properly.**

#### **Cause:**

This issue can occur when the bolts are tightened fully before all bolts are attached. There is a variance in the alignment of the bolts to allow the chair to be assembled more easily. Tightening the bolts prematurely can cause the holes for the other bolts to become slightly misaligned, causing the remaining bolts not to fit properly.

#### **Solution:**

Make sure each bolt in the seat box (front legs, back corner blocks and back apron) is loosened until finger tight. This will allow you to realign the holes, and the bolts will now fit properly.

### **Questions?**

Please call us at 1 800 344 7278, and we will be happy to help you.

**Item # : HE500CCST****Description: HALLE COUNTER BENCH****Product Size: 54"×17"×24"H**

Your furniture purchase is an investment. Furniture can last life times, with a minimum amount of effort. Here are a few tips to properly care for your furniture, ensuring that it looks great year after year.

**Wood Furniture Maintenance:**

- Always dust, wipe, and clean with the grain of the wood.
- Dust with a soft cloth. Dust will scratch the furniture surface if not removed properly.
- Use the same type of polish consistently as interchanging oil-based and wax-based polishes will cause a build-up and result in a foggy or cloudy appearance.
- If a polished surface become foggy, rub it with a cloth dipped in a solution of one tablespoon vinegar to one quart of water .
- Rub softly with the grain until the surface is completely dry.
- Soap and water are not advisable for wood surfaces. Water can penetrate the finish and raise the grain on wood, causing damage.
- Remember to change dusting cloths frequently as dirty cloths may scratch your furniture's surface .
- The Enemies of Wood:
  - Moisture is wood's worst enemy. Liquid spills should be gently wiped up immediately. Coasters should be used under all beverages.
  - Do not allow rubber or vinyl materials to lie on the furniture. Chemicals in rubber may leave a stain. Put a strip of felt or leather under accessories that have rubber or vinyl.
  - Heat creates a chemical change in the furniture's finish, which results in a white spot. Use protective pads under hot dishes, appliances, etc.
  - Sunlight's ultraviolet rays can damage the finish of furniture. Do not place furniture directly against heater or radiator and do not place in the path of hot streams of air from central heating. This will cause extreme localized drying of the wood.

**High Gloss Resin Table Maintenance:**

- Resin tabletops have approximately 1/8" of a resin coat on the top face of the table, which will resist ice, water, wine, liquor, food, cleaning fluids, and warm or hot liquids; however, cups, glasses, etc, containing hot liquids should not be left on the table without a coaster for protection.
- Resin tabletops will scratch just the same as any other glossy surface and basic precautions should be taken.
- For lasting shine, the resin should be waxed with a car wax the does not contain silicon. Maintaining this wax build-up will result in a high gloss shine.
- When wiping down the table, a soft, clean rag should be used. Do not use a heavy paper.

**Granite Top Maintenance:**

- The surface of granite on your table has been polished or sealed to create a generally non-porous surface. The stone has many natural characteristics including: veining, hairline cracks, and color variations- which make up the stone's beauty.
- To maintain the beauty of your granite:
- Protect surfaces from scratching, staining and etching by
    - \*Keeping them free of debris or sharp objects.
    - \*Wiping up spills immediately.
    - \*Avoiding contact with chemicals (particularly acid -based materials)
  - Clean with pH neutral products or those especially formulated for use on stone.
  - It is not recommended to use a water - based solvent for dark granite as it remove the polish from the surface.
  - After a period of use, apply a penetrating sealer to prevent contaminants from being absorbed into the stone.
  - Remove stains with special absorbent poultices formulated for use on stone.
  - Renew the surface on polished granite (granite with a high gloss surface) by buffing with special stone polish, powder or cream.
- Do not use granite polish on granite with a matte finish, which has been honed rather than polished. (Penetrating sealer may be used on both polished and honed granite).

**Marble Top Maintenance :**

- Marble may be stone, but it is porous stone and can stain easily. Treating marble surfaces the same as wood surfaces is a great rule of thumb.
- It is recommended to seal the tops on a regular basis (every 6 to 12 months)
- A good quality stone sealer can be purchased from any tiles/stone store or any homecare store and should be applied according to the manufacture's recommendation.
- When sealed properly, marble tops can be used indoors and outdoors and can withstand any weather conditions except internal freezing.
- Snow or freezing rain will penetrate the table and cause cracks.

**Caring for the Fabric on Upholstered Furniture:**

- Frequent vacuuming of the entire upholstered area will prevent dust from settling in to the fibers.
- Professional cleaning is always recommended for all upholstered pieces.
- Always pre -test a small area of fabric in a inconspicuous area when cleaning before proceeding.
- Do not use cleaning products containing brightening agents.

**VERY IMPORTANT !!****NEVER**

USE GLASS CLEANERS  
ON FINISHED SURFACE  
AMMONIA WILL  
CHEMICALLY ATTACK  
THE FINISH.

DO NOT  
WRITE  
DIRECTLY  
ON  
SURFACE



PREVENT  
MARKING

DO NOT  
PLACE  
DIRECTLY  
IN  
SUNLIGHT



PREVENT  
FADING

DO NOT  
WRITE  
PLACEMATS  
WITH  
RUBBER  
BASES



PREVENT  
DISCOLORING

**NEVER**

ALLOW HOURS OF ANY  
KIND TO LINGER ON  
SURFACE. ABSORPTION  
CAUSES THE WOOD TO  
WARP AND THE FINISH  
TO BE DAMAGED.

DO NOT USE  
COMMERCIAL  
POLISHES  
AND WAXES



PREVENT  
YELLOWING

DO NOT  
PLACE HOT  
POTS, ETC  
ON SURFACE



PREVENT  
DAMAGE TO  
FINISH

DO NOT USE  
COMMERCIAL  
POLISHES  
AND WAXES




PREVENT  
SPITTING


# HE500CCST

## ASSEMBLY INSTRUCTIONS


STEP 1

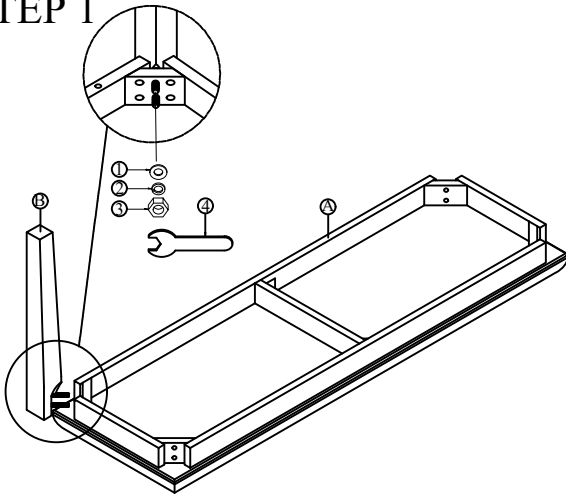


STEP 2

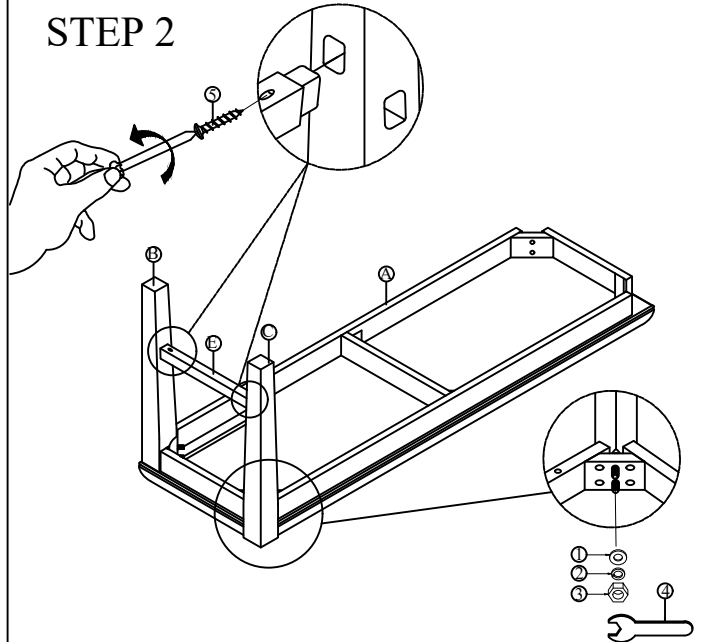

STEP 3

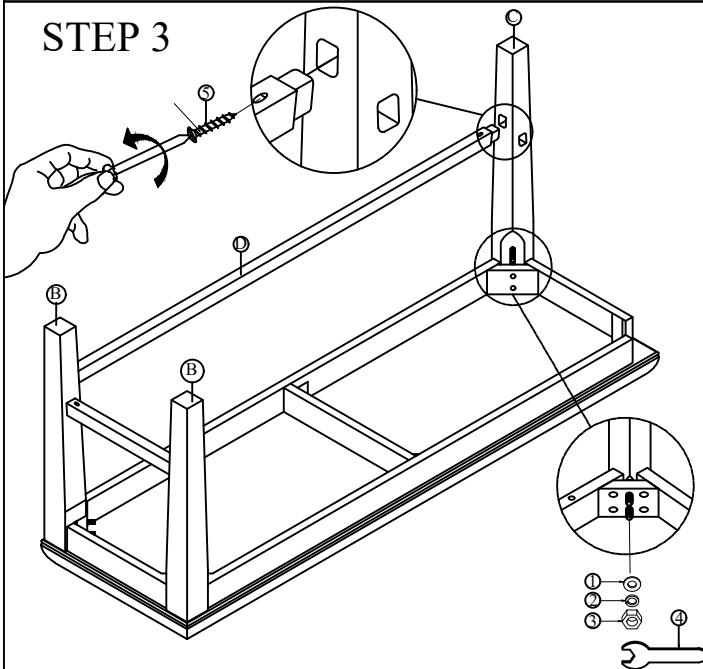

STEP 4

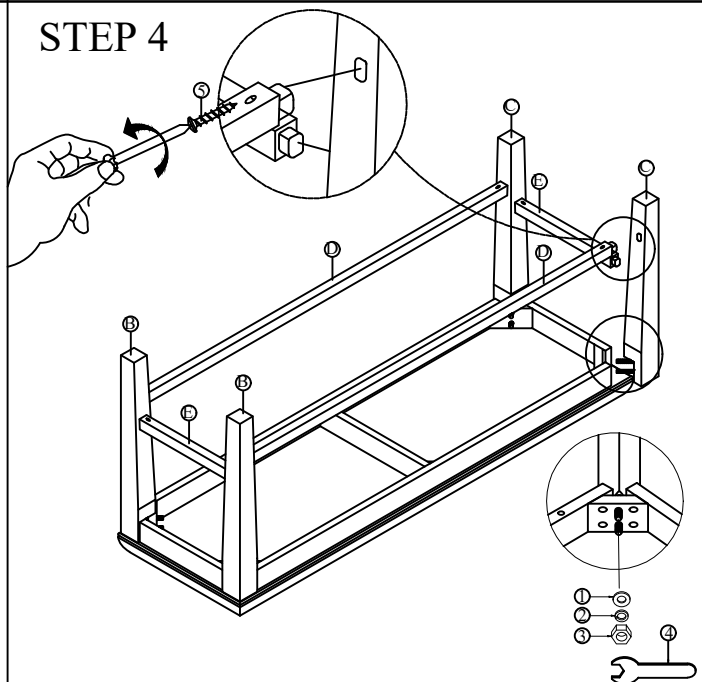






Step 1: Turn Seat cushion (A) upside down on the floor with a piece of cloth or carpet underneath to prevent cushion surface from dirt. Attach Right Leg (B) to Seat Cushion (A) by inserting Spring Washer (1), Flat Washer (2), Hex Nut (3) to the holes at the corner block of the Seat Cushion (A). Tighten with Wrench (4).

Step 2: Repeat Step 1 to attach the remaining piece of Right Leg (B) to Seat Cushion (A). Then insert Short Stretcher (E) into the holes on legs. Secure with Screw (5) and Philip Screwdriver (not provided).






Step 3: Attach Left Leg (C) to Seat Cushion (A) by using Spring Washer (1), Flat Washer (2), Hex Nut (3) and tighten by Wrench (4). Then secure Long Stretcher (D) into holes on Right Leg (C) and Left Leg (B) by Screw (5) and Philip Screwdriver (not provided).

Step 4: Step 4: Repeat Step 3 to attach Left Leg (C) remaining into Seat Cushion (A) by inserting Spring Washer (1), Flat Washer (2), Hex Nut (3) and tighten with Wrench (4). Then insert Short Stretcher (E) and Long Stretcher (D) into the holes on legs, all secure with Screw (5) and Philip Screwdriver (not provided). Fully tighten all screws and hex nuts, turn over the bench. Product assembly is now completed.

## PARTS LIST

(A) SEAT CUSHION (1PC)	(B) RIGHT LEG (2PCS)	(C) LEFT LEG (2PCS)	(D) LONG STRETCHER (2PCS)	(E) SHORT STRETCHER (2PCS)
				


## HARDWARE PACK # : PHE500CCSTH

NO.	DESCRIPTION		DIMENSION	Q' TY
1	SPRING WASHER		Ø5/16"x13x1.2mm	8PCS
2	FLAT WASHER		Ø5/16"x19x1.8mm	8PCS
3	HEX UNT		Ø 5/16"	8PCS
4	WRENCH		12MM	1PC
5	SCREW		8x45mm	8PCS



# PARTS FOR HE500CCST

## COMPLETE HARDWARE # : PHE500CCSTH

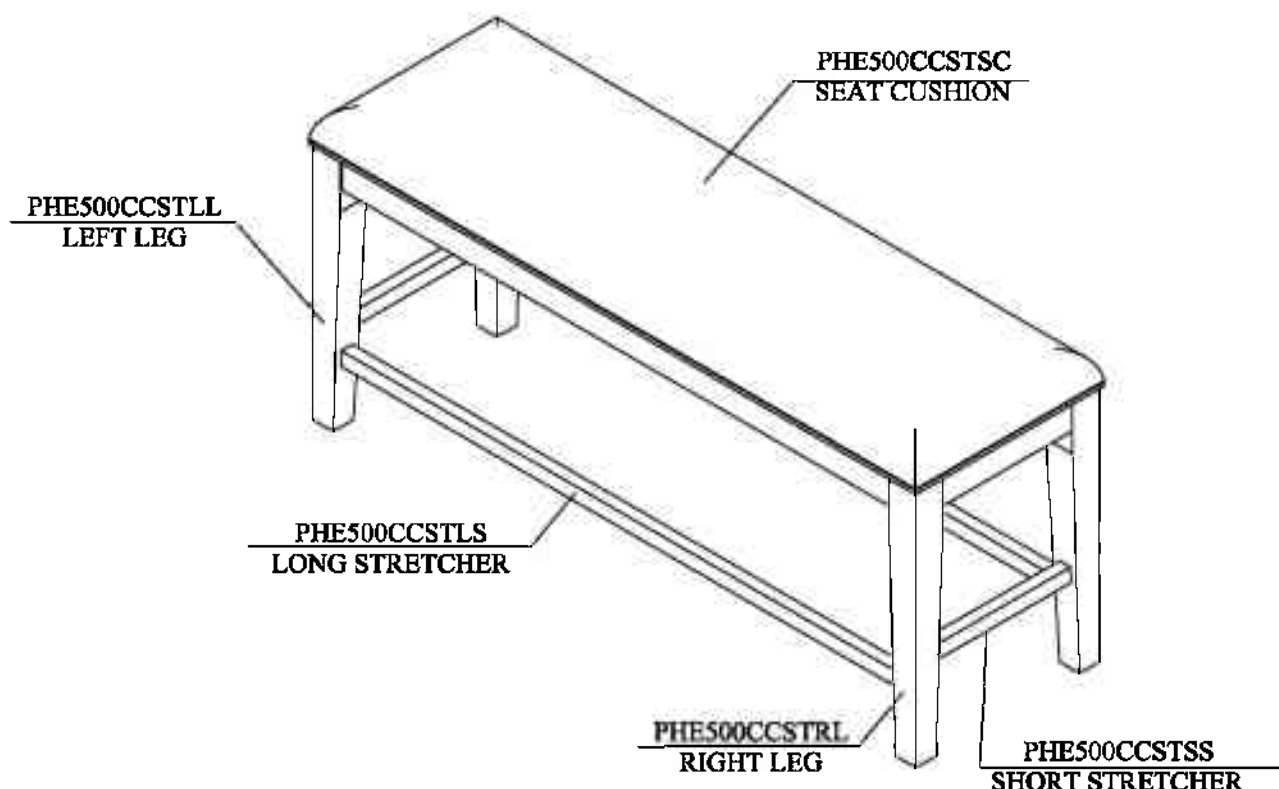

### FABRIC CONTENT : POLYESTER 100%

This fabric is not machine washable.

Allow +/-3% residual shrinkage

Do not use cleaning products containing brightening agents

Do not mix fabric of different colors.

The fabric is suitable for drapery and upholstery



## PRODUCT DETAILS

BENCH SEAT  
LEG FRAME  
PRODUCT SIZE  
CARTON SIZE  
NET WEIGHT  
GROSS WEIGHT  
CU.FT

PLYWOOD  
RUBBER  
54" x 17" x 24" H  
56.5" x 19.25" x 6.5" H  
29.7 LBS  
36.3 LBS  
4.09'

**Item # : HE500PT****Description: HALLE COUNTER TABLE****Product Size : 42"x 60"- 78"(18" Leaf) x 36.5"H**

Your furniture purchase is an investment. Furniture can last life times, with a minimum amount of effort. Here are a few tips to properly care for your furniture, ensuring that it looks great year after year.

**Wood Furniture Maintenance:**

- Always dust, wipe, and clean with the grain of the wood.
- Dust with a soft cloth. Dust will scratch the furniture surface if not removed properly.
- Use the same type of polish consistently as interchanging oil-based and wax-based polishes will cause a build-up and result in a foggy or cloudy appearance.
- If a polished surface become foggy, rub it with a cloth dipped in a solution of one tablespoon vinegar to one quart of water.

Rub softly with the grain until the surface is completely dry.

-Soap and water are not advisable for wood surfaces. Water can penetrate the finish and raise the grain on wood, causing damage.

-Remember to change dusting cloths frequently as dirty cloths may scratch your furniture's surface.

**The Enemies of Wood:**

- Moisture is wood's worst enemy. Liquid spills should be gently wiped up immediately. Coasters should be used under all beverages.
- Do not allow rubber or vinyl materials to lie on the furniture. Chemicals in rubber may leave a stain. Put a strip of felt or leather under accessories that have rubber or vinyl.
- Heat creates a chemical change in the furniture's finish, which results in a white spot. Use protective pads under hot dishes, appliances, etc.
- Sunlight's ultraviolet rays can damage the finish of furniture. Do not place furniture directly against heater or radiator and do not place in the path of hot streams of air from central heating. This will cause extreme localized drying of the wood.

**High Gloss Resin Table Maintenance:**

- Resin tabletops have approximately 1/8" of a resin coat on the top face of the table, which will resist ice, water, wine, liquor, food, cleaning fluids, and warm or hot liquids; however, cups, glasses, etc, containing hot liquids should not be left on the table without a coaster for protection.
- Resin tabletops will scratch just the same as any other glossy surface and basic precautions should be taken.
- For lasting shine, the resin should be waxed with a car wax the does not contain silicon. Maintaining this wax build-up will result in a high gloss shine.
- When wiping down the table, a soft, clean rag should be used. Do not use a heavy paper.

**Granite Top Maintenance:**

The surface of granite on your table has been polished or sealed to create a generally non-porous surface. The stone has many natural characteristics including: veining, hairline cracks, and color variations which make up the stone's beauty.

To maintain the beauty of your granite:

- Protect surfaces from scratching, staining and etching by
  - \*Keeping them free of debris or sharp objects.
  - \*Wiping up spills immediately.
  - \*Avoiding contact with chemicals (particularly acid-based materials)

-Clean with pH neutral products or those especially formulated for use on stone.

-It is not recommended to use a water-based solvent for dark granite as it remove the polish from the surface.

- After a period of use, apply a penetrating sealer to prevent contaminants from being absorbed into the stone.

-Remove stains with special absorbent poultices formulated for use on stone.

-Renew the surface on polished granite (granite with a high gloss surface) by buffing with special stone polish, powder or cream.

Do not use granite polish on granite with a matte finish, which has been honed rather than polished. (Penetrating sealer may be used on both polished and honed granite).

**Marble Top Maintenance :**

Marble may be stone, but it is porous stone and can stain easily. Treating marble surfaces the same as wood surfaces is a great rule of thumb.

-It is recommended to seal the tops on a regular basis (every 6 to 12 months)

A good quality stone sealer can be purchased from any tiles/stone store or any homecare store and should be applied according to the manufacture's recommendation.

-When sealed properly, marble tops can be used indoors and outdoors and can withstand any weather conditions except internal freezing.

Snow or freezing rain will penetrate the table and cause cracks.

**Caring for the Fabric on Upholstered Furniture:**

- Frequent vacuuming of the entire upholstered area will prevent dust from settling in to the fibers.
- Professional cleaning is always recommended for all upholstered pieces.
- Always pre-test a small area of fabric in a inconspicuous area when cleaning before proceeding.
- Do not use cleaning products containing brightening agents.

**VERY IMPORTANT !!****NEVER**

USE GLASS CLEANERS ON FINISHED SURFACE. AMMONIA WILL CHEMICALLY ATTACK THE FINISH.

DO NOT WRITE DIRECTLY ON SURFACE



PREVENT MARKING

DO NOT PLACE DIRECTLY IN SUNLIGHT



PREVENT FADING

DO NOT PUT WITH PLACEMATS WITH RUBBER BASES



PREVENT DISCOLORING

**NEVER**

ALLOW HEAVY OR ANY KIND OF LOAD ON SURFACE. AGGRAVATION CAUSES THE WOOD TO WARP AND THE FINISH TO BE DAMAGED.

DO NOT USE COMMERCIAL POLISHES AND WAXES



PREVENT YELLOWING

DO NOT PLACE HOT POTS, ETC. ON SURFACE



PREVENT BURNING OR SCORCHING

DO NOT USE COMMERCIAL POLISHES AND WAXES




PREVENT SPLITTING


# HE500PT

## ASSEMBLY INSTRUCTIONS


### STEP 1

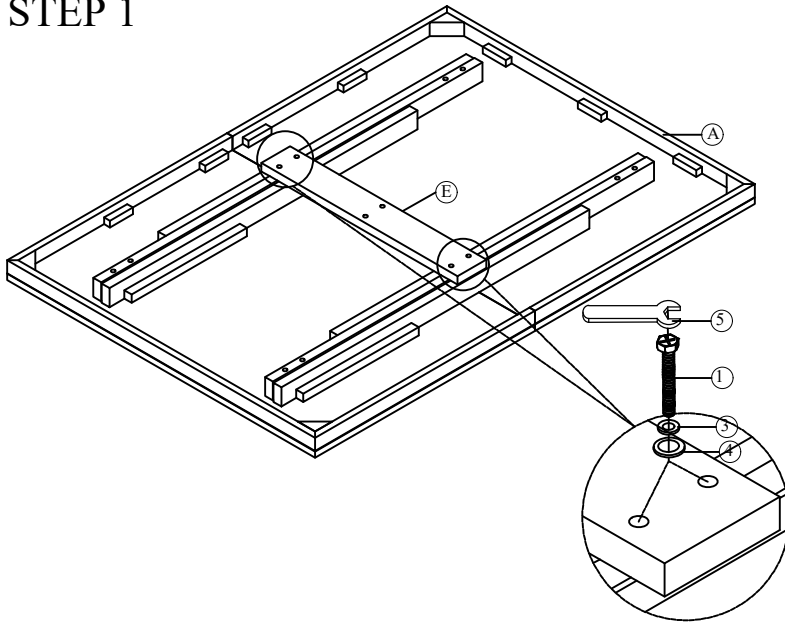

### STEP 2

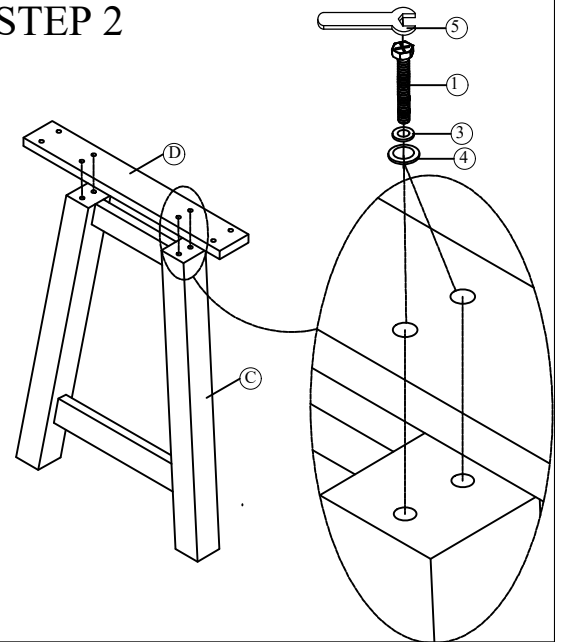

### STEP 3

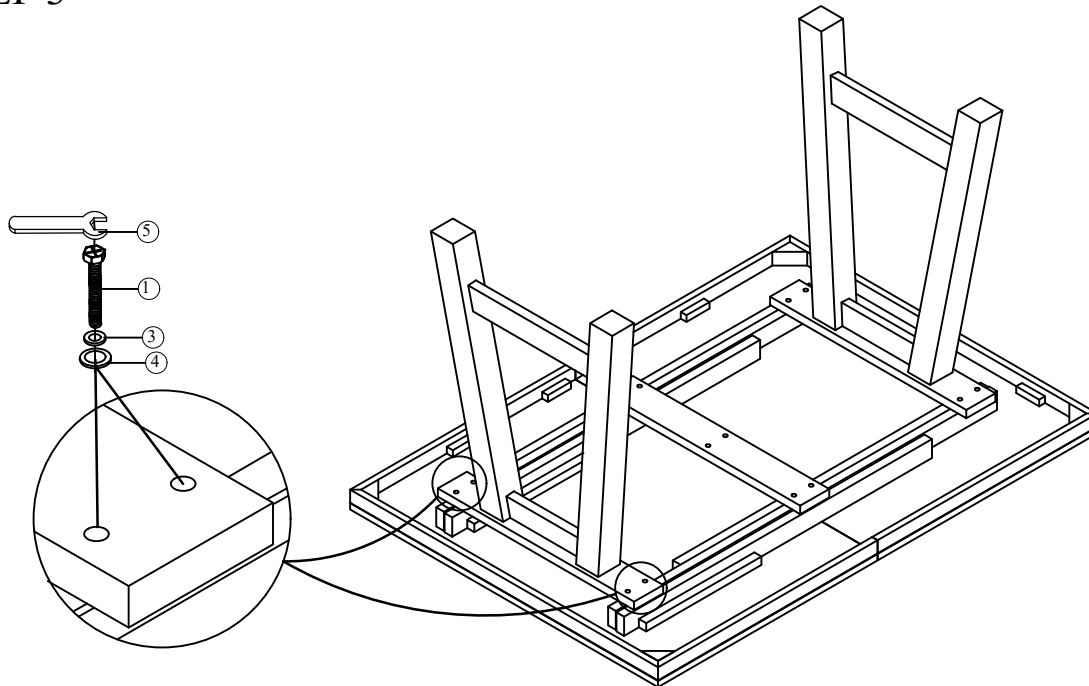

Step 1: Turn Table top (A) upside down on the floor with a piece of cloth or carpet underneath to prevent finish from scratching. Attach Mounting Plate B (E) to Table top (A) by inserting Long Bolt (1), Lock Washer (3), Flat Washer (4) into holes on Mounting Plate B (E) and wooden glide, secure with Wrench (5).


Step 2: Attach Mounting Plate A (D) to Leg Frame (C) by using Long Bolt (1), Lock Washer (3), Flat Washer (4). Tighten with Wrench (5). Repeat to attach remaining piece of Mounting Plate A (D) to Leg Frame (C).

Step 3: Attach Mounting Plate A (D), Leg Frame (C) to Table Top (A) by inserting Long Bolt (1), Lock Washer (3), Flat Washer (4) into holes on wooden glide. Tighten with Wrench (5).


# HE500PT

## ASSEMBLY INSTRUCTIONS

### STEP 4

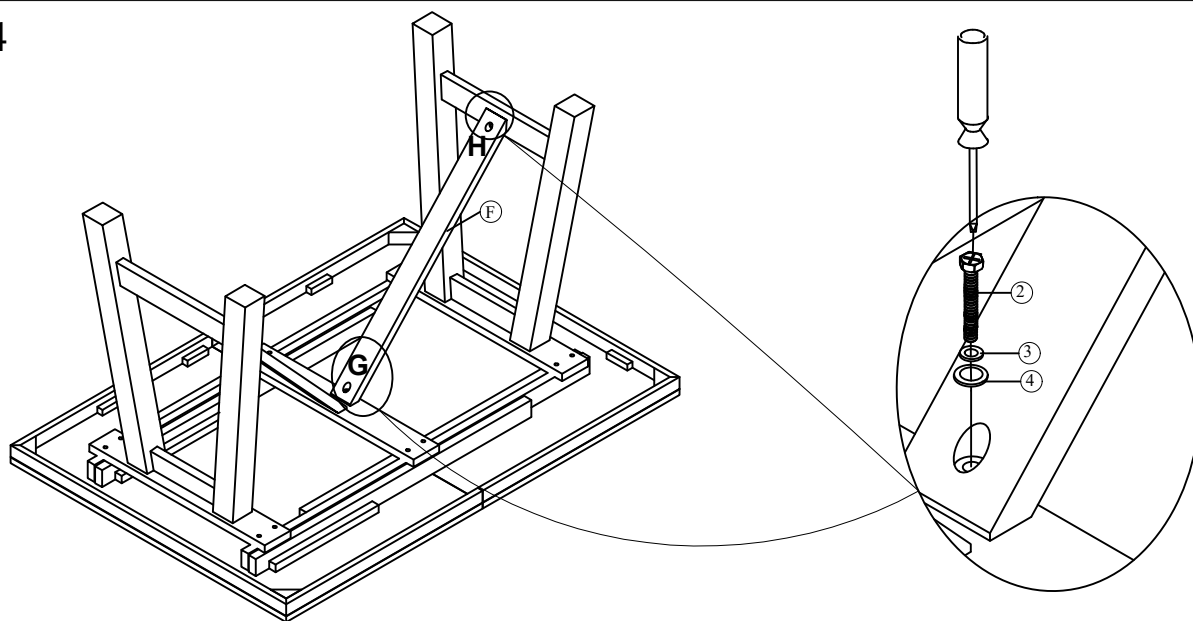







### STEP 5

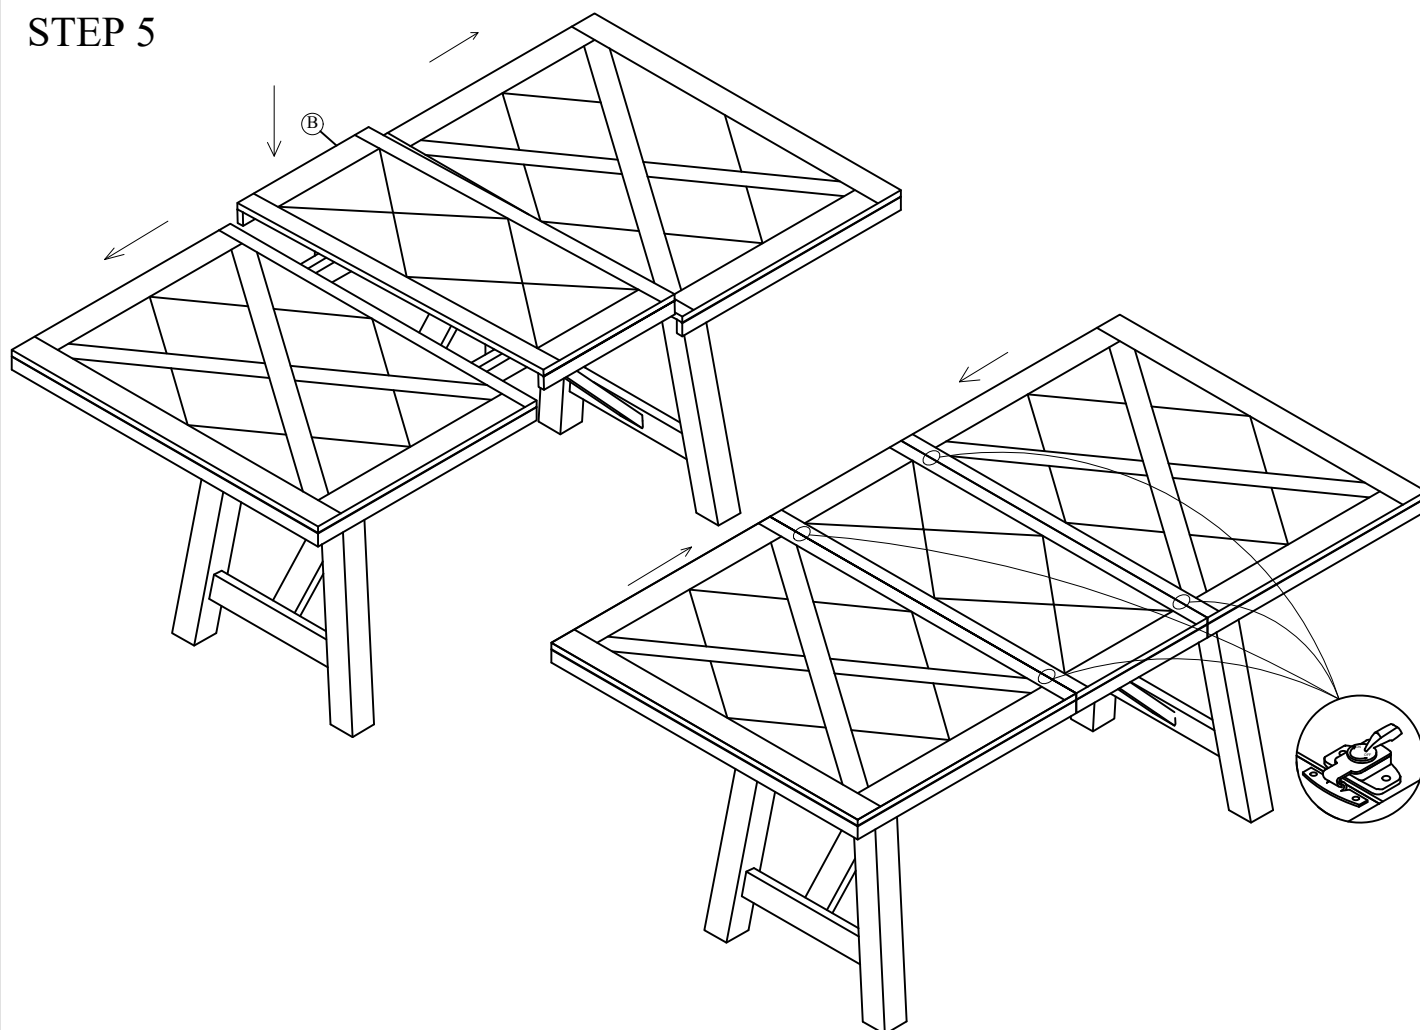






Step 4: Attach Stretcher (F) by securing position G of Stretch (F) to Mounting Plate B (E) and position H to Leg Frame (C) with Short Bolt (2), Lock Washer (3), Flat Washer (4) and Wrench (5).

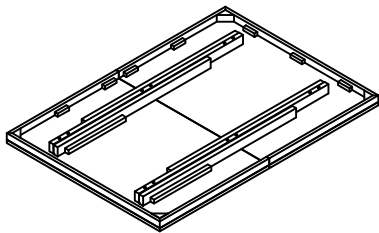Step 5: Turn the table to the upright position. Unlock the latch underneath of the Table Top(A). Pull the Table Top(A) from both ends, place Leaf (B) in position. Lock the latch underneath of the table top to prevent from sliding. Assembly product is now completed.


## PARTS LIST

(A) TABLE TOP (1PC)	(B) LEAF (1PC)	(C) LEG FRAME (2PCS)
		
(D) MOUNTING PLATE A (2PCS)	(E) MOUNTING PLATE B (1PC)	(F) STRETCHER (2PCS)
		

## HARDWARE PACK # : PHE500PTH


NO.	DESCRIPTION		DIMENSION	Q' TY
1	LONG BOLT		Ø5/16"x2"	20PCS
2	SHORT BOLT		Ø5/16 "x1-1/2"	4PCS
3	LOCK WASHER		Ø5/16"x13MMx1.2MM	24PCS
4	FLAT WASHER		Ø5/16" x19MMx1.8MM	24PCS
5	WRENCH			1PC

Note: Philip Screwdriver needed but not supplied



# PARTS FOR HE500PT

## COMPLETE HARDWARE # : PHE500PTH

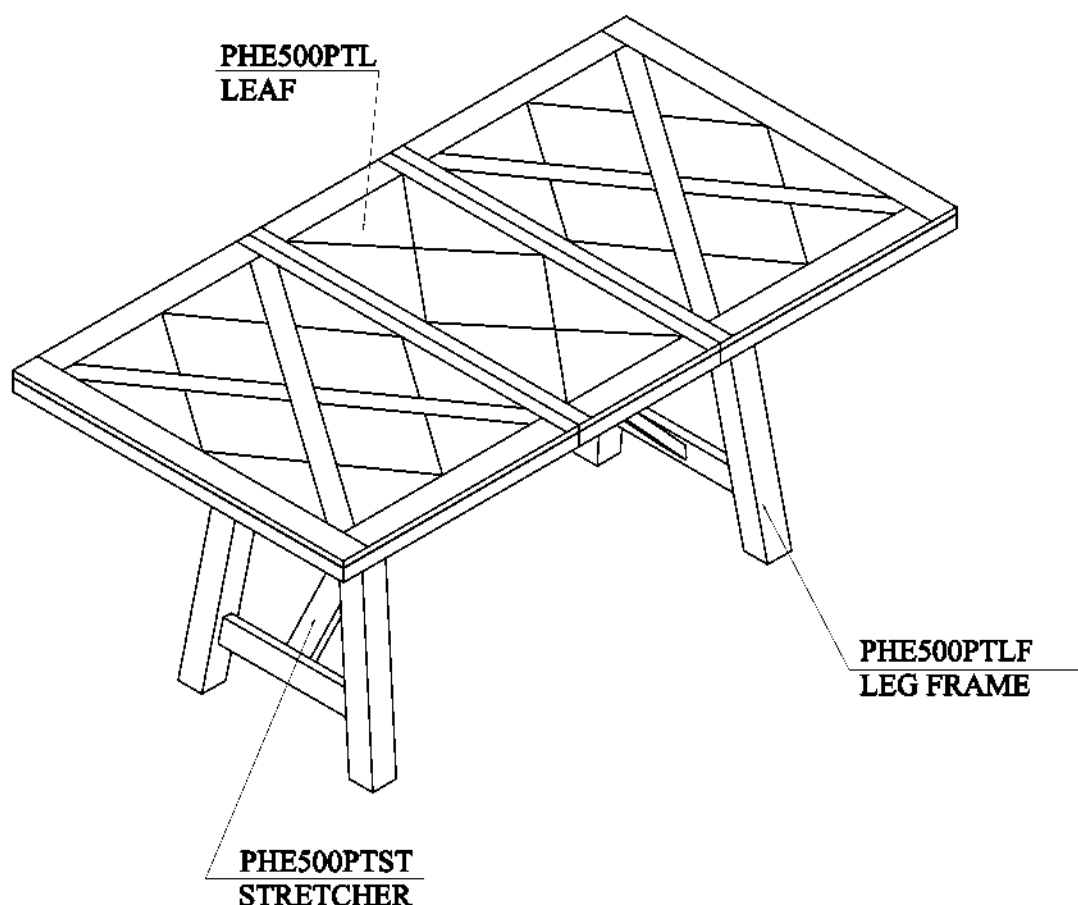

### PRODUCT DETAILS

TABLE TOP  
MOUNTING PLATE  
LEG FRAME  
STRETCHER  
PRODUCT SIZE  
CARTON SIZE  
NET WEIGHT  
GROSS WEIGHT  
CU.FT.

MDF/MANGO VENEER/ RUBBER WOOD  
PLYWOOD  
RUBBER WOOD  
RUBBER WOOD  
42"x 60"- 78" x 36.5"H ( w/18" Leaf)  
64" x 46.5" x 8.5" H  
137.5 LBS  
154 LBS  
14.64'

**MADE IN VIETNAM**