


# AJEQ09DCF

## GE® 230/208 Volt Built-In Heat/Cool Room Air Conditioning

### WALL CASE DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

**NOTE:** When installing slide-out chassis units in through-the-wall applications, keep louvers free. Do not restrict air flow areas.

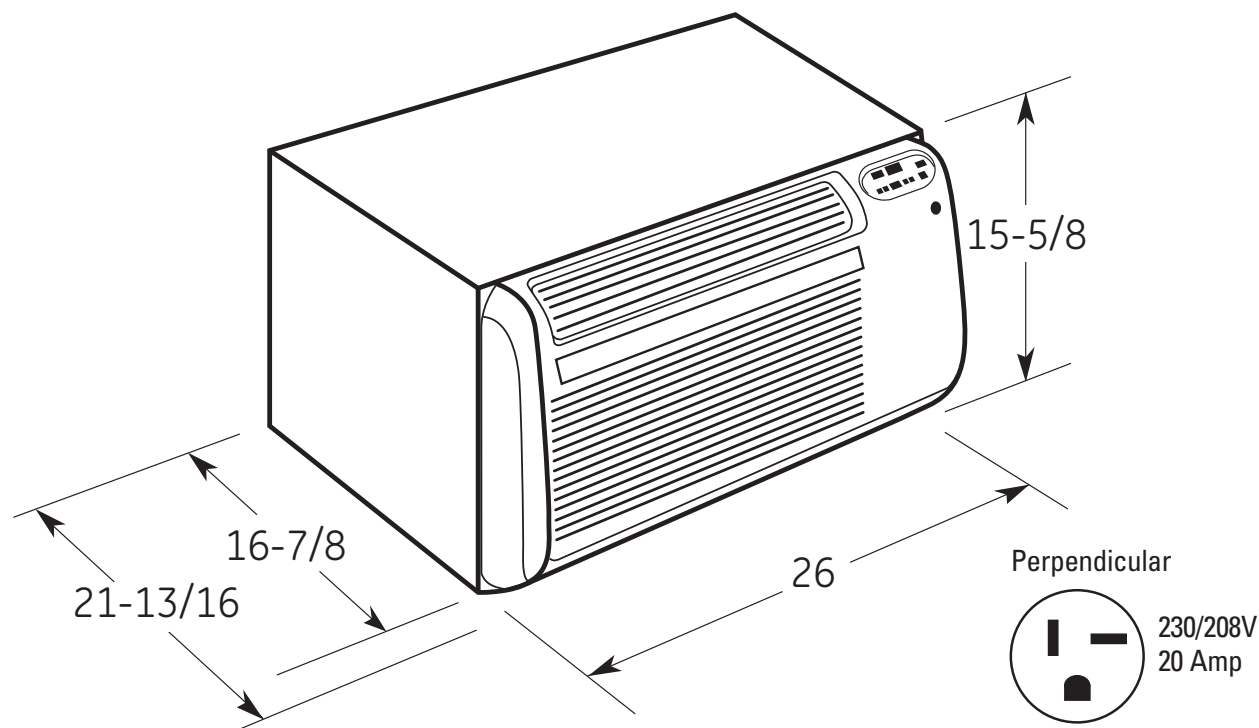

For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.



Total volume and shelf area are calculated by the Association of Home Appliance Manufacturers' standards.



Listed by Underwriters Laboratories

Specification Revised 6/18

## GE® 230/208 Volt Built-In Heat/Cool Room Air Conditioning






**INSTALLATION INFORMATION:** A finished opening of 26-1/8" x 15-3/4" clear of intrusions is required. Keep clearance of 4" from side walls. Brick veneer or frame walls should have wood studding surrounding case to provide firm anchoring with screws. Case can be fastened directly to brick or block walls with screws sunk in lead expansion shields.

## TWO WALL CASES FOR TENANT OPTION INSTALLATION:

**RAB47:** includes wall case, exterior grille and steel closure panels.

**RAB48:** includes wall case, exterior grille, steel closure panel and two layers of insulation.

Solid-sided wall case fabricated of galvanized steel with baked enamel finish. Welded areas are coated with a sealing compound to help resist rust and corrosion. Polymer gasket surrounds opening to assure tight weather seal. Aluminum grille (RAG13) is included. Panels on interior and between case and grille provide weather protection prior to installation of chassis. Provide firm anchoring with screws. Case can be fastened directly to brick or block walls with screws sunk in lead expansion shields.



# AJEQ09DCF

## GE® 230/208 Volt Built-In Heat/Cool Room Air Conditioning

### FEATURES AND BENEFITS

9,300/9,100 cooling BTU

11,200 / 9,200 resistance heat BTU

9.8/9.8 EER

9.6/9.6 CEER

230 / 208 Volts

R-410A refrigerant

Electronic controls with remote

Electronic digital thermostat control

Four-way air direction


Up-front, washable air filter

2 cooling / 2 heating / 2 fan only speeds

3470 / 2850 Watts heat

Unit dimensions – 24-13/16"W x 14-7/8"H x 19-29/32"D

Model AJEQ09DCF – Soft Gray

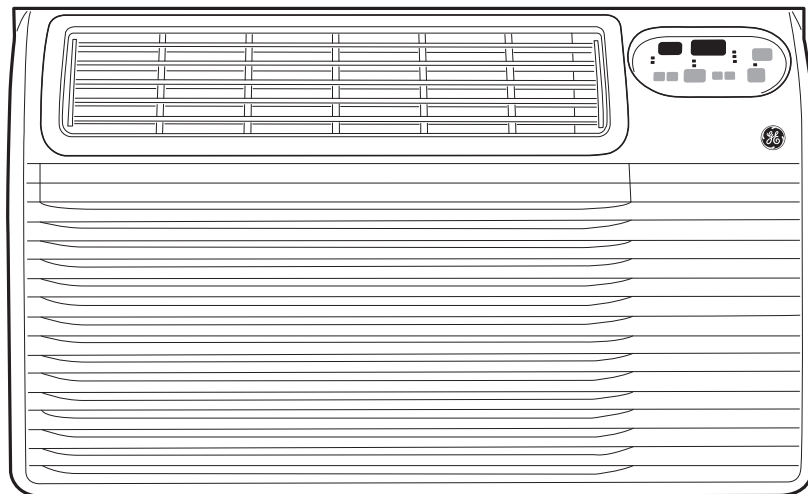

*For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.*



Total volume and shelf area are calculated by the Association of Home Appliance Manufacturers' standards.



Listed by  
Underwriters  
Laboratories

Specification Revised 6/18