

LG SIGNATURE

9.0 cu.ft. Capacity
Full Touch LCD Screen
AI Sensor Dry
25 Drying Programs
TurboSteam®

KEY FEATURES



PRODUCT FEATURES

© 2018 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice. 4/30/2025

DLEX9900S / DLGX9901S
DLEX9900B / DLGX9901B
LG SIGNATURE Front Load Dryer

IMPORTANT

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

DIMENSIONS

A Upper Ventilation Opening	≥ 48 sq. in. (310 cm2)
B Lower Ventilation Opening	≥ 24 sq. in. (155 cm2)
C Distance to Ventilation Opening	≥ 3"
D Overhead Cabinet Depth	≤ 14"
E Distance to the Overhead Cabinet/Shelf	≥ 18"
F Front Clearance	1"
G Depth	31 1/2"
H Back Clearance	≥ 5"
I Side Clearance	≥ 1"
J Width	29"
K Height of Cabinet Opening	40 7/8"
Carton Dimentions (in) (W x H x D)	30 15/16" x 44 11/16" x 33 3/16"

ENERGY


ENERGY STAR® Certified	Yes
CEF	3.94

POWER SOURCE

Ratings	CSA Listed
Electrical Requirements	240V 26 Amps (Electric) 120V, 13 Amps (Gas)


CONNECTING THE GAS SUPPLY

- Installation and service must be performed by a qualified installer, service agency, or the gas supplier.
- Use only a new stainless steel flexible connector and a new AGA-certified connector.
- A gas shutoff valve must be installed within 6 ft. (1.8 m) of the dryer.
- The dryer is configured for natural gas when shipped from the factory. Make sure that the dryer is equipped with the correct burner nozzle for the type of gas being used (natural gas or propane gas).
- If necessary, the correct nozzle (for the LP nozzle kit, order part number 383EEL3002D) should be installed by a qualified technician and the change should be noted on the dryer.
- All connections must be in accordance with local codes and regulations. Gas dryers MUST exhaust to the outdoors.

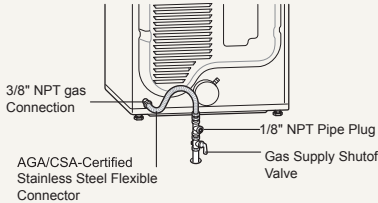


CONNECTING THE ELECTRIC SUPPLY

- A 4-wire connection is required for all mobile and manufactured home installations, as well as all new construction after January 1, 1996.
- A 3-wire connection is NOT permitted on new construction after January 1, 1996.
- A UL-listed strain relief is required.
- Use a 30-amp, 240-volt, 4-wire, UL-listed power cord with #10 AWG-minimum copper conductor and closed loop or forked terminals with upturned ends.




PRODUCT DIMENSIONS

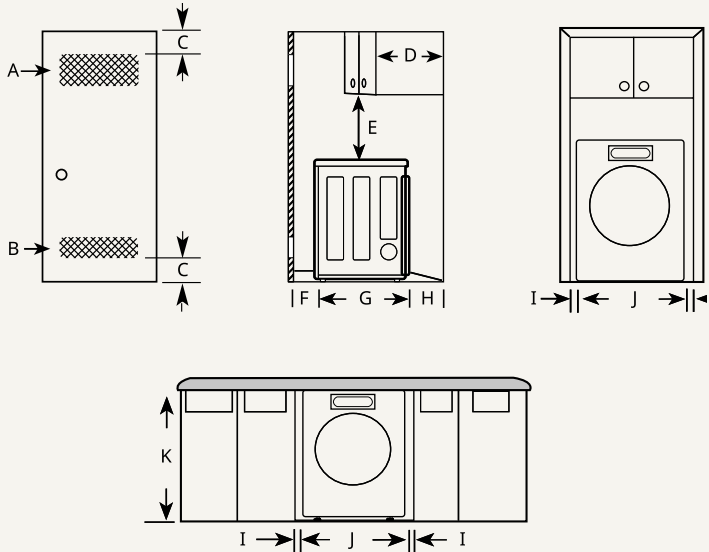

VENTING THE DRYER

Follow the guidelines below to maximize drying performance and reduce lint buildup and condensation in the ductwork. Ductwork and fittings are NOT included and must be purchased separately.

- Use 4-inch (10.2 cm) diameter rigid, semi-rigid or flexible metal ductwork.
- The exhaust duct run should be as short as possible.
- Use as few elbow joints as possible.
- The male end of each section of exhaust duct must point away from the dryer.
- Use duct tape on all duct joints.
- Insulate ductwork that runs through unheated areas in order to reduce condensation and lint buildup on duct surfaces.
- Incorrect or inadequate exhaust systems are not covered by the dryer warranty. Dryer failures or service required because of such exhaust systems will not be covered by the dryer warranty.

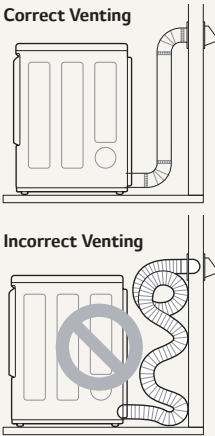

- Ductwork is not provided with the dryer. You should obtain the necessary ductwork locally. The vent hood should have hinged dampers to prevent backdraft when the dryer is not in use.
- The total length of flexible metal duct must not exceed 8 ft. (2.4 m).
- Deduct 6 ft. (1.8 m) for each additional elbow. Do not use more than four 90° elbows.

Wall Cap Type	Number of 90° Elbows	Maximum length of 4-inch diameter rigid metal duct
 Recommended	0	65 ft.(19.8 m)
	1	55 ft.(16.8 m)
	2	47 ft.(14.3 m)
	3	36 ft.(11.0 m)
 a: 4" (10.2 cm)	4	28 ft.(8.5 m)
	0	55 ft.(16.8 m)
	1	47 ft.(14.3 m)
	2	41 ft.(12.5 m)
 b: 2.5" (6.35 cm)	3	30 ft.(9.1 m)
	4	22 ft.(6.7 m)