# **ORE115**

# 15" Solid Door Refrigerator • Outdoor Collection









Stainless Solid

**Key Features** 

- Convection cooling system provides a quick cool down and consistent temperature
- Digital touch pad control with blue LED display
- Stainless steel cabinet, toe-kick, and full-wrap door
- Volume of 3.1 cu ft holds up to 61 bottles (12 oz) or cans (12 oz)
- Temperature range: 34°F 60°F
- Bright white LED lighting


- White interior
- Three adjustable tempered glass shelves
- Stainless steel handle (1/8" diameter)
- Field reversible door is shipped right-hand hinged
- Built-in or freestanding
- Four adjustable leveling legs
- Door lock model available

### **Model Details**


Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
UORE115-SS01A	115 / 60	Field Reversible	Stainless Solid	83 lb
UORE115-SS31A	115 / 60	Field Reversible	Stainless Solid (Lock)	83 lb

# 15" Solid Door Refrigerator • Outdoor Collection

# **Dimensions Front**




# 22 ½" (562 mm) (613 mm) 18 ½" (468 mm) 22 ½" (468 mm) 22 ½" (565 mm) (581 mm)

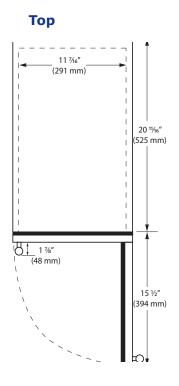


## **Specifications**

Model	ORE115	
Amps: Running	1.2	
Capacity: Bottle (12 oz)	61	
Capacity: Can (12 oz)	100	
Capacity: Volume (cu ft)	3.1	
Capacity: Wine Bottle (750 ml)	N/A	
Dimensions: Product Depth	22 <sup>1</sup> / <sub>4</sub> " / 562 mm	
Dimensions: Product Height	34 ½" / 867 mm	
Dimensions: Product Width	14 <sup>15</sup> / <sub>16</sub> " / 379 mm	
Energy Consumption: Avg. Per Year	225 kWh	
ENERGY STAR	Tier 3	
Product Weight: Max	83 lb	
Refrigerant Type:	R600a	
Sabbath (Star K Certified)	Yes	
Temperature Range	34°F - 60°F	

### Back



### **Cabinet Cut-Out**



### **Warranty**

- 1 Year (parts & labor) / 5 year sealed system (parts)
- 2 Year (parts & labor) / 5 year sealed system (parts) upgrade at no cost with product registration



# 2 Vear (narts & labor) / E year scaled system

### See complete warranty for details

### **Installation Notes**

- 15" cutout width sufficient if door protrudes beyond adjacent cabinetry
- No additional clearance is needed for ventilation
- Do not obstruct front grille air flow







