

# AZ91H09D2E/D3E/D5E

*GE Zoneline® Heat Pump Single Package  
Vertical Air Conditioner, 230/208 Volt*

## DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

### MINIMUM CLEARANCES:

#### FRONT-ACCESS CLOSETS

##### FRONT

- Allow 4 inches in front of unit.

##### SIDES

- Allow 3 inches on each side of unit.


##### OPTIONAL PLATFORM

- Field-supplied, refer to installation instructions.
- Platform height must coordinate with the height of the thru wall plenum.

#### SIDE-ACCESS CLOSETS

- Allow 12" in front of unit, 3-6" minimum on access side and 3" on opposite side.
- 30" opening on side with full manpower is optimal.
- Provide extra wiring to allow for power and thermostat connection prior to installation.

230/208 VOLT	AZ91H09D2E	AZ91H09D3E	AZ91H09D5E
Heater KW	2.5/2.05	3.4/2.78	5/4.09
Min. Circuit Amps	15	20	30
Recommended Protective Device	15 Amp Time Delay Fuse or Breaker	20 Amp Time Delay Fuse or Breaker	30 Amp Time Delay Fuse or Breaker



For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.

Specification Revised 9/19

# AZ91H09D2E/D3E/D5E

## GE Zoneline® Heat Pump Single Package Vertical Air Conditioner, 230/208 Volt

### FEATURES AND BENEFITS

Energy efficiency – Enhanced energy efficiency with an EER of 11.0

Cooling capacity – 9,500/9,000 BTU

Vertical space-saving design – Optimizes usable floor space with hidden closet design

Reliable & quiet – Every component is engineered to provide exceptional performance

Robust plenum gasket seals keep dirt outside and reduces chassis vibration

Corrosion treatment on outside coils

Standard filter size

Internal diagnostic program

Auxiliary fan ready


Room air sampling feature maintains a balanced temperature throughout the room

Remote wall thermostat capable

Model AZ91H09D2E – 15 amp

Model AZ91H09D3E – 20 amp

Model AZ91H09D5E – 30 amp

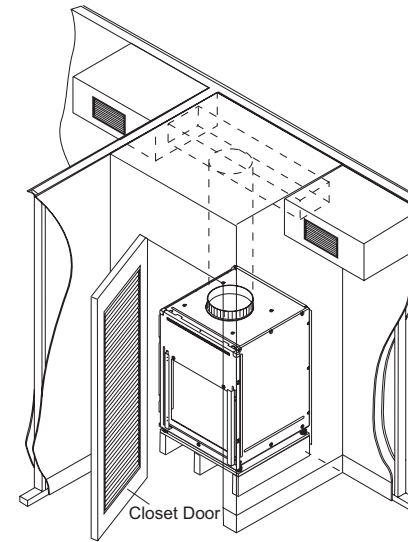

### ZONELINE® WARRANTY\*

#### WHAT IS COVERED

##### LIMITED ONE-YEAR WARRANTY

For one year from date of original purchase, we will provide, free of charge, parts and service labor on site to repair or replace any part of the Zoneline that fails because of a manufacturing defect.

##### LIMITED ADDITIONAL FOUR-YEAR WARRANTY

For an additional four years from the date of original purchase, we will provide, free of charge, parts and on-site service labor to repair or replace any part of the sealed refrigerating system (the compressor, condenser, evaporator and all connecting tubing) that fails because of a manufacturing defect.

\*SEE WRITTEN WARRANTY FOR DETAILS

##### LIMITED 2ND THROUGH 5TH YEAR PARTS WARRANTY

For the second through the fifth year from date of original purchase, General Electric will provide, free of charge, parts that fail as a result of a manufacturing defect. Parts covered are fan motors, switches, heater, heater protectors, compressor overload, solenoids, circuit boards, auxiliary controls, thermistors, frost controls, capacitors and varistors. This is a limited parts-only warranty, and does not include labor or transportation to and from the service shop.

All warranty service will be provided by our Factory Service Centers or by our authorized Customer Care® servicers during normal working hours.



For answers to your Monogram, GE Café™ Series, GE Profile™ Series or  
GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com)  
or call GE Answer Center® Service, 800.626.2000.