



# DM<sup>®</sup> NVX Series 4K60 4:4:4 HDR Network AV Encoders/Decoders

Product Manual  
Crestron Electronics, Inc.

The product warranty can be found at [www.crestron.com/legal/sales-terms-conditions-warranties](http://www.crestron.com/legal/sales-terms-conditions-warranties).

The specific patents that cover Crestron products are listed at [www.crestron.com/legal/patents](http://www.crestron.com/legal/patents).

Certain Crestron products contain open source software. For specific information, visit [www.crestron.com/legal/open-source-software](http://www.crestron.com/legal/open-source-software).

Crestron, the Crestron logo, Crestron Toolbox, Crestron XiO Cloud, DigitalMedia, DM, and DM XiO Director are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Dolby and Dolby Atmos are either trademarks or registered trademarks of Dolby Laboratories in the United States and/or other countries. DTS HD and DTS:X are either trademarks or registered trademarks of DTS, Inc. in the United States and/or other countries. HDMI and the HDMI logo are either trademarks or registered trademarks of HDMI Licensing LLC in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.



This document was written by the Technical Publications department at Crestron.  
©2018 Crestron Electronics, Inc.

# Contents

<b>Introduction .....</b>	<b>1</b>
<b>Physical Description.....</b>	<b>2</b>
DM-NVX-350 and DM-NVX-351.....	2
Front Panel.....	2
Rear Panel.....	3
DM-NVX-350C and DM-NVX-351C .....	5
<b>Configuration and Status.....</b>	<b>7</b>
DMF-CI-8 Chassis Details .....	8
Using the Web Interface.....	8
Using SIMPL Windows .....	8
DM XiO Director Network Appliance Details.....	9
Encoding and Decoding Functionality.....	9
Using the Web Interface.....	10
Using SIMPL Windows .....	10
Stream Statistics.....	11
Using the Web Interface.....	11
Using SIMPL Windows .....	11
Multicast TTL.....	11
Using the Web Interface.....	12
Using SIMPL Windows .....	12
DSCP.....	13
Automatic Routing of Video Inputs.....	14
Using the Web Interface.....	14
Using SIMPL Windows .....	14
Video Wall Processing.....	14
Using the Web Interface.....	15
Using SIMPL Windows .....	16
Adjustable Underscan .....	16
Using the Web Interface.....	16
Using SIMPL Windows .....	17
User-Selectable Output Resolution.....	17
Using the Web Interface.....	17
Using SIMPL Windows .....	17
Maximum Color Depth and Color Space Mode.....	18
Using the Web Interface.....	18
Using SIMPL Windows .....	19
EDID .....	19
Subscriptions .....	20
Using the Web Interface.....	21
Using SIMPL Windows .....	22
Daisy Chain .....	23
Switching Subscribed Transmitters.....	23
Switching Nonsubscribed Transmitters.....	24

7.1 Surround Sound Audio.....	25
Analog Audio Input or Output.....	25
Using the Web Interface.....	26
Using SIMPL Windows .....	27
Breakaway Audio .....	27
Using the Web Interface.....	27
Using SIMPL Windows .....	27
USB 2.0 Routing.....	28
Using the Web Interface.....	28
Using SIMPL Windows .....	29
Device Mode Locking.....	30
Crestron XiO Cloud Service Connection.....	31
Automatic Firmware Update.....	32
<b>HDCP 2.2 Compliance.....</b>	<b>33</b>
<b>IGMP Snooping .....</b>	<b>34</b>
<b>Troubleshooting.....</b>	<b>36</b>
<b>Appendix: Device Discovery .....</b>	<b>39</b>

# DM<sup>®</sup> NVX Series

## 4K60 4:4:4 HDR Network AV Encoders/Decoders

### Introduction

The Crestron<sup>®</sup> DM<sup>®</sup> NVX Series transports ultra high-definition 4K video with 60 Hz frame rates and 4:4:4 color sampling over standard Gigabit Ethernet. Support for High Dynamic Range (HDR) video and HDCP 2.2 ensures high picture quality and compatibility with a variety of media sources. Using JPEG 2000 compression and encoding, the DM NVX Series achieves a low end-to-end latency of 30 ms at 60 fps. The DM NVX Series accepts SFP (Small Form-factor Pluggable) transceiver modules (Crestron SFP-1G Series), which support multimode and single-mode fiber.

The DM NVX Series consists of the DM-NVX-350 and DM-NVX-351 stand-alone endpoints and the DM-NVX-350C and DM-NVX-351C cards. The cards are designed to occupy the DMF-CI-8 card chassis. The DM-NVX-351 and DM-NVX-351C provide the same functionality as the DM-NVX-350 and DM-NVX-350C with the addition of surround sound to stereo downmixing.

This manual provides information about the following:

- Physical description of the connectors, controls, and indicators on the DM NVX Series
- Configuration of some of the capabilities of the DM NVX Series, for example, encoding and decoding functionality
- HDCP 2.2 compliance
- IGMP snooping
- Troubleshooting guidelines

In addition, information about device discovery of a DM NVX device using Crestron Toolbox™ software is provided in the appendix of this manual. For installation information, refer to the DM-NVX-350/DM-NVX-351 DO Guide (Doc. 7799) and the DM-NVX-350C/DM-NVX-351C DO Guide (Doc. 7975). For information about designing a DM NVX system, refer to the DigitalMedia NVX System Design Guide (Doc. 7977). The manuals are available at [www.crestron.com/manuals](http://www.crestron.com/manuals).

# Physical Description

The following sections provide information about the connectors, controls, and indicators that are available on the DM NVX Series.


## DM-NVX-350 and DM-NVX-351

This section provides information about the connectors, controls, and indicators that are available on the front and rear panels of the DM-NVX-350 and DM-NVX-351 stand-alone endpoints.

### Front Panel

The following illustration shows the front panel of the DM-NVX-350 and DM-NVX-351.

**DM-NVX-350 and DM-NVX-351 Front Panel**

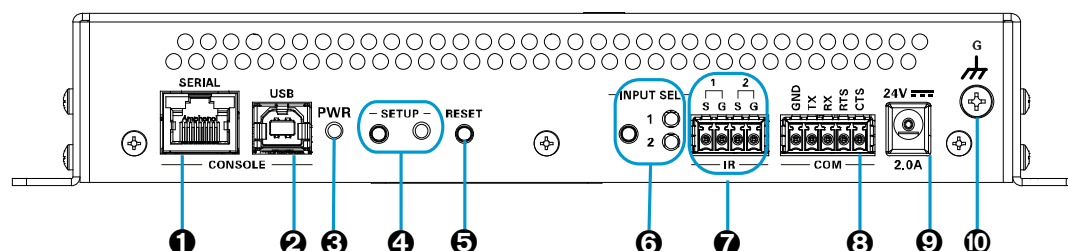

- ❶ **CONSOLE, SERIAL:** 8-pin RJ-45 female; RS-232 computer console port (for setup)
- ❷ **CONSOLE, USB:** USB Type B female; USB 2.0 computer console port (for setup)
- ❸ **PWR:** Bicolor green/amber LED, indicates operating power supplied via the power pack or injector, turns amber while booting and green when operating
- ❹ **SETUP:** Push button to display the IP address or to set the operating mode (transmitter or receiver). Red LED indicates that the SETUP button is pressed and times out automatically.

**NOTE:** When the **SETUP** button is pressed for 10 seconds, a message appears on the display stating that the button must be pressed again to change the operating mode. Pressing the button a second time changes the operating mode from a receiver to a transmitter or from a transmitter to a receiver and reboots the device.

The **SETUP** button can be used to change the operating mode only if **Device Mode Lock** on the Device page is set to **Disabled**. For additional information, refer to "Device Mode Lock" on page 30.


- ❺ **RESET:** Recessed push button for hardware reset
- ❻ **INPUT SEL:** Push button for manual input selection and two bicolor green/amber LEDs. Green LED indicates that the corresponding input is selected. Amber LED indicates that the corresponding input is detected but is not selected.

- ⑦ **IR 1-2:** 4-pin 3.5 mm detachable terminal block;  
Comprises two IR/serial ports<sup>1</sup>  
IR output up to 1.1 MHz;  
1-way serial TTL/RS-232 (0-5 volts) up to 19200 baud
- ⑧ **COM:** 5-pin 3.5 mm detachable terminal block;  
Bidirectional RS-232 port;<sup>1</sup>  
Up to 115.2k baud, hardware and software handshaking support
- ⑨ **24VDC 2.0A:** 2.1 x 5.5 mm dc power connector;  
24 Vdc power input;  
Power pack included
- ⑩ **Ground:** 6-32 screw;  
Chassis ground lug

## Rear Panel

The following illustration shows the rear panel of the DM-NVX-350 and DM-NVX-351.

### DM-NVX-350 and DM-NVX-351 Rear Panel

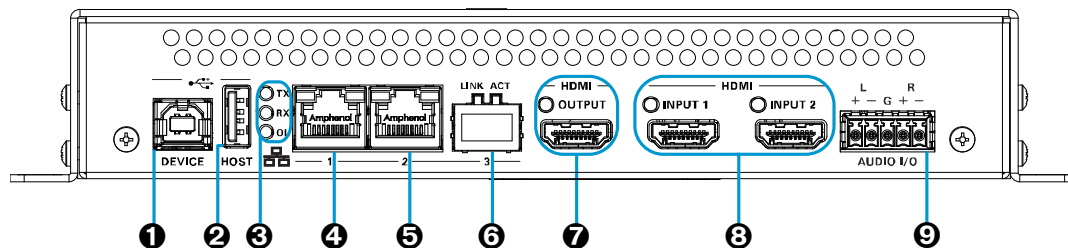

- ① **DEVICE:** USB Type B female;  
USB 2.0 device port;  
USB signal extender port for connection to a computer or any other USB 2.0 host<sup>2</sup>
- ② **HOST:** USB Type A female;  
USB 2.0 host port;  
USB signal extender port for connection of a mouse, keyboard, or any other USB 2.0 device;<sup>2</sup>  
Available Power: 500 mA at 5 Vdc
- ③ **TX, RX, and OL LEDs:** Green TX LED indicates that unit is in transmitter (encoder) mode;  
Green RX LED indicates that unit is in receiver (decoder) mode;  
Green OL LED indicates an online connection to a control system via Ethernet

<sup>1</sup> Device control via RS-232, IR, CEC, or Ethernet requires integration with a Crestron control system.

<sup>2</sup> The DEVICE and HOST ports cannot be used simultaneously.

- ④ **LAN 1:** 8-pin RJ-45 female;  
10BASE-T/100BASE-TX/1000BASE-T Ethernet port;<sup>1</sup>  
PD (powered device) port compatible with Crestron DM-PSU-ULTRA-MIDSPAN;<sup>2</sup>  
Green LED indicates Ethernet link status;  
Amber LED indicates Ethernet activity
- ⑤ **LAN 2:** 8-pin RJ-45 female;  
10BASE-T/100BASE-TX/1000BASE-T Ethernet port;<sup>1</sup>  
Green LED indicates Ethernet link status;  
Amber LED indicates Ethernet activity
- ⑥ **LAN 3:** SFP port;  
Accepts one Crestron SFP-1G Series SFP transceiver module;<sup>3</sup>  
Green LINK LED indicates Ethernet link status;  
Green ACT LED indicates Ethernet activity
- ⑦ **HDMI OUTPUT:** 19-pin Type A HDMI® female connector;  
HDMI digital video/audio output (DVI compatible);<sup>4</sup>  
Green LED indicates video signal transmission at the HDMI output
- ⑧ **HDMI INPUTS 1–2:** 19-pin Type A HDMI female connectors;  
HDMI digital video/audio inputs (DVI and Dual-Mode DisplayPort compatible);<sup>4</sup>  
Two green LEDs, each indicates sync detection at the corresponding HDMI input
- ⑨ **AUDIO I/O:** 5-pin 3.5 mm detachable terminal block;  
Balanced/unbalanced stereo line-level audio input or output;  
Input Impedance: 24k Ohms balanced/unbalanced;  
Maximum Input Level: 4 Vrms balanced, 2 Vrms unbalanced;  
Output Impedance: 200 Ohms balanced, 100 Ohms unbalanced;  
Maximum Output Level: 4 Vrms balanced, 2 Vrms unbalanced

---

<sup>1</sup> Either LAN 1 or LAN 2 can be used as the primary LAN connection, allowing the other port to be used for connection to a local network device or to another DM NVX device. If one of the ports is used as the primary LAN connection, the port requires connection to a 1000BASE-T switch in order to stream network video.

<sup>2</sup> The DM-NVX-350 and DM-NVX-351 can be powered by the connection of LAN 1 to a Crestron DM-PSU-ULTRA-MIDSPAN or other Crestron approved power injector (sold separately). For additional information, refer to Answer ID 5791 in the Online Help section of the Crestron website ([www.crestron.com/onlinehelp](http://www.crestron.com/onlinehelp)). The DM-NVX-350 and DM-NVX-351 can also be powered using the included power pack.

<sup>3</sup> LAN 3 can be used as the primary LAN connection or can be connected to another DM NVX device. LAN 3 can connect to a fiber-optic network using the appropriate Crestron SFP-1G transceiver module (sold separately). Refer to the SFP-1G Series Installation Guide (Doc. 7979) for information about installing Crestron SFP-1G Series transceiver modules.

<sup>4</sup> HDMI connections require an appropriate adapter or interface cable to accommodate a DVI or Dual-Mode DisplayPort signal. CBL-HD-DVI interface cables are sold separately.




## DM-NVX-350C and DM-NVX-351C

The following illustration shows the connectors, controls, and indicators that are available on the DM-NVX-350C.

**NOTE:** For illustrative purposes, only the DM-NVX-350C is shown below. The DM-NVX-351C contains the same connectors, controls, and indicators as the DM-NVX-350C.

### DM-NVX-350C

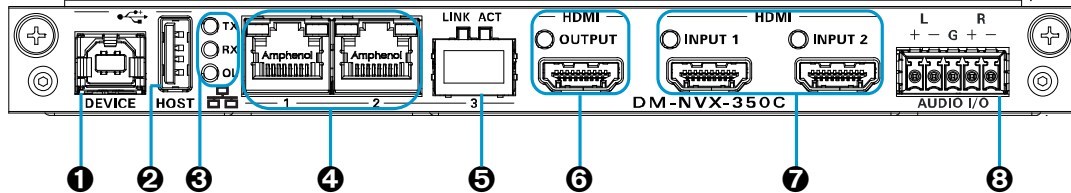

- 1 DEVICE:** USB Type B female;  
USB 2.0 device port;  
USB signal extender port for connection to a computer or any other USB 2.0 host<sup>1</sup>
- 2 HOST:** USB Type A female;  
USB 2.0 host port;  
USB signal extender port for connection of a mouse, keyboard, or any other USB 2.0 device;<sup>1</sup>  
Available Power: 500 mA at 5 Vdc
- 3 TX, RX, and OL LEDs:** Green TX LED indicates that unit is in transmitter (encoder) mode;  
Green RX LED indicates that unit is in receiver (decoder) mode;  
Green OL LED indicates an online connection to a control system via Ethernet
- 4 LAN 1-2:** 8-pin RJ-45 female;  
10BASE-T/100BASE-TX/1000BASE-T Ethernet ports<sup>2</sup>  
Green LED indicates Ethernet link status;  
Amber LED indicates Ethernet activity
- 5 LAN 3:** SFP port;  
Accepts one Crestron SFP-1G Series SFP transceiver module;<sup>3</sup>  
Green LINK LED indicates Ethernet link status;  
Green ACT LED indicates Ethernet activity

<sup>1</sup> The DEVICE and HOST ports cannot be used simultaneously.

<sup>2</sup> Either LAN 1 or LAN 2 can be used as the primary LAN connection, allowing the other port to be used for connection to a local network device or to another DM NVX device. If one of the ports is used as the primary LAN connection, the port requires connection to a 1000BASE-T switch in order to stream network video.

<sup>3</sup> LAN 3 can be used as the primary LAN connection or can be connected to another DM NVX device. LAN 3 can connect to a fiber-optic network using the appropriate Crestron SFP-1G transceiver module (sold separately). Refer to the SFP-1G Series Installation Guide (Doc. 7979) for information about installing Crestron SFP-1G Series transceiver modules.

- ⑥ **HDMI OUTPUT:** 19-pin Type A HDMI female;  
HDMI digital video/audio output (DVI compatible)\*
- ⑦ **HDMI INPUTS 1-2:** 19-pin Type A HDMI female;  
HDMI digital video/audio inputs (DVI and Dual-Mode DisplayPort compatible)\*
- ⑧ **AUDIO I/O:** 5-pin 3.5 mm detachable terminal block;  
Balanced/unbalanced stereo line-level audio input or output;  
Input Impedance: 24k Ohms balanced/unbalanced;  
Maximum Input Level: 4 Vrms balanced, 2 Vrms unbalanced;  
Output Impedance: 200 Ohms balanced, 100 Ohms unbalanced;  
Maximum Output Level: 4 Vrms balanced, 2 Vrms unbalanced

---

\* HDMI connections require an appropriate adapter or interface cable to accommodate a DVI or Dual-Mode DisplayPort signal. CBL-HD-DVI interface cables are sold separately.

# Configuration and Status

The DM NVX Series can be configured using the web interface, which can be accessed from a web browser by entering the IP address or hostname of the device. SIMPL Windows can also be used to configure the DM NVX Series. In addition, status information can also be viewed.

This section provides information about the following items that can be configured or viewed using the web interface or SIMPL Windows:

- DMF-CI-8 chassis details
- DM XiO Director™ network appliance details
- Encoding and decoding functionality
- Stream statistics
- Multicast TTL
- DSCP
- Automatic routing of video inputs
- Video wall processing
- Adjustable underscan
- User-selectable output resolution
- Maximum color depth and color space mode
- EDID
- Subscriptions
- Daisy chain
- 7.1 Surround sound audio
- Analog audio input or output
- Breakaway audio
- USB 2.0 routing
- Device mode locking
- Crestron XiO Cloud™ service connection
- Automatic firmware update

## DMF-CI-8 Chassis Details

**NOTE:** DMF-CI-8 chassis details apply only to the DM NVX cards and do not apply to the DM NVX stand-alone endpoints.


DMF-CI-8 chassis information can be viewed using the web interface or SIMPL Windows.

### Using the Web Interface

For a DM NVX card, view DMF-CI-8 chassis information on the Status page. The **Chassis Details** section of the page displays the following information:

- Serial number of the chassis in which the card is installed
- Slot number in which the card is installed in the chassis

#### Status Page – Chassis Details

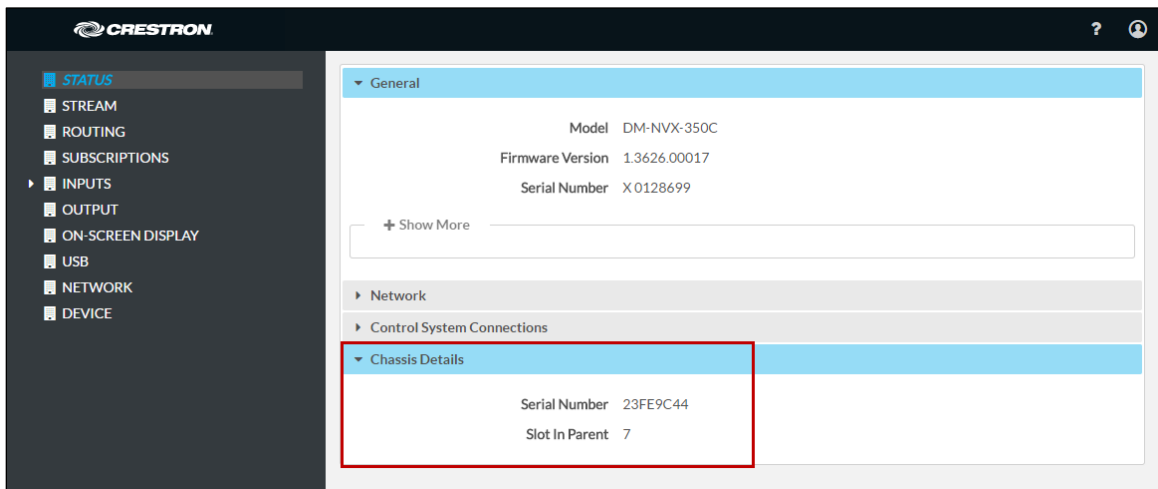

### Using SIMPL Windows

Using the top-level programming slot for the DM NVX card, program the **<ChassisSerialNumber\_F>** serial output join to report the serial number of the chassis in which the card is installed. Program the **<CardSlotInfo\_F>** serial output join to report the slot number in which the card is installed in the chassis.


## DM XiO Director Network Appliance Details

If a DM NVX device is managed by a DM XiO Director network appliance, DM XiO Director network appliance details can be viewed using the web interface.

View DM XiO Director network appliance details on the Status page. The **DM XiO Director** section of the page displays the following information:

- DM XiO Director network appliance host name
- Domain name, number, and slot number to which the DM NVX device is assigned

### Status Page – DM XiO Director Network Appliance Details

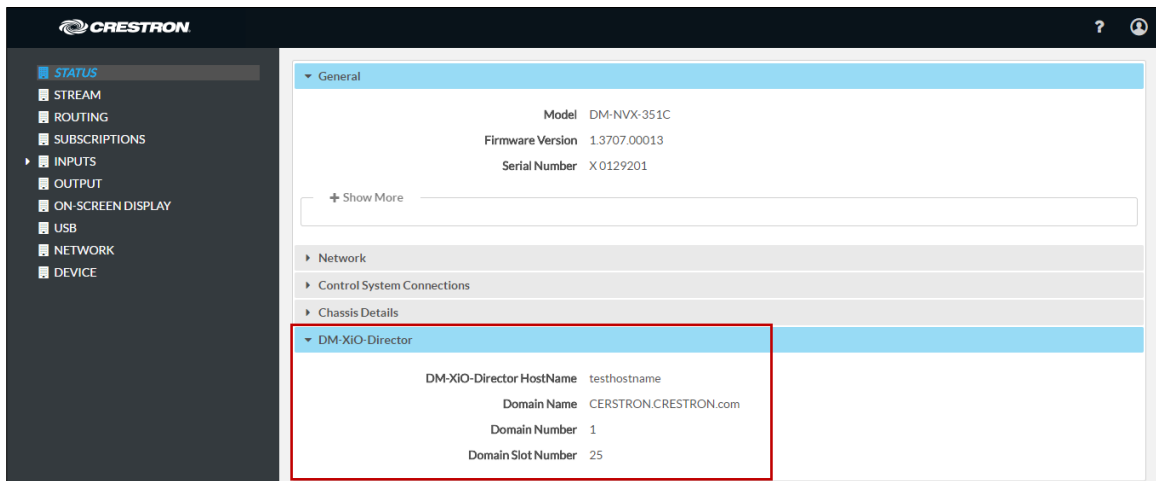

## Encoding and Decoding Functionality

A DM NVX device can be configured to function as a network AV encoder (transmitter) or decoder (receiver):

- As an encoder, a DM NVX device allows a laptop computer, camera, or other media source to be connected via an HDMI cable and then transmitted over the network.
- As a decoder, a DM NVX device receives the signal from a DM NVX encoder and feeds the signal to a display device via the HDMI output. A DM NVX decoder can switch streams among multiple DM NVX encoders on the network alongside locally connected HDMI sources.

To set the operating mode of a DM NVX device as a transmitter or receiver, use the web interface or SIMPL Windows as discussed in the following sections.


**NOTE:** For a DM NVX stand-alone endpoint, the SETUP button can also be used to set the operating mode as a transmitter or receiver. For additional information, refer to the description of the SETUP button on page 2.

For a DM NVX card, the front panel of the DMF-CI-8 chassis can be used to set the operating mode. For additional information, refer to the DMF-CI-8 Supplemental Guide (Doc. 7861).

## Using the Web Interface


Set the operating mode of the DM NVX device on the Stream page. In the **Mode** drop-down list, select **Receiver** or **Transmitter**. The default setting is **Receiver** (decoder).

### Stream Page - Mode Configuration

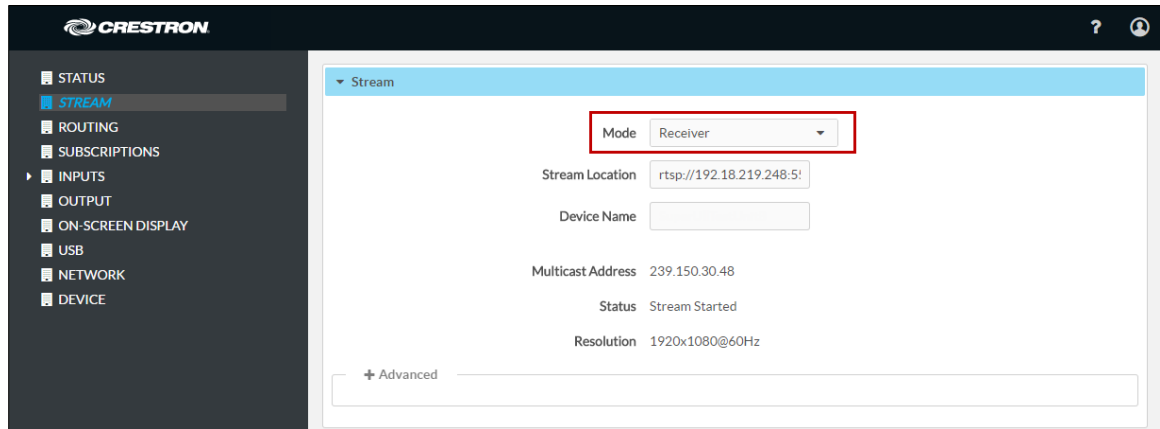

When a different mode is selected, a prompt appears asking for confirmation that the device be rebooted. Click **Yes** to reboot the device.

### Device Reboot Prompt

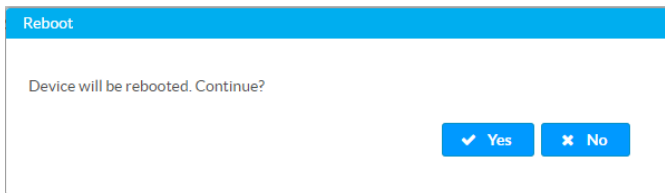

For additional information, refer to the online help of the web interface.

## Using SIMPL Windows

Using the top-level programming slot for the DM NVX device, set the **<DeviceMode>** analog input join to the desired mode (**Receiver** or **Transmitter**). The default setting is **Receiver**.

Changing modes requires that the device be rebooted. Trigger the **<Reboot>** digital input join to reboot the device. For additional information, refer to the SIMPL Windows help file.


## Stream Statistics

Statistics can be displayed to indicate the number of packets received or transmitted, the number of dropped packets, and the bit rate of the received or transmitted stream. To enable or disable stream statistics, use the web interface or SIMPL Windows as discussed in the following sections.

### Using the Web Interface

Configure stream statistics on the Stream page. In the **Statistics** section of the page, set **Statistics** to **Enable** or **Disable**. To reset statistics, click **Reset Statistics**. For additional information, refer to the online help of the web interface.

#### Stream Page - Statistics Configuration

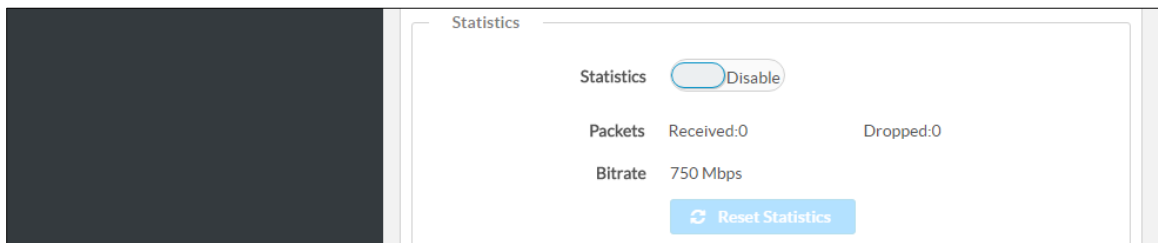

### Using SIMPL Windows

Configure stream statistics in **Slot-01: Stream Transmit** or **Slot-02: Stream Receive**. Trigger the **<StatisticsEnabled>** digital input join to enable the reporting of statistics. To disable statistics, trigger the **<StatisticsDisabled>** digital input join. To clear the statistics, trigger the **<ResetStatistics>** digital input join. The corresponding serial joins are updated when the digital input joins are triggered. For additional information, refer to the SIMPL Windows help file.

## Multicast TTL

---

**NOTE:** Multicast TTL (time-to-live) applies only to a DM NVX device that is operating as a transmitter.

---

Multicast TTL provides the ability to limit or extend the hop limit of a DM NVX stream that traverses routers. In IPv4 multicasting, routers have a TTL threshold assigned to each interface. Only multicast packets with a TTL greater than the threshold of the interface are forwarded.

Multicast TTL can be set to any value ranging from **1** to **255**. The default setting is **5**.

To set a multicast TTL value, use the web interface or SIMPL Windows.

## Using the Web Interface

Configure multicast TTL on the Stream page. In the **Advanced** section of the page, set a multicast TTL value:


1. Set **Auto Initiation** to **Disabled**.
2. Stop the stream by clicking **Stop**.
3. Select the **Custom TTL** checkbox.
4. Enter the desired TTL value (1 to 255).
5. Set **Auto Initiation** to **Enabled**. The stream automatically restarts.

---

**NOTE:** Deselecting the **Custom TTL** checkbox returns the TTL value to the default setting.

---

### Stream Page - Multicast TTL Configuration

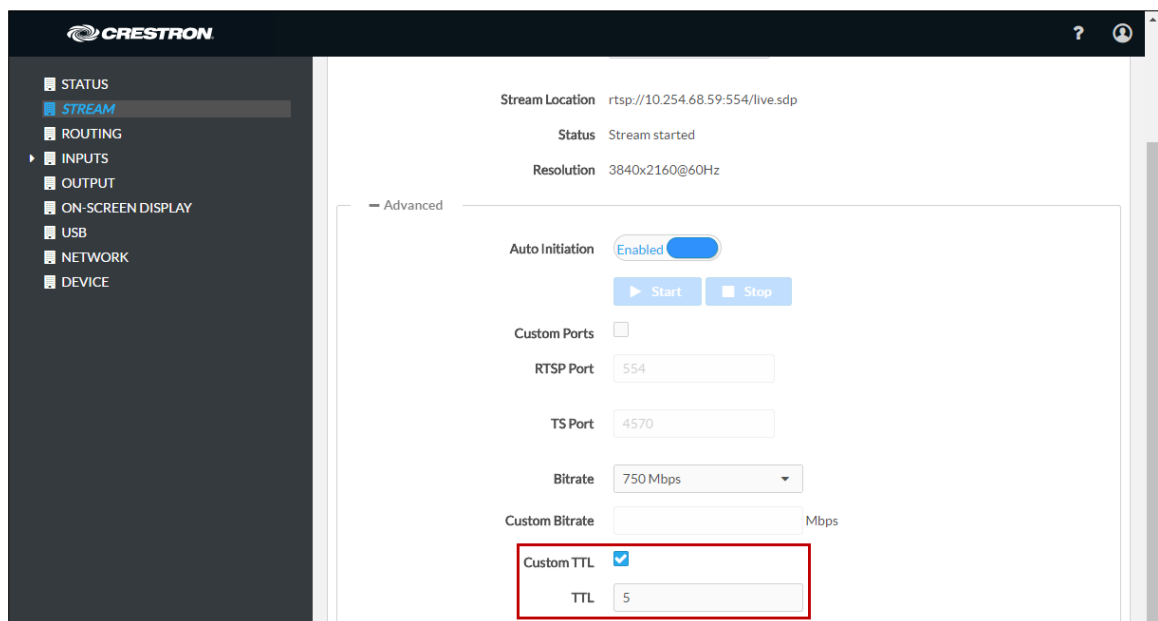

## Using SIMPL Windows

Configure multicast TTL as follows:

1. Using the top-level programming slot:
  - a. Trigger the **<AutomaticInitiationDisabled>** digital input join.
  - b. Trigger the **<Stop>** digital input join.
2. In **Slot-01: Stream Transmit**, set the **<MulticastTTL>** analog input join to the desired value (1 to 255).
3. Using the top-level programming slot, trigger the **<AutomaticInitiationEnabled>** digital input join. The stream automatically restarts.

For additional information, refer to the SIMPL Windows help file.



## DSCP

**NOTE:** DSCP (Differentiated Services Code Point) applies only to a DM NVX device that is operating as a transmitter.

To implement Quality of Service (QoS), IP networks use the DSCP value. Within an IP packet header, the DSCP defines a value from 0 to 63 that maps to a certain traffic classification. Based on IT department policies, DSCP values are used within a network to determine the treatment of packets in router queues, the routes of traffic flows, and per-hop behavior. By default, DSCP is set to **32**.

**NOTE:** Change the DSCP default setting of **32** only if required by IT department policies.

Configure DSCP on the Stream page. In the **Advanced** section of the page, set a DSCP value:

1. Set **Auto Initiation** to **Disabled**.
2. Stop the stream by clicking **Stop**.
3. Select the **Custom DSCP** checkbox.
4. Enter the desired DSCP value (**0** to **63**).
5. Set **Auto Initiation** to **Enabled**. The stream automatically restarts.

**NOTE:** Deselecting the DSCP checkbox returns the DSCP value to the default setting.

### Stream Page - DSCP Configuration

The screenshot shows the Crestron Stream Page configuration interface. On the left is a dark sidebar with a menu containing: STATUS, STREAM (highlighted), ROUTING, INPUTS, OUTPUT, ON-SCREEN DISPLAY, USB, NETWORK, and DEVICE. The main content area has a top section with 'Stream Location' (rtsp://10.254.68.128:554/live.sdp), 'Status' (Stream started), and 'Resolution' (1920x1080@60Hz). Below this is an 'Advanced' section. In the 'Advanced' section, 'Auto Initiation' is set to 'Enabled' with a blue toggle switch. There are 'Start' and 'Stop' buttons. Below these are 'Custom Ports' (unchecked), 'RTSP Port' (554), and 'TS Port' (4570). Then 'Bitrate' is set to '750 Mbps' in a dropdown menu, followed by 'Custom Bitrate' (empty) and 'Mbps'. Below that is 'Custom TTL' (unchecked) and 'TTL' (5). At the bottom, 'Custom DSCP' is checked with a blue checkbox, and the 'DSCP' value is set to '32' in a text field. A red rectangle highlights the 'Custom DSCP' checkbox and the 'DSCP' value field.

## Automatic Routing of Video Inputs


Automatic routing between video inputs can be enabled or disabled. When automatic routing is enabled, the device automatically routes the last connected input.

To configure automatic routing, use the web interface or SIMPL Windows as discussed in the following sections.

### Using the Web Interface

Configure automatic routing of video inputs on the Routing page. In the **Input Routing** section of the page, set **Automatic Input Routing** to **Enabled** or **Disabled**. The default setting is **Enabled**. For additional information, refer to the online help of the web interface.

#### Routing Page - Automatic Input Routing Configuration

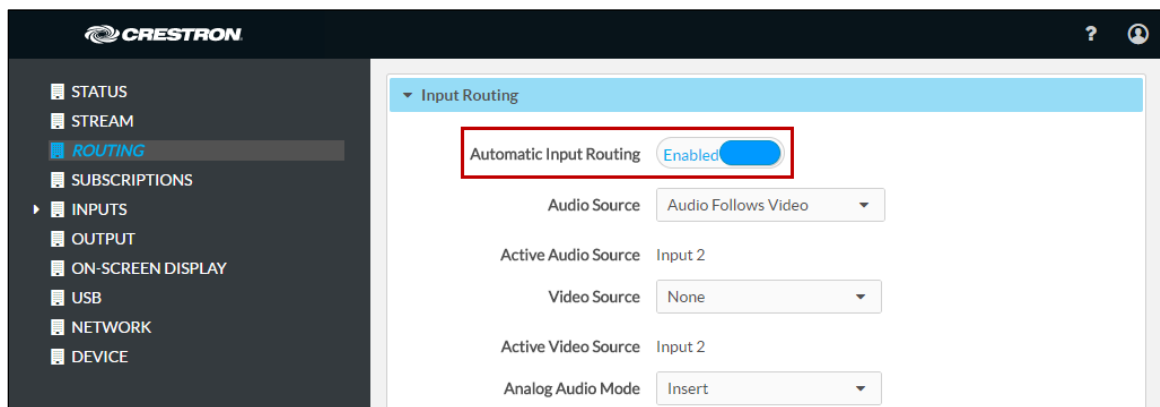

### Using SIMPL Windows

Using the top-level programming slot for the DM NVX device, trigger the **<AutomaticRoutingEnabled>** digital input join to enable automatic routing. To disable automatic routing, trigger the **<AutomaticRoutingDisabled>** digital input join. For additional information, refer to the SIMPL Windows help file.

## Video Wall Processing

**NOTE:** Video wall processing applies only to DM NVX devices that function as receivers.

Multiple DM NVX receivers can be combined to configure a video wall composed of up to 64 individual displays (up to eight columns of displays by eight rows of displays). A separate DM NVX device is required for each display.

To configure a video wall, use the web interface or SIMPL Windows as discussed in the following sections.

## Using the Web Interface

Configure video wall processing on the Output page. In the **Layout** section of the page:

1. Select the **Video Wall** radio button.
2. In the **Width** combo box, select the desired number of rows of displays.
3. In the **Height** combo box, select the desired number of columns of displays.
4. Set the location of the display in the video wall by clicking the appropriate box.
5. Repeat steps 1-4 for each DM NVX receiver that connects to a display for inclusion in the video wall.

For additional information, refer to the online help of the web interface.

### Output Page - Video Wall Configuration

The screenshot displays the Crestron web interface for configuring the Output page. The left sidebar contains a navigation menu with the following items: STATUS, STREAM, ROUTING, SUBSCRIPTIONS, INPUTS, OUTPUT (highlighted), ON-SCREEN DISPLAY, USB, NETWORK, and DEVICE. The main content area is divided into several sections:

- Connected Display:** Shows Sink Connected (checked), Manufacturer (CEI), Name (Crestron 420), and Serial Number (0).
- Output Signal:** Shows Transmitting (checked) and Resolution (3840x2160@60). A '+ More Details' button is present.
- Analog Settings:** Includes an Analog Audio Volume slider set to 0.
- Layout:** This section is highlighted with a red border. It features a 'Revert' button and a 'Save Changes' button. Below these are dropdown menus for 'Width' (set to 3) and 'Height' (set to 2). A 'Layout' section shows a 2x3 grid of display boxes. The top-left box is highlighted in green. To the left of the grid are radio buttons for 'Video Wall' (selected) and 'Full Screen'. The grid is labeled with '1' and '2' for rows and '1', '2', and '3' for columns.

## Using SIMPL Windows

Configure a video wall in **Slot-06: HDMI OUT**:

1. Set the <VideoWallMode>, <Horizontal\_Bezel\_Compensation>, and <Vertical\_Bezel\_Compensation> analog input joins to the desired values.
2. Repeat step 1 for each DM NVX receiver that connects to a display for inclusion in the video wall.

For additional information, refer to the SIMPL Windows help file.

## Adjustable Underscan

**NOTE:** Adjustable underscan applies only to a DM NVX device that functions as a receiver.

If content does not fit properly on a display, adjustments to underscan may be desired. Adjusting underscan reduces the image size by the specified percentage so that the entire video frame is displayed.

To adjust underscan, use the web interface or SIMPL Windows as discussed in the following sections.

## Using the Web Interface

Configure underscan on the Output page. In the **HDMI Output Setting** section of the page, configure underscan in the **Underscan** drop-down list by selecting the desired percentage or by selecting **Custom**. If **Custom** is selected, enter the desired percentage. For additional information, refer to the online help of the web interface.

### Output Page - Underscan Configuration

The screenshot displays the Crestron web interface for configuring the HDMI Output. On the left is a dark sidebar with a menu containing: STATUS, STREAM, ROUTING, SUBSCRIPTIONS, INPUTS (expanded), OUTPUT (highlighted in blue), ON-SCREEN DISPLAY, USB, NETWORK, and DEVICE. The main content area is titled 'HDMI Output Setting' and contains the following settings:

- Disable Output: ☐ No
- Name: OUTPUT 1
- Resolution: Auto
- Aspect Ratio Mode: Maintain Aspect Ratio
- HDCP Transmitter Mode: Auto
- Max Color Depth: 8-bit mode
- Color Space Mode: Auto
- Color Depth: 8-bit mode
- Color Space: Y420
- Underscan: 0% (This dropdown is highlighted with a red rectangular box)

A 'Set' button is located at the bottom right of the settings area.

## Using SIMPL Windows

Adjust underscan in **Slot-06: HDMI Out**. Set the **&ltUnderscan>** analog input join to the desired value. For additional information, refer to the SIMPL Windows help file.

## User-Selectable Output Resolution


**NOTE:** User-selectable output resolution applies only to a DM NVX device that functions as a receiver.

To select the desired output resolution, use the web interface or SIMPL Windows as discussed in the following sections.

### Using the Web Interface

Configure the output resolution on the Output page. In the **HDMI Output Setting** section of the page, select the desired resolution in the **Resolution** drop-down list. For additional information, refer to the online help of the web interface.

#### Output Page - HDMI Output Resolution Configuration

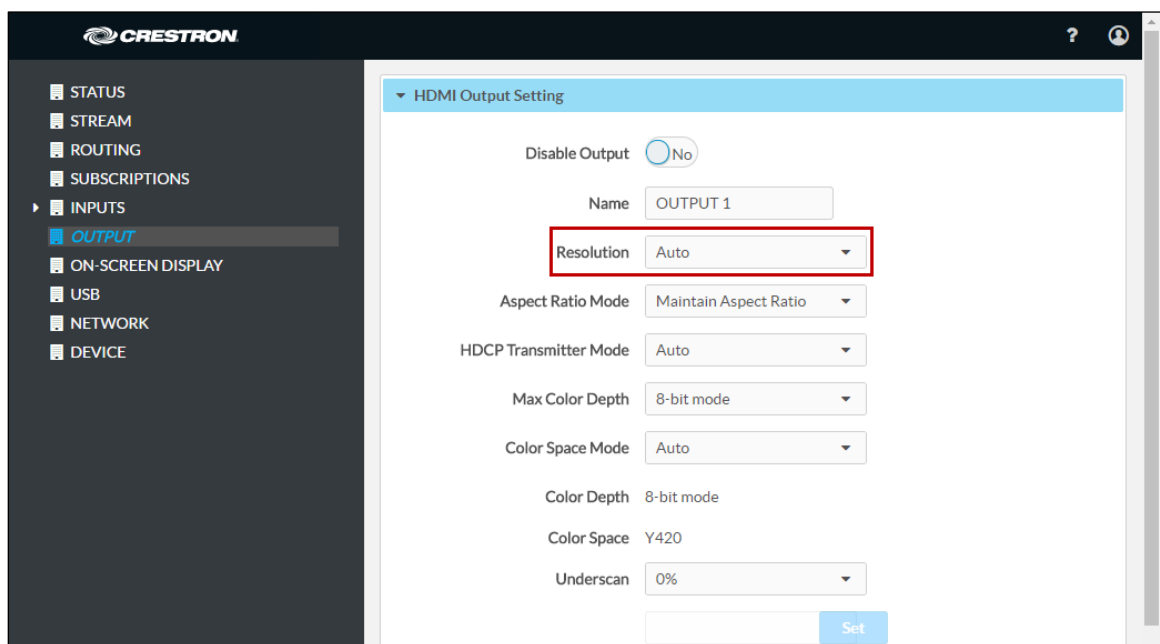

### Using SIMPL Windows

Configure the output resolution in **Slot-06: HDMI Out**. Set the **&ltResolution>** analog input join to the desired value. For additional information, refer to the SIMPL Windows help file.

## Maximum Color Depth and Color Space Mode

Configure the maximum color depth (maximum bit depth supported by the output) and HDMI color space mode using the web interface or SIMPL Windows.

### Using the Web Interface

Configure maximum color depth and color space mode on the Output page. In the **HDMI Output Setting** section of the page:

- Configure maximum color depth in the **Max Color Depth** drop-down list by selecting the desired setting.

---

**NOTE:** If HDR video is desired at the output, set **Max Color Depth** to **10-bit mode**.

---

- Configure color space mode in the **Color Space Mode** drop-down list by selecting the desired setting.

---

**NOTE:** If HDR video is desired at the output, set Color Space Mode to **Force Y422** or **Force Y420**.

---

For additional information, refer to the online help of the web interface.

### Output Page - HDMI Output Maximum Color Depth and Color Space Mode

The screenshot displays the Crestron web interface for the 'HDMI Output Setting' page. On the left is a dark sidebar with a menu including STATUS, STREAM, ROUTING, SUBSCRIPTIONS, INPUTS, OUTPUT (highlighted), ON-SCREEN DISPLAY, USB, NETWORK, and DEVICE. The main content area has a light blue header 'HDMI Output Setting'. Below this, there are several settings: 'Disable Output' (a toggle switch set to 'No'), 'Name' (a text field with 'OUTPUT 1'), 'Resolution' (a dropdown menu set to 'Auto'), 'Aspect Ratio Mode' (a dropdown menu set to 'Maintain Aspect Ratio'), and 'HDCP Transmitter Mode' (a dropdown menu set to 'Auto'). A red rectangular box highlights the 'Max Color Depth' and 'Color Space Mode' settings. 'Max Color Depth' is a dropdown menu set to '8-bit mode', and 'Color Space Mode' is a dropdown menu set to 'Auto'. Below these, the 'Color Depth' is displayed as '8-bit mode', 'Color Space' is displayed as 'Y420', and 'Underscan' is a dropdown menu set to '0%'. At the bottom right of the settings area is a blue 'Set' button.

## Using SIMPL Windows

Configure maximum color depth and color space mode in **Slot-06: HDMI Out**. Set the **<MaximumColorDepth>** analog input join to the appropriate value for the maximum bit depth supported by the output. Set the **<ColorSpaceMode>** analog input join to the desired value for the HDMI color space.

---

**NOTE:** If HDR video is desired at the output, set the **<MaximumColorDepth>** analog input join to 10-bit maximum bit depth and the **<ColorSpaceMode>** analog input join to Force YCbCr422 or Force YCbCr420.

---

For additional information, refer to the SIMPL Windows help file.

## EDID

EDID (Extended Display Identification Data) configuration allows management of the EDID that is to be sent to the upstream device connected to an HDMI input of a DM NVX device. If an EDID other than the default EDID is desired, use the web interface to configure the EDID.

Configure EDID on the main Inputs page or on the input-specific page of the web interface:

- On the main Inputs page, do either of the following:
  - In the **Global EDID** section of the page, set a global EDID for all inputs. A custom EDID file can also be loaded and sent to all inputs if desired.
  - In the **Global Inputs** section of the page, set the EDID individually for each input.
- On the input-specific page (HDMI Input 1 or HDMI Input 2), set the desired EDID in the **EDID** section of the page.

For additional information, refer to the online help of the web interface.

## Main Inputs Page - EDID Configuration

CRESTRON

STATUS  
STREAM  
ROUTING  
SUBSCRIPTIONS  
INPUTS  
OUTPUT  
ON-SCREEN DISPLAY  
USB  
NETWORK  
DEVICE

Global EDID

Send EDID to all Inputs 4K60 444 2CH Non-HDR

Load CEDID file

Apply EDID Delete

Global Inputs

Sync	Name	EDID	HDCP Receiver Capability	Actions
No	INPUT 1	4K60 444 2CH	Auto	
Yes	INPUT 2	4K60 444 2CH	Auto	

Save All

## Input-Specific Page - EDID Configuration (HDMI Input 1 Page Shown)

CRESTRON

STATUS  
STREAM  
ROUTING  
SUBSCRIPTIONS  
INPUTS  
HDMI INPUT 1  
HDMI INPUT 2  
OUTPUT  
ON-SCREEN DISPLAY  
USB  
NETWORK  
DEVICE

General Settings

Name INPUT 1

HDCP Receiver Capability Auto

Color Depth 8-bit mode

Color Space Unknown

EDID

Select 4K60 444 2CH Non-HDR

Load CEDID file

Apply EDID Delete

## Subscriptions

**NOTE:** Subscriptions apply only to a DM NVX device that functions as a receiver.

Subscription of a DM NVX transmitter to a DM NVX receiver sets up Real Time Streaming Protocol (RTSP) negotiation between the DM NVX receiver and the DM NVX transmitter. When a stream is routed, the DM NVX receiver performs the Internet Group Management Protocol (IGMP) join, which causes the receiver to join the multicast group of the transmitter. A maximum of 64 transmitters can be subscribed to a single receiver.

To configure subscriptions, use the web interface or SIMPL Windows as discussed in the following sections.



## Using the Web Interface

Configure subscriptions on the Subscriptions and Routing pages:

1. On the Subscriptions page, do either of the following:
  - a. In the **Subscribed Streams** section, manually add each transmitter that is to be subscribed to the receiver or load one or more existing subscription lists (\*.xiolist). The default filename of the subscription list is subscription.xiolist.

**NOTE:** Subscribed transmitters can be reordered in the list. To do so, click the transmitter that is to be reordered in the list, and then click the up arrow (↑) or the down arrow (↓) until the transmitter appears in the desired location in the list.

- b. In the **Available Streams** section of the page, click **Subscribe Checked** or **Subscribe** for the transmitters that are to be subscribed to the receiver.

### Subscriptions Page

**Subscribed Streams**

No	Device Name	Stream Details	Bit Rate (Mbps)	Stream Control
1	LeftTx	rtsp://192.18.219.248:554/live.sdp (Encrypted) 239.150.30.48 1920x1080@60Hz, Lpcm, 2Ch	950	Unsubscribe
2	NVX-35xC-076	rtsp://192.18.223.137:554/live.sdp (Encrypted) 235.0.2.56	752	Unsubscribe


Unsubscribe Checked + Add Manually Load Subscriptions Save Subscriptions

**Available Streams**

Device Name	Stream Details	Bit Rate (Mbps)	Add Stream
LeftTx	rtsp://192.18.219.248:554/live.sdp (Encrypted) TS/RTP, 239.150.30.48 1920x1080@60Hz, Lpcm, 2Ch	950	Subscribe
NVX-35xC-076	rtsp://192.18.223.137:554/live.sdp (Encrypted) TS/RTP, 235.0.2.56	752	Subscribe
DM-NVX-351-00107F8B7429	rtsp://192.18.225.38:554/live.sdp (Encrypted) TS/RTP, 235.150.6.14 1920x1080@24Hz, Lpcm, 2Ch	950	Subscribe
NVX-35xC-077	rtsp://192.19.224.169:35124/live.sdp (Encrypted) TS/RTP, 235.0.0.154	752	Subscribe
NVX-UPOE-TX	rtsp://192.19.220.17:554/live.sdp (Encrypted) TS/RTP	750	Subscribe
NVX-35xC-073	rtsp://192.18.223.220:554/live.sdp (Encrypted) TS/RTP, 239.0.2.0 3840x2160@60Hz, Lpcm, 2Ch	200	Subscribe
NVX-35xC-075	rtsp://192.18.223.246:554/live.sdp (Encrypted) TS/RTP, 235.0.2.54	752	Subscribe
DM-NVX-350-00107F8B8C34	rtsp://192.18.231.62:554/live.sdp (Encrypted) TS/RTP, 236.0.21.4 3840x2160@30Hz, Lpcm, 2Ch	750	Subscribe
DM-NVX-350-00107F9B5B44	rtsp://192.18.222.245:554/live.sdp (Encrypted) TS/RTP, 239.150.20.6 1920x1080@60Hz, Lpcm, 2Ch	950	Subscribe

2. In the **Xio-Routing** section of the Routing page, select the desired transmitter to be routed to the receiver.

### Routing Page

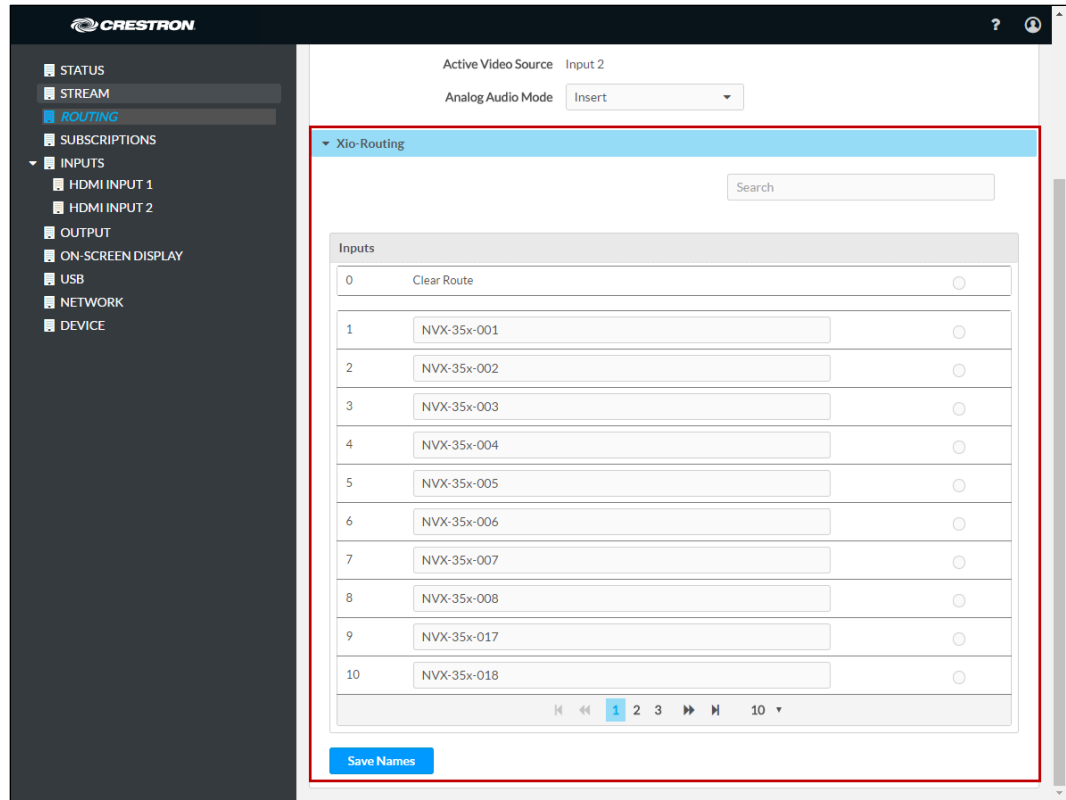

For additional information, refer to the online help of the web interface.

### Using SIMPL Windows

**NOTE:** Selection of the transmitters for subscription or selection of subscription lists can be performed using the web interface only.

Manually select a subscribed transmitter for routing in **Slot-1000: XIO Routing**. Set the **<VideoOut>** analog input join to the desired transmitter. For additional information, refer to the SIMPL Windows help file.

## Daisy Chain

A DM NVX device includes three LAN ports (two RJ-45 LAN ports and one SFP LAN port) that can be used to daisy chain multiple DM NVX devices. In a daisy chain configuration, the DM NVX devices connect directly to one another in a series. The daisy chain configuration can consist of one transmitter and up to 64 receivers or can include receivers only (maximum of 64). Only one DM NVX device in the daisy chain must connect to the LAN. All DM NVX devices in the daisy chain must use the same stream.

---

**NOTE:** A daisy chain configuration can be used for a video wall (refer to "Video Wall Processing" on page 14) and also for individual displays that are to show the same video image.

---

The following sections provide information about switching subscribed and nonsubscribed transmitters in a daisy chain configuration.

### Switching Subscribed Transmitters

To switch transmitters that are subscribed to a receiver in a daisy chain configuration, use the web interface or SIMPL Windows.

#### Using the Web Interface

To switch subscribed transmitters in a daisy chain configuration, do the following in the **Xio-Routing** section of the Routing page:

1. For each receiver in the daisy chain, clear the existing route.

---

**NOTE:** Do not proceed to step 2 until the route is cleared for all receivers in the chain.

---

2. For each receiver in the daisy chain, route the desired subscribed transmitter.

#### Using SIMPL Windows

Switch subscribed transmitters in **Slot-1000: XIO Routing**:

1. For each receiver in the daisy chain, clear the existing route by setting the **<VideoOut>** analog input join to **0**. Using SIMPL Windows, all routes for all receivers in the chain can be cleared at one time.
2. For each receiver in the daisy chain, select the desired subscribed transmitter that is to be routed by setting the **<VideoOut>** analog input join to the desired value. Using SIMPL Windows, the desired transmitter can be selected for all receivers in the chain at one time.

## Switching Nonsubscribed Transmitters

To switch nonsubscribed transmitters in a daisy chain configuration, use the web interface or SIMPL Windows.

### Using the Web Interface

To switch nonsubscribed transmitters, do the following on the Stream page:

1. For each receiver in the daisy chain, disable **Auto Initiation** and then stop the stream.

---

**NOTE:** Do not proceed to step 2 until **Auto Initiation** is disabled and the stream is stopped on all receivers in the chain.

---

2. For each receiver in the daisy chain:
  - a. Set a new stream location.
  - b. Start the stream.

For additional information, refer to the online help of the web interface.

### Using SIMPL Windows

To switch nonsubscribed transmitters, use the top-level programming slot:

1. For each receiver in the daisy chain, trigger the **<AutomaticInitiationDisabled>** digital input join to disable automatic initiation, and then trigger the **<Stop>** digital input join to stop the stream.

---

**NOTE:** Do not proceed to step 2 until **Auto Initiation** is disabled and the stream is stopped on all receivers in the chain.

---

2. For each receiver in the daisy chain:
  - a. Set the **<StreamLocation>** serial input join to a new stream location.
  - b. Trigger the **<Start>** digital input join to start the stream.

## 7.1 Surround Sound Audio

DM NVX devices support the lossless transport of 7.1 surround sound audio signals (including Dolby TrueHD, Dolby Atmos, DTS HD, and DTS:X audio signals) and uncompressed linear PCM. In receiver mode, the DM-NVX-350 and DM-NVX-350C can receive both multichannel and 2-channel downmix signals from a DM-NVX-351 or DM-NVX-351C transmitter, allowing either signal to be selected at the HDMI output while the 2-channel signal is automatically routed to the analog output.

In receiver mode, the DM-NVX-351 and DM-NVX-351C can receive the incoming multichannel surround sound signal from the network or from an HDMI input and then downmix that signal to stereo. The stereo downmix signal is automatically routed to the onboard analog output, while the HDMI output can be configured to output either stereo or multichannel audio. In transmitter mode, the DM-NVX-351 and DM-NVX-351C can distribute both stereo and multichannel signals simultaneously over the network, allowing either signal to be selected at any receiver on the network.

To configure 7.1 surround sound audio, set the desired EDID (refer to "EDID" on page 19).

## Analog Audio Input or Output

Analog audio can be configured as either an input or an output:

- As an input on a DM NVX device that functions as a transmitter, analog audio can be configured as the audio source and be inserted into a network video stream and the HDMI output. As an output on a DM NVX transmitter, analog audio can be configured to extract audio from the routed HDMI input.
- As an input on a DM NVX device that functions as a receiver, analog audio can be configured as the audio source and be inserted into the HDMI output. As an output on a DM NVX receiver, analog audio can be configured to extract audio from the routed audio/video source—either the network stream or one of the HDMI inputs.

---

**NOTE:** Analog audio output from a DM-NVX-350 or DM-NVX-350C is functional only when the device is receiving a 2-channel stereo input signal. The DM-NVX-351 and DM-NVX-351C can derive a 2-channel downmix signal from a multichannel surround sound source.

---


To configure analog audio, use the web interface or SIMPL Windows as discussed in the following sections.

## Using the Web Interface

Configure analog audio on the Routing and Output pages as applicable:


1. On the Routing page, set **Analog Audio Mode** to **Insert** or **Extract**.

### Routing Page - Analog Audio Mode Configuration

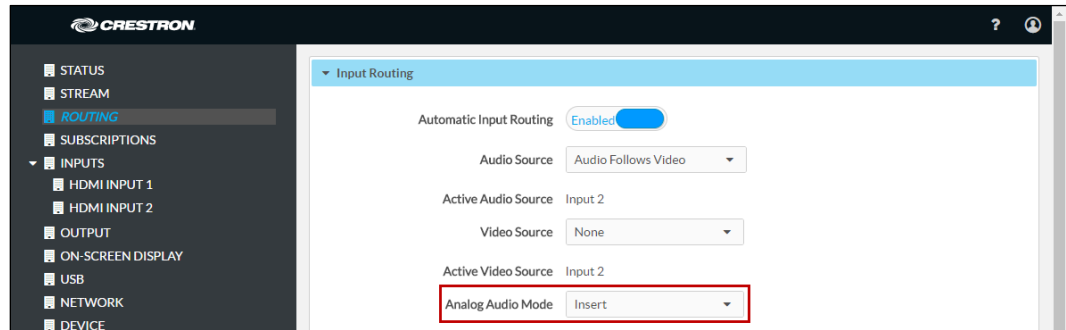


2. (Applicable only when **Audio Mode** is set to **Insert**) On the Routing page, set **Audio Source** to **Analog Audio**.

### Routing Page - Analog Audio Source Configuration

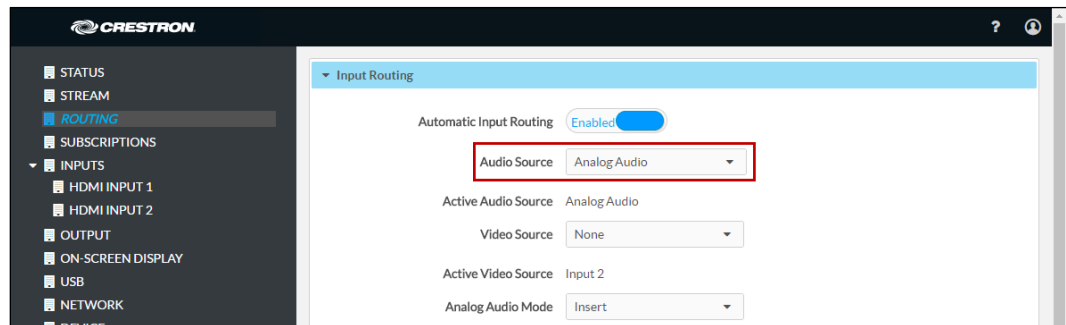

3. (Applicable only if **Analog Audio Mode** is set to **Extract**) On the Output page, set **Analog Audio Volume** to the desired volume.

### Output Page - Analog Audio Configuration

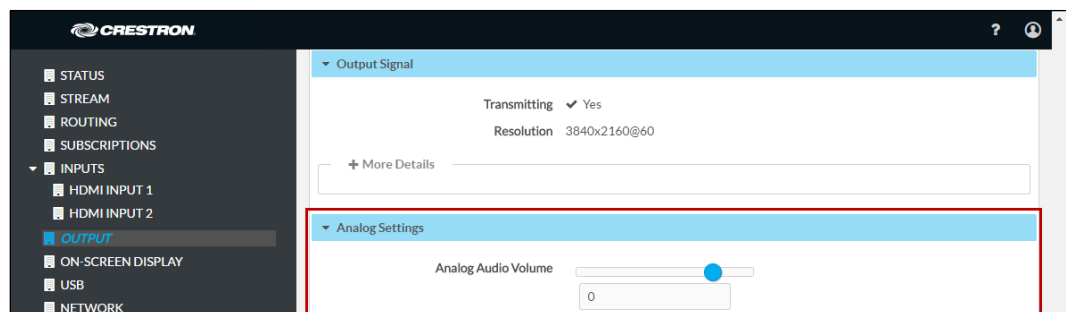

For additional information, refer to the online help of the web interface.

## Using SIMPL Windows

**NOTE:** To insert or extract analog audio, use the web interface.

Using the top-level programming slot for the DM NVX device, set the **<AudioSource>** analog input join to **Analog Audio** if analog audio is to be inserted into a network video stream or the HDMI output. If analog audio is configured as an output, set the **<AnalogAudioOutputVolume>** analog input join to the desired volume. For additional information, refer to the SIMPL Windows help file.

## Breakaway Audio

A DM NVX device can select and combine separate video and audio signals from two different inputs; however, audio from one onboard HDMI input cannot be combined with video from the other onboard HDMI input. A DM NVX receiver can combine separate video and audio signals from two different DM NVX transmitters. Combining audio from one transmitter with video from another transmitter uses the secondary 2-channel audio stream. Multichannel audio from one transmitter cannot be combined with video from another transmitter.


## Using the Web Interface

Configure breakaway audio on the Routing page. In the **Input Routing** section of the page, set **Audio Source** to one of the following available selections: **Input 1**, **Input 2**, **Analog Audio**, **Primary Stream Audio**, or **Secondary Stream Audio**. For additional information, refer to the online help of the web interface.

**NOTE:** For breakaway audio, do not set **Audio Source** to **Audio Follows Video**.

**NOTE:** For breakaway audio, do not set **Audio Source** and **Video Source** to the same HDMI input. If **Audio Source** is set to **Input 1**, do not set **Video Source** to **Input 1**. If **Audio Source** is set to **Input 2**, do not set **Video Source** to **Input 2**.

### Inputs Page - Audio Source Configuration

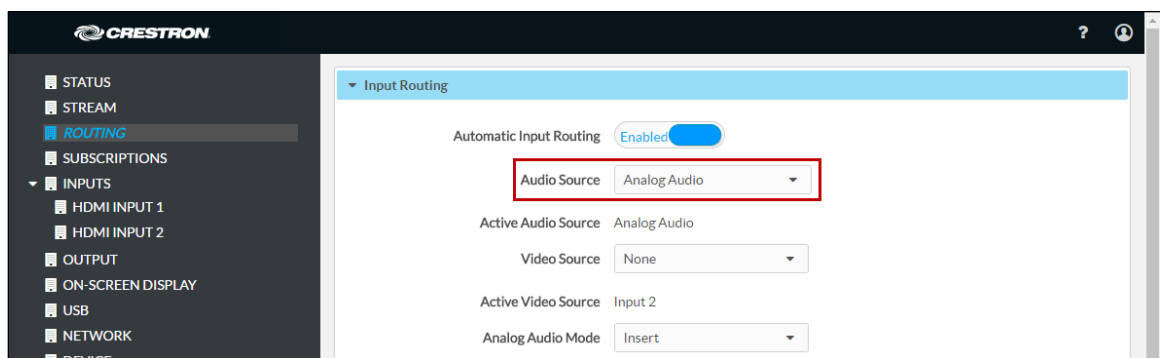

## Using SIMPL Windows

Using the top-level programming slot for the DM NVX device, set the **<AudioSource>** analog input join to one of the following available selections: **Input 1**, **Input 2**, **Analog Audio**, **Primary Stream Audio**, or **Secondary Stream Audio**. For additional information, refer to the SIMPL Windows help file.

## USB 2.0 Routing

DM NVX devices support the extension of USB signals, which can be routed from one DM NVX device to another DM NVX device via the control system. Each DM NVX device provides a USB 2.0 HOST port and a USB 2.0 DEVICE port; however, a DM NVX device can be configured to accept the connection of either a USB device or a USB host—not both. A USB mouse, keyboard, or other device can be connected to the HOST port on a DM NVX device, and a computer or other host device can be connected to the DEVICE port on another DM NVX device.

In addition to KVM (keyboard, video, mouse) switch functionality, all types of USB peripherals are supported, including whiteboards, touch screens, game controllers, cameras, mobile devices, headsets, and flash drives.

---

**NOTE:** DM NVX devices are engineered to deliver maximum compatibility with the widest possible range of USB products. Crestron does not guarantee that all USB products are compatible with DM NVX devices.

**NOTE:** When using high-traffic USB devices, bandwidth management must be considered.

---

To configure USB routing, use the web interface or SIMPL Windows as discussed in the following sections.

### Using the Web Interface

Configure USB routing on the USB routing page:

1. Determine the two DM NVX devices that are to be paired:
  - One DM NVX device functions as the local extender; that is, the DEVICE port connects to a computer or other host device.
  - The other DM NVX device functions as the remote extender; that is, the HOST port connects to a USB mouse, keyboard, or other device.
2. In the **Mode** drop-down list, select **Local** for the local extender or **Remote** for the remote extender.


The **Local Device ID** field displays the MAC address of the DM NVX device that is currently being configured.

3. Pair the local and remote extenders:
  - a. Enter the MAC address of the local extender into the **Remote Device ID** text box of the remote extender.
  - b. Enter the MAC address of the remote extender into the **Remote Device ID** text box of the local extender.
  - c. Click the **Pair** button for each DM NVX device in the pair. The **Pairing Status** indicates *Not Paired* until the Pair button is clicked for the second DM NVX device in the pair. The Pairing Status indicates *Paired* for each device when the devices are paired.



To remove pairing between two DM NVX devices, click the **UnPair** button for each device in the pair.

### USB Routing Page

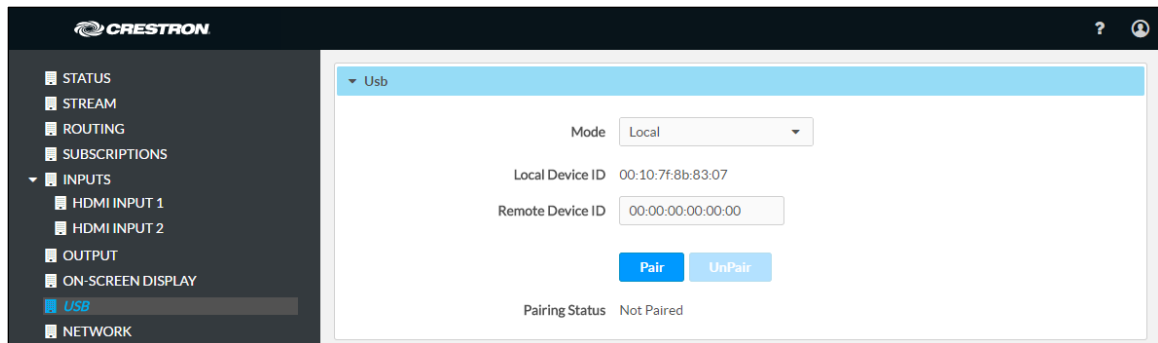

For additional information, refer to the online help of the web interface.

## Using SIMPL Windows

Using SIMPL Windows, configure USB routing in **Slot 30: USB**:

1. Determine the two DM NVX devices that are to be paired:
  - One DM NVX device functions as the local extender (LEX); that is, the DEVICE port connects to a computer or other host device.
  - The other DM NVX device functions as the remote extender (REX); that is, the HOST port connects to a USB mouse, keyboard, or other device.
2. For each of the two DM NVX devices, set the **<UsbMode>** analog input join to the appropriate mode: **0d = Local (LEX)** or **1d = Remote (REX)**. The **<UsbLocalDeviceId\_F>** serial output join reports the corresponding MAC address of each device.
3. Pair the LEX and REX devices:
  - a. Copy the MAC address (UsbLocalDeviceId) of the LEX device into the **<UsbRemoteDeviceId>** serial input join on the REX device.  
  
On the REX device, the **<UsbRemoteDeviceId\_F>** serial output join reports the MAC address of the LEX device to which the REX device is to be paired.
  - b. Copy the MAC address (UsbLocalDeviceId) of the REX device into the **<UsbRemoteDeviceId>** serial input join on the LEX device.  
  
On the LEX device, the **<UsbRemoteDeviceId\_F>** serial output join reports the MAC address of the REX device to which the LEX device is to be paired.
  - c. Trigger the **<Pair>** digital input join on both DM NVX devices (LEX and REX).

To remove pairing, trigger the **<RemovePairing>** digital input join on both DM NVX devices. For additional information about configuration of USB routing, refer to the SIMPL Windows help file.

## Device Mode Locking


Device mode locking controls whether the **SETUP** button on a DM NVX stand-alone endpoint and the front panel of a DMF-CI-8 card chassis can be used to set the operating mode of a DM NVX device as a transmitter or receiver.

**NOTE:** Device mode locking does not apply to the **Mode** setting on the Stream page of the web interface.

Configure device mode locking on the Device page. In the **Device Mode Lock** section of the page, do either of the following:

- Allow the operating mode to be changed by setting **Control Lock** to **Disabled** (default setting).
- Prevent the operating mode from being changed by setting **Control Lock** to **Enabled**.

### Device Page – Device Mode Lock Configuration

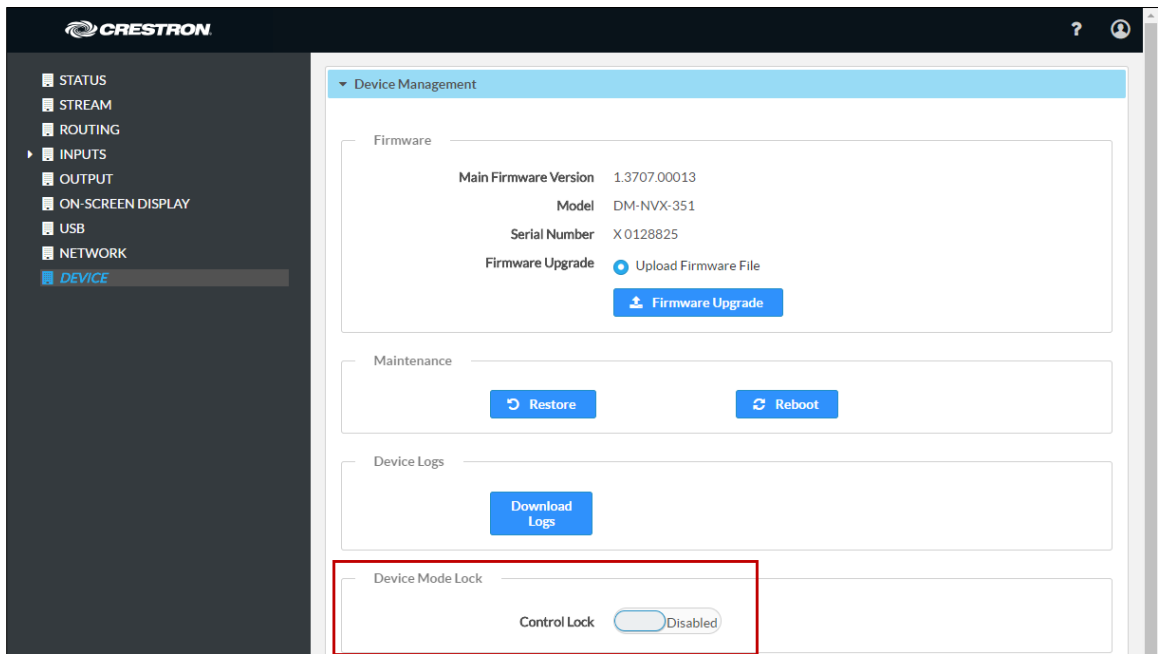


For additional information, refer to the online help of the web interface.

## Crestron XiO Cloud Service Connection

The Crestron XiO Cloud™ service allows supported Crestron devices across an enterprise to be managed and configured from one central and secure location in the cloud. Connection to the Crestron XiO Cloud service can be enabled or disabled using the web interface.

Configure the connection to the Crestron XiO Cloud service on the Device page. In the **Cloud Settings** section of the page, set **Cloud Configuration Service Connection** to **Enabled** (default setting) or **Disabled**.

### Device Page – Cloud Configuration Service Connection

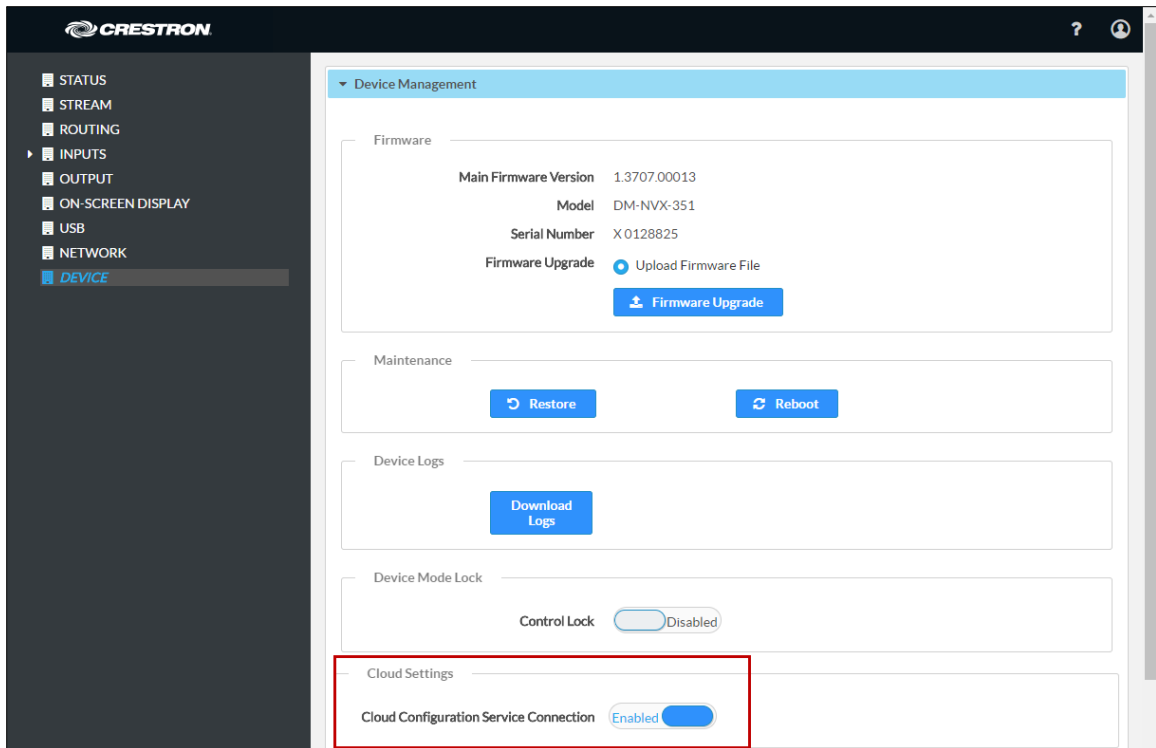

When **Cloud Configuration Service Connection** is set to **Enabled**, connection to the Crestron XiO Cloud service is allowed. For instructions about how to connect to the service, refer to the DM-NVX-350/DM-NVX-351 DO Guide (Doc. 7799) or DM-NVX-350C/DM-NVX-351C DO Guide (Doc. 7975) as appropriate. For information about using the service, refer to the Crestron XiO Cloud User Guide (Doc. 8214). The documents are available at [www.crestron.com/manuals](http://www.crestron.com/manuals).

## Automatic Firmware Update

A DM NXV device can be automatically updated with the latest firmware at scheduled intervals. To configure automatic firmware update:

1. Using the Crestron Auto Update Tool, generate a manifest file (\*.mft). The file is placed on an FTP (File Transfer Protocol) or SFTP (Secure File Transfer Protocol) server.
2. Using the DM NVX web interface, configure automatic firmware update in the **Auto Update** section of the Device page:

- a. Set **Auto Update** to **Enabled**.
- b. In the **Custom URL Path** text box, enter the path to the manifest file in the following FTP or SFTP URL format:

`ftp://username:password@host:port/path/filename`

or

`sftp://username:password@host:port/path/filename`

where:

- *username* is the username on the FTP or SFTP server
- *password* is the password for the username
- *host* is the fully qualified domain name or IP address of the FTP or SFTP server
- *port* is the connection port on the host

---

**NOTE:** The default FTP port number is 21. The default SFTP port number is 22. Entry of a port number is necessary only if the port number differs from the default value of 21 or 22.


---

- *path* is the path to the manifest file
  - *filename* consists of the name and extension (.mft) of the manifest file
- c. Set a schedule for the automatic firmware update by doing either of the following:
    - Select the desired **Day of Week** and **Time of Day** (24-hour format) values.
    - Set the **Poll Interval** by entering a value from **60** to **65535** minutes. A value of **0** disables the Poll Interval.

3. Click **Save Changes**.

Clicking **Update Now** causes the firmware to be updated at the current time; however, the schedule that is set in step 2c above remains in effect.

## Device Page – Auto Update

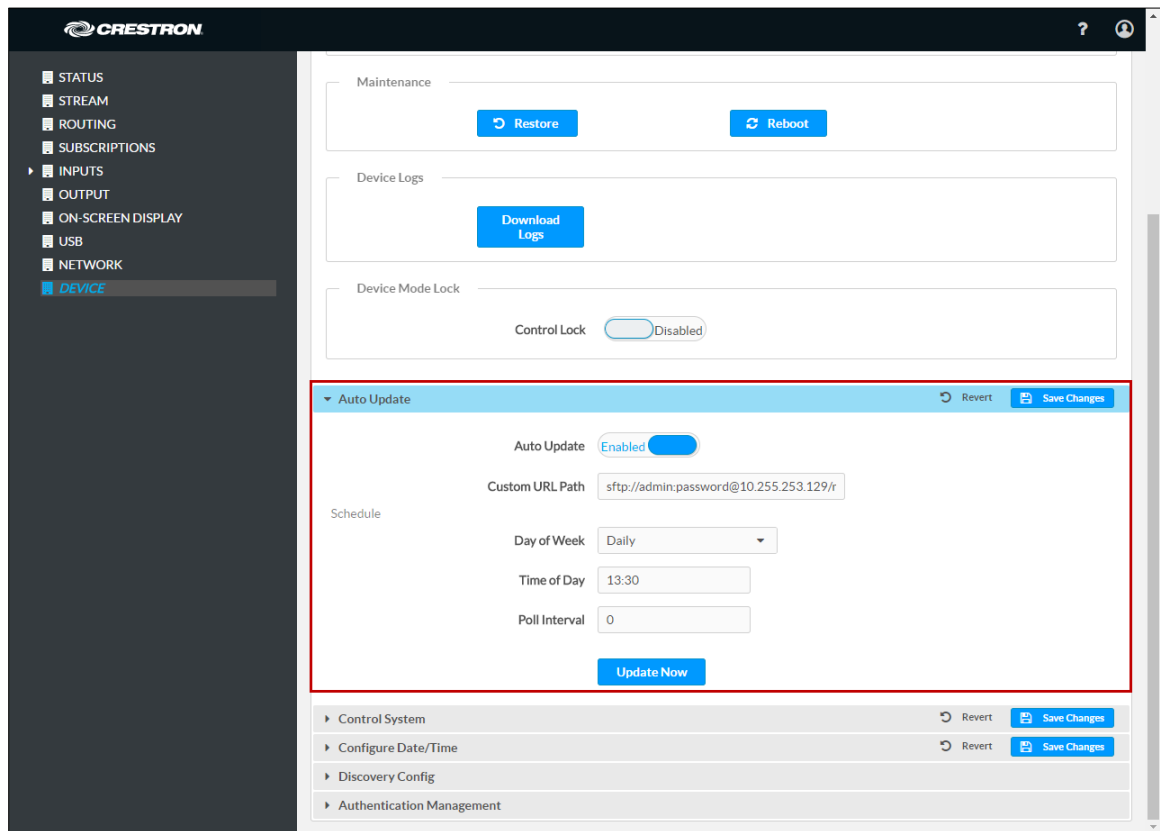

## HDCP 2.2 Compliance

The DM NVX Series is compliant with HDCP 2.2. HDCP 2.2, commonly referred to as HDCP 2, is the next generation of HDCP (High-Definition Content Protection). Note the following about HDCP 2:

- Compared to HDCP 1, HDCP 2 brings a higher level of cryptographic protection to HDMI technology.
- HDCP 2 is **not** HDMI 2. It is possible to have a system built on HDCP 1 and HDMI 2 or on HDCP 2 and HDMI 2.
- Although not all 4K content requires HDCP 2, most 4K consumer video content does require HDCP 2.
- Any product that supports HDCP 2 also supports HDCP 1.
- HDCP matters only when the source demands HDCP. If the source demands HDCP 2, then every device in the signal path must support HDCP 2.
- There are no issues related to HDCP 2 and cabling—all cables are compatible.


# IGMP Snooping

A DM NVX device sends IGMP join and leave messages.

**NOTE:** DM NVX devices support IGMPv2 and IGMPv3 only. IGMPv1 is not supported.

The IGMP snooping support version (v2 or v3) is configurable in the web interface. The **Network Interface** section of the Network page allows the desired version to be selected. The default setting is **v2**.

## Network Page - Network Interface

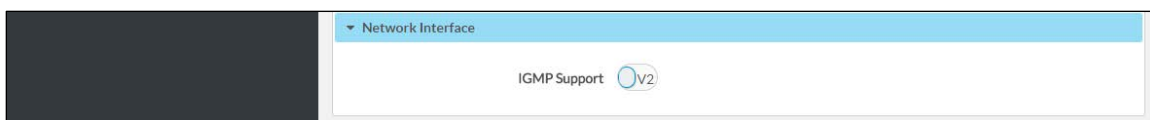

**NOTE:** When a different IGMP snooping support version is selected, the DM NVX device must be rebooted in order for the change to take effect.

The network switch port that connects to a DM NVX device must be enabled with IGMPv2 or IGMPv3 snooping to prevent the switch from flooding the multicast destination address traffic to all other connected ports. The multicast destination address that is configured for the DM NVX device must be within the range of qualified addresses. An upstream device such as a layer 3 router or switch periodically sends the IGMP General Query messages to hosts in order to maintain group membership state information. These queries can be either general or group-specific queries. The host responds to queries with IGMP membership reports. The host running IGMPv2 or IGMPv3 may also send a Leave Group message to routers or switches in order to withdraw from the group.

**NOTE:** DM NVX devices do not support random-timer and source-specific queries.

**NOTE:** As a host, a DM NVX device configured for support of IGMPv3 is compatible with a network switch (IGMP querier) that is configured for IGMPv2.

IGMP snooping switches build forwarding lists by listening for and, in some cases, intercepting IGMP messages. Although the software processing the IGMP messages may maintain state information based on the full IP group addresses, the forwarding tables are typically mapped to link layer addresses as shown in the following example.

## Example of Forwarding Table

MULTICAST MAC ADDRESS	MEMBER PORTS
01-00-5E-00-00-01	2, 7
01-00-5E-01-02-03	1, 2, 3, 7
01-00-5E-23-E2-05	1, 4

Because only the least significant 23 bits of the IP address are mapped to Ethernet addresses (RFC 1112), there is a loss of information when forwarding solely on the destination MAC address. For example, IP addresses 224.0.0.123 and 239.128.0.123 and similar IP multicast addresses all map to MAC address 01-00-5e-00-00-7b for Ethernet. As a result, IGMP snooping switches may collapse IP multicast group memberships into a single Ethernet multicast membership group.

In addition to building and maintaining lists of multicast group memberships, the snooping switch must also maintain a list of multicast routers. When multicast packets are forwarded, the packets should be forwarded not only on ports that have expressed joins using IGMP but also on ports to which multicast routers are attached.

---

**NOTE:** Do not assign reserved multicast IP addresses to a DM NVX device for streaming. For additional information, go to <https://www.iana.org/assignments/multicast-addresses/multicast-addresses.txt>.

---

**NOTE:** Multicast collision is a concern with IPv4. For example, multicast IPv4 addresses 224.8.7.6 and 229.136.7.6 translate to the same MAC address (01:00:5E:08:07:06).

---

The following items provide recommendations for configuration of a network switch for IGMP snooping:

- Set the IGMP query interval to 60 seconds or 125 seconds. The recommended setting is the default setting of the network switch.
- For good network performance, ensure that there is only one IGMP querier in the network.
- Set IGMP snooping to v2 or v3.
- Enable IGMP snooping globally as well as for each specific VLAN for DM NVX connected ports.
- Configure the network switch to drop unknown multicast packets.
- If the network switch supports IGMP fast leave, enable the configuration at the port, global, or VLAN level.
- If the network switch supports PIM snooping, enable the configuration to prevent flooding IP multicast traffic toward multicast router (mrouter) ports.

# Troubleshooting

The following table provides troubleshooting information. If further assistance is required, contact a Crestron customer service representative.

## DM NVX Encoder/Decoder Troubleshooting

PROBLEM	POSSIBLE CAUSE(S)	CORRECTIVE ACTION
4K60 4:4:4 2-channel non-HDR or 4K60 4:4:4 2-channel HDR video is intermittent.	The display device is not configured properly.	Configure the display device properly. Refer to the display device documentation for proper configuration to support 4K60 4:4:4 2-channel non-HDR or 4K60 4:4:4 2-channel HDR video.
	Crestron HDMI cable is not being used.	Use Crestron HDMI cable only.
	Crestron HDMI cable exceeds the maximum length of 20 feet (6.1 m).	Use Crestron HDMI cable that does not exceed 20 feet (6.1 m).
The display flashes to a black screen momentarily.	Switching between HDR and non-HDR content is occurring.	No action required. Flashing to a black screen may occur on certain TVs.
The video is not being displayed, but the audio can be heard.	The HDCP settings of one or more DigitalMedia™ devices in the signal path do not support the HDCP level of the source.	Ensure that the HDCP settings of all DigitalMedia devices in the signal path support the HDCP level of the source.
	The display does not support the HDCP level of the source.	Ensure that the display supports the HDCP level of the source.
	An incorrect video source is selected.	Switch the video source to the correct input.
The video is intermittent.	The HDMI or Ethernet cable connections are faulty.	Verify that all cables are connected securely.
(Applicable when the DM NVX device functions as a transmitter) A message indicating that the resolution is unsupported appears on the display.	The incorrect EDID is selected.	Select the correct EDID.
	The resolution of the input is not supported.	Change the resolution of the input.
(Applicable when DM NVX device functions as a receiver) A message indicating that the resolution is unsupported appears on the display.	The scaler is not set to a resolution that the display can support.	Change the scaler resolution setting to a resolution that the display can support.
There is no video or audio.	Cable connections are faulty.	Verify that all cables are connected securely.
	The incorrect EDID is selected for the input.	Select the EDID supported by the devices in the signal path.
	The output resolution is not supported by the display.	Change the output resolution to a resolution supported by the display.

(Continued on following page)



## DM NVX Encoder/Decoder Troubleshooting (Continued)

PROBLEM	POSSIBLE CAUSE(S)	CORRECTIVE ACTION
The analog audio input is not functioning.	The analog audio mode is set to extract audio.	Set the analog audio mode to insert audio.
	An incorrect audio source is selected.	Set the audio source to analog audio.
	Cable connections are faulty.	Verify that all cables are connected securely.
	The audio source is muted.	Verify that the audio source is not muted.
The analog audio output is not functioning.	The analog audio mode is set to insert audio.	Set the analog audio mode to extract audio.
	An incorrect audio source is selected.	Set the audio source to analog audio.
	The audio is multichannel on a DM-NVX-350 or DM-NVX-350C, which do not downmix a 2-channel signal from a multichannel surround sound source.	Switch the audio input to 2-channel audio.
The video flickers or drops when the DM NVX device is touched or when metal in the vicinity of the device is touched.	The DM NVX device is not properly grounded.	Properly ground the DM NVX device.
The DM NVX device indicates that the stream has started, but video is not being displayed.	Neither IGMPv2 nor IGMPv3 is enabled in the IGMP snooping configuration.	Ensure that IGMPv2 or IGMPv3 is enabled on the network switch.
Video is flickering or video is not displayed when multiple DM NVX devices connect to a network switch.	Neither IGMPv2 nor IGMPv3 snooping is enabled in the network switch for the associated port or VLAN.	Enable IGMPv2 or IGMPv3 snooping in the correct VLAN.
Video is flickering when multiple DM NVX transmitters connect to a network switch.	The IGMP filter is not set to drop an unknown multicast IP address.	Configure the network switch to drop the unknown multicast IP address.
A DM NVX multicast stream stopped.	The multicast address is not set properly on the DM NVX device	Ensure that the multicast address is not a duplicate of a multicast address that is set on another DM NVX device. Use a valid multicast address on the DM NVX device.
DM NVX streaming video is not seen in the receiver.	The DM NVX receiver is not configured with the correct streaming URL and multicast IP address.	Configure the DM NVX receiver using the correct streaming URL and multicast IP address.
Video stops suddenly, and the IGMP reports disappear in the network switch.	The IGMP querier is not configured correctly.	Configure the IGMP querier correctly. The recommended setting is the default setting of the network switch.

If, for any reason, the factory default settings of a DM NVX device must be restored, do one of the following:


- On the Device page of the web interface, click the **Restore** button.
- From the **Tools** menu in the Crestron Toolbox software, select **Text Console** and issue the **restore** command.
- Power cycle the device 10 times. After the tenth power cycle, wait until the device boots and then press the **SETUP** button for 5 seconds.

# Appendix: Device Discovery

A DM NVX device can be discovered on the network by using the Device Discovery Tool within the Crestron Toolbox software. To discover a DM NVX device:

1. Open the Crestron Toolbox software.
2. From the **Tools** menu, select **Device Discovery Tool**.

---

**NOTE:** You can also access the Device Discovery Tool by clicking the Device Discovery Tool button () in the Crestron Toolbox software toolbar.

**NOTE:** The security software running on the computer may send a program alert regarding the attempt of the Crestron Toolbox software to connect to the network. Allow the connection so that the Device Discovery Tool can be used.

---

The DM NVX device is discovered and is listed in the device list on the left side of the screen. The associated host name, IP address, and firmware version are also displayed.

3. In the Device Discovery Tool list, double-click the name of the DM NVX device (**DM-NVX-350**, **DM-NVX-351**, **DM-NVX-350C**, or **DM-NVX-351C**).

The Authentication dialog box opens.

4. Do the following:
  - a. Enter a user name and password. The default user name and password are both *admin*.
  - b. Click **OK**.

A configuration pane appears for the DM NVX device.

5. Click the **Web Configuration** button in the **Configuration** page that appears on the left side of the Device Discovery Tool.


---

**NOTE:** A warning indicating a security certificate problem or privacy error may appear. Ignore the warning and continue to access the web interface of the DM NVX device.

---

The Device Administration login page opens.

## Device Administration Login Page

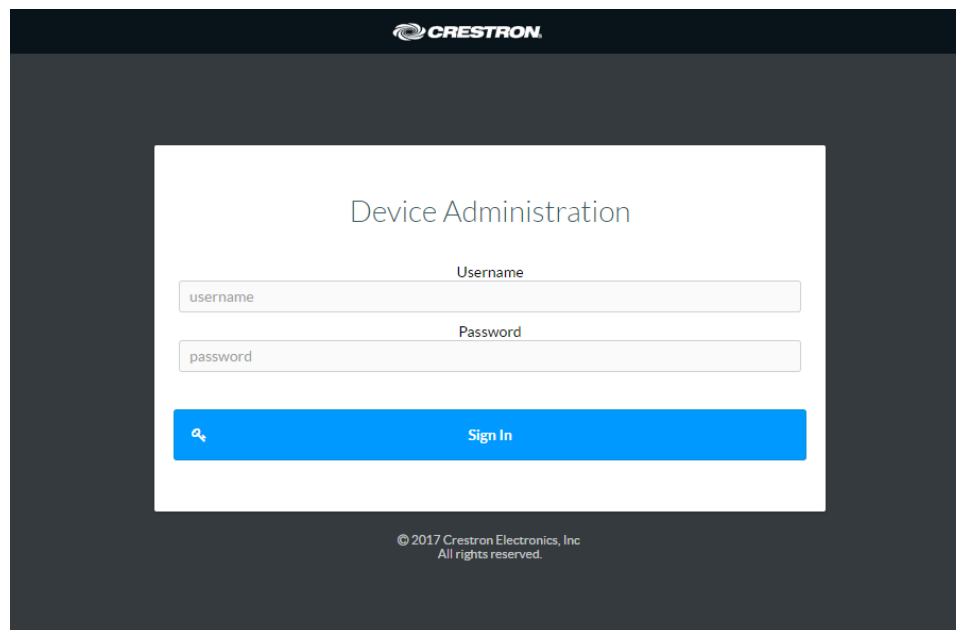

Device Administration

Username

username

Password

password

Sign In

© 2017 Crestron Electronics, Inc.  
All rights reserved.

6. Enter the user name and password. The default user name and password are both *admin*.

---

**NOTE:** The user name and password are case sensitive.

---

7. Click **Sign In**.

The Status page of the DM NVX device opens. For additional information, refer to the online help of the web interface.

This page is intentionally left blank.

