


# SC7541IM

Freestanding / Semi Built-in

# LIEBHERR

## Refrigeration and Freezing



home.liebherr.com

### SC7541IM

|                                        |                            |
|----------------------------------------|----------------------------|
| Energy consumption (kWh / y)           | 386                        |
| Estimated Yearly Energy Cost in US \$  | 54                         |
| Sound rating dB(A)                     | 36                         |
| Total capacity cu.ft. (l)              | 12.8 (363)                 |
| Refrigerator capacity cu.ft. (l)       | 7.9 (224)                  |
| BioFresh compartment cu. ft. (l)       | -                          |
| Freezer capacity cu. ft. (l)           | 4.9 (139)                  |
| Electronic control                     | Touch display              |
| Defrost type                           | Automatic                  |
| Interior light                         | Ceiling LED                |
| Number of shelves                      | 4                          |
| Number of door racks                   | 2 + VarioBox               |
| Number of EasyFresh drawers            | 1                          |
| Number of freezer drawers              | 3                          |
| Refrigerator Temperature range °F (°C) | 34 to 46°F ( 2 to 9°C)     |
| Freezer temperature range °F (°C)      | 5 to -15°F (-15 to -26°C)  |
| Internal Water Dispenser               | No                         |
| Water filter                           | No                         |
| IceMaker                               | Fixed water connection     |
| Ice cube output lbs. (kg)/24h          | 2.6 (1.2)                  |
| Ice cube stock lbs. (kg)               | 11.9 (5.4)                 |
| Door hinges                            | Left, reversible           |
| <b>Product dimensions</b>              |                            |
| in inch (H / W / D)                    | 65 3/16 / 29 7/16 / 26 5/8 |
| in cm (H / W / D)                      | 165.5 / 74.5 / 67.5        |
| <b>Cut out dimensions</b>              |                            |
| in inch (H / W / D)                    | 66 / 30 / 24               |
| in cm (H / W / D)                      | 168 / 76.2 / 60.9          |
| Net weight lbs. (kg)                   | 198.4 (90)                 |
| Voltage V / Hz                         | 115/60                     |

This model can be installed Side-by-side with SC7520

\*Energy Cost will depend on utility rates and use. Estimated energy cost based on a national average electricity cost of 14 cents per KWh.

\*\* Noise output – according to EN 60704-3



### Accessories

|                                                                |         |
|----------------------------------------------------------------|---------|
| <b>FreshAir activated carbon filter</b>                        | 9882460 |
| <b>Side By Side Kit</b>                                        | 9905353 |
| <b>60" Top Ventilation grill for Side by Side Installation</b> | 9904409 |

### Features

#### Duo Cooling

DuoCooling independent refrigeration systems provide precise temperature control and superior performance, efficiency and food preservation.

#### Easy Fresh

The guarantee of market freshness in your home. Whether it's unpackaged vegetables or fruit, Easy Fresh ensures that your food is preserved for a longer period of time.

#### Power Cooling

The fan – as powerful as it is quiet – distributes the cold air efficiently throughout the entire refrigeration compartment.

#### Ice Maker

Liebherr's automatic IceMaker produces perfect ice cubes and keeps a constant supply on hand for every occasion.

#### LED

The energy efficient LED ceiling light not only emits virtually no heat for the optimal storage of wines, but is dimmable for a pleasant ambient light within the cabinet, as well as a cool glow for the room.

#### Super Silent

Noise levels are kept to a minimum thanks to virtually silent, speed-controlled, and sound absorbing compressors.

#### Smart Steel

SmartSteel finish significantly reduces the visibility of fingerprints, is easy to clean, and is scratch resistant.


#### Smart Device Box

Want to be prepared for the future of the Smart Home? The SmartDeviceBox can be installed in just a few steps and will open up the whole world of digital possibilities to you today.

## Product Dimensions

Technical drawing of the Ektara 100 cabinet showing dimensions in inches and millimeters:

- Top width:  $(29\text{--}7/16")$  747mm
- Height:  $(65\text{--}3/16")$  1655mm
- Depth:  $(26\text{--}9/16")$  675mm
- Bottom width:  $(28\text{--}3/8")$  719,6mm
- Right side height:  $(32\text{--}5/16")$  820mm
- Right side depth:  $(0\text{--}7/16")$  11mm
- Right side width:  $(30\text{--}15/16")$  786mm
- Bottom depth:  $(1\text{--}3/8")$  35mm
- Angle:  $90^\circ$

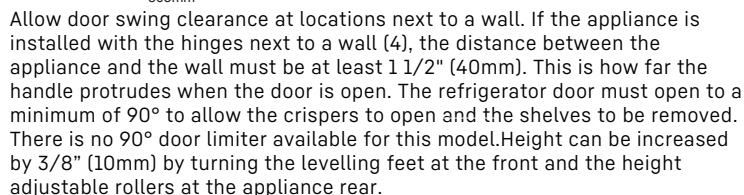

Do not install the shut-off valve for the water supply behind the appliance, to allow access to shut off without having to pull out the appliance. The water line lead out position is according to graphic (B).

Be sure to consider the possibility of having to raise some of the leveling legs in order to level the appliance when installing. If you adjust the height of the appliance – it will effectively reduce air flow. Therefore leave yourself some room for adjustment. The appliance is designed to allow proper air flow when installed up against the wall.