

FOR SERVICE TECHNICIAN'S USE ONLY

Tech Sheet

Do not discard

⚠ DANGER

Electrical Shock Hazard

Only authorized technicians should perform diagnostic voltage measurements.

After performing voltage measurements, disconnect power before servicing.

Failure to follow these instructions can result in death or electrical shock.

⚠ WARNING

Electrical Shock Hazard

Disconnect power before servicing.

Replace all parts and panels before operating.

Failure to do so can result in death or electrical shock.

Voltage Measurement Safety Information

When performing live voltage measurements, you must do the following:

- Verify the controls are in the off position so that the appliance does not start when energized.
- Allow enough space to perform the voltage measurements without obstructions.
- Keep other people a safe distance away from the appliance to prevent potential injury.
- Always use the proper testing equipment.
- After voltage measurements, always disconnect power before servicing.

PRECAUTIONS TO BE OBSERVED BEFORE AND DURING SERVICING TO AVOID POSSIBLE EXPOSURE TO EXCESSIVE MICROWAVE ENERGY

- | | |
|--|---|
| <p>a. Do not operate or allow the oven to be operated with the door open.</p> <p>b. Make the following safety checks on all ovens to be serviced before activating the magnetron or other microwave source, and make repairs as necessary:</p> <ol style="list-style-type: none"> 1. Interlock Operation 2. Proper Door Closing 3. Seal and Sealing Surfaces (Arcing, Wear and Other Damage) 4. Damage to or Loosening of Hinges and Latches 5. Evidence of Dropping or Abuse <p>c. Before turning on microwave power for any service test or inspection within the microwave generating compartments, check the magnetron, wave guide or transmission line, and cavity for proper alignment, integrity and connections.</p> | <p>d. Any defective or misadjusted components in the interlock, monitor, door seal, and microwave generation and transmission systems shall be repaired, replaced, or adjusted by procedures described in this manual before the oven is released to the owner.</p> <p>e. A microwave leakage check to verify compliance with the Federal Performance Standard should be performed on each oven prior to release to the owner.</p> <p>f. Do not attempt to operate the oven if the door glass is broken.</p> |
|--|---|



W11521895A

FOR SERVICE TECHNICIAN'S USE ONLY

FOR SERVICE TECHNICIAN'S USE ONLY

FAILURE CODE INDICATIONS

NOTE: Many of the problems listed in the chart below may be solved by power cycling: Unplug microwave oven or disconnect power. After 1 minute, plug in microwave oven or reconnect power.

Display	Likely Failure Condition	Recommended Repair Procedure
"Enter clock"	Power failure	After a power failure, "Enter clock" will be flashing. Press CANCEL to end this indication. The colon (:) will appear when in Standby mode.
F1E4	Microwave ACU failure	<ol style="list-style-type: none"> 1. Unplug microwave oven or disconnect power. 2. Replace ACU. 3. Replace all parts and panels before operating. 4. Plug in microwave oven or reconnect power.
F2E1	Stuck key failure	<ol style="list-style-type: none"> 1. Unplug microwave oven or disconnect power. 2. Replace touch panel. 3. Replace all parts and panels before operating. 4. Plug in microwave oven or reconnect power.
F4E4	Humidity sensor error	<ol style="list-style-type: none"> 1. Enter the Diagnostics mode (press CANCEL - CANCEL - START), and then press COOK TIME to display the humidity sensor reading. If display does not show "3789," continue to Step 2. Press COOK POWER to display the RH sensor NTC reading. If display does not show "026," continue to Step 2. 2. Unplug microwave oven or disconnect power. 3. Connect a new humidity sensor ACU to cable. 4. Replace all parts and panels before operating. 5. Plug in microwave oven or reconnect power. 6. Enter the Diagnostics mode (press CANCEL - CANCEL - START), then press COOK TIME, and then press COOK POWER to see if failure code reappears. 7. If the F4E4 failure code reappears, unplug microwave oven or disconnect power. 8. Replace ACU. 9. Replace all parts and panels before operating. 10. Plug in microwave oven or reconnect power. <p>NOTE: There may be a delay (approximately 1 minute, 20 seconds) before the F4E4 failure code is displayed.</p>
F8E5	Exhaust air template detection failure	<ol style="list-style-type: none"> 1. Enter the Diagnostics mode (press CANCEL - CANCEL - START), and then press OPTIONS/CLOCK to display the exhaust air temperature sensor reading. Verify the sensor temperature reading is at room temperature (typically 50°F to 90°F [10°C to 32°C]) and verify failure code. If failure code matches complaint, continue to Step 2. 2. Unplug microwave oven or disconnect power. 3. Disconnect sensor from ACU. 4. Measure sensor resistance between connector pins and confirm reading is between 9.5 kΩ and 10.5 kΩ at room temperature. If measurement is not correct, or if a short or open circuit is found, replace sensor. 5. Replace all parts and panels before operating. 6. Plug in microwave oven or reconnect power. 7. Enter the Diagnostics mode (press CANCEL - CANCEL - START), and then press OPTIONS/CLOCK to display the cavity temperature sensor reading. Verify the sensor temperature reading. If it is still not correct, replace ACU. 8. If failure does not reappear, stop.

PRIMARY, MONITOR, SECONDARY, AND DOOR INTERLOCK SWITCH CHECKOUT PROCEDURES

IMPORTANT: Before checking the interlock switches, unplug microwave oven or disconnect power. Be sure to disconnect all of the wires at the switch being tested before making any continuity readings.

NOTE: The Primary Interlock switch, Monitor Interlock switch, Secondary Interlock Switch, and Door Interlock Switch are mounted in the door lock switch cradle. All the Interlock Switches can be identified by the wire colors that are connected to the terminals of the switches. See the chart below for wire color designation.

Switch	Check By	Door Open	Door Closed
Primary Interlock	<ol style="list-style-type: none"> 1. Unplug microwave oven or disconnect power. 2. Disconnect the wires at the Primary Interlock Switch. 3. Check from the common terminal (black/brown wires) to the normally open terminal (black/white wires). 4. Reconnect wires to switch. 	-	+
Monitor Interlock	<ol style="list-style-type: none"> 1. Unplug microwave oven or disconnect power. 2. Disconnect the wires at the Monitor Interlock Switch. 3. Check from the common terminal (white wire) to the normally closed terminal (blue/white wires). 4. Reconnect wires to switch. 	+	-
Secondary Interlock	<ol style="list-style-type: none"> 1. Unplug microwave oven or disconnect power. 2. Disconnect the wires at the Secondary Interlock Switch. 3. Check from the common terminal (white/blue wires) to the normally open terminal (blue/blue wires). 4. Reconnect wires to switch. 	-	+
Door Interlock	<ol style="list-style-type: none"> 1. Unplug microwave oven or disconnect power. 2. Disconnect the wires at the Door Interlock Switch. 3. Check from the common terminal (blue wire) to the normally closed terminal (orange wire). 4. Reconnect wires to switch. 	+	-

(+) Continuity (-) No Continuity


2

FOR SERVICE TECHNICIAN'S USE ONLY


NOTE: These diagrams are not intended to show a complete circuit; they represent the position of switches during "DOOR OPEN" or "DOOR CLOSED" (continuity checks only).

NOTE: Interlock, Monitor switches and Door interlock switch cannot be adjusted and all these switches should be replaced if any one of them is found to be defective. After replacing interlock/monitor switches, reconnect wires to switch and check for continuity. Safety interlocks and monitor switches will actuate within 2 mm.

Door Closed



Door Open

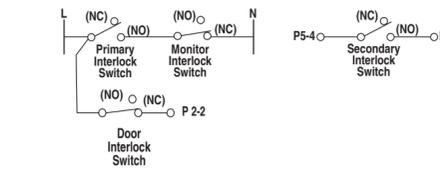

NOT HEATING TROUBLESHOOTING INSTRUCTION

IMPORTANT: High-voltage is present at the magnetron and high-voltage capacitor terminals. Avoid direct contact when power is connected to these components to avoid serious injury or possible death. Always be sure that the high-voltage capacitor is discharged before accessing any of these components.

For a no-heat condition, refer to the following step-by-step instructions:

1. Unplug microwave oven or disconnect power.
2. Discharge the high-voltage capacitor.
3. Disconnect the high-voltage transformer primary windings.
4. Attach the voltmeter leads to the high-voltage transformer primary input wires.
5. Plug in microwave oven or reconnect power.
6. Close door and program the microwave oven to operate for 30 seconds.
7. Press START.
8. Check the input voltage at the high-voltage transformer primary input wires. If the voltage is not close to the rating voltage 120 +/-15 VAC, unplug microwave oven or disconnect power. Check the circuitry as follows:
 - Measure resistance of the fuse, microswitches and thermostats. Replace any failed components. (Refer to the wiring diagram.)
 - Check for loose terminals. (Refer to the wiring diagram.) Check all of the terminals on the main route from the power supply to the high-voltage transformer.
9. Check for loose or failed connectors on the ACU (P1, P2, P4). If these check out OK, plug in microwave oven or reconnect power.
10. Check for ACU failure. Refer to the "ACU Pin Voltage Matrix" section.
11. If the input voltage at the high-voltage transformer primary input wires is close to the rating voltage 120 +/-15 VAC, unplug microwave oven or disconnect power.
12. Check the power supply components. Refer to the "Component Tests" section.
 - High-voltage transformer
 - High-voltage capacitor
 - High-voltage diode
13. If the power supply components check out OK, check the connection between the magnetron and the high-voltage transformer.
14. If all of the components check out OK, replace the magnetron.
15. Reconnect the high-voltage transformer primary windings.

ACU PIN VOLTAGE MATRIX

Check for proper voltage by completing the following steps:

1. Unplug microwave oven or disconnect power.
2. Connect voltage measurement equipment to the terminals listed below. (P1-3 and P2-3 are neutral.)
3. Plug in microwave oven or reconnect power, and confirm voltage reading.
4. Unplug microwave oven or disconnect power.

NOTE: For 50 V and over, the tolerance is +/-15 V. For 0 V, the tolerance is +/-3 V.

Abbreviations

HL – Hood Light N – Neutral CL – Cavity Light HF – Hood Fan L – Line Voltage TT – Turntable Motor NFS – Neutral for Switch

NOTE: When checking voltage readings on ACU, connect the grounding test lead of voltmeter to P1-3, P2-1. Use the positive test lead to probe connectors designated below.


3

FOR SERVICE TECHNICIAN'S USE ONLY

MW Oven Plugged In—Sitting Idle—ACV Readings

Pin Name	Wire Color	MW Oven Plugged In—Sitting Idle—ACV Readings														MW Oven Running — ACV Readings	
		Power On, Door Closed	Power On, Door Open	Hood Fan Motor—High	Hood Fan Motor—High, Door Open	Hood Fan Motor—Med-High	Hood Fan Motor—Med-High, Door Open	Hood Fan Motor—Medium	Hood Fan Motor—Medium, Door Open	Hood Fan Motor—Low	Hood Fan Motor—Low, Door Open	Hood Light—High	Hood Light—High, Door Open	Hood Light—Low	Hood Light—Low, Door Open		MW Oven Start
P1-1 (L)	Brown	120	120	120	120	120	120	120	120	120	120	120	120	120	120	120	120
P1-3 (N)	White	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
P2-3 (NFS)	Blue	0	120	0	120	0	120	0	120	0	120	0	120	0	120	0	120
P2-2 (Door)	Orange	0	120	0	120	0	120	0	120	0	120	0	120	0	120	0	49
P2-1 (N)	Green	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
P4-4 (HF-Lo)	White	0	120	0	120	0	120	0	120	0	120	0	120	0	120	0	120
P4-5 (TTM)	Black	0	120	0	120	0	120	0	120	0	120	0	120	0	120	0	120
P4-1 (HL)	Red	0	0	0	0	0	0	0	0	0	120	120	67	67			2.4
P4-2 (HF-R)	Gray	0	0	120	120	120	120	58	58	77	77	0	0	0	0	0	3.6
P4-3 (HF-Hi)	Black	0	0	120	120	68	68	58	58	39	39	0	0	0	0	0	3.7
P4-6 (CL)	Green	0	0	151	151	120	120	55	55	77	77	0	0	0	0	0	3.7

CONNECTORS ON ACU

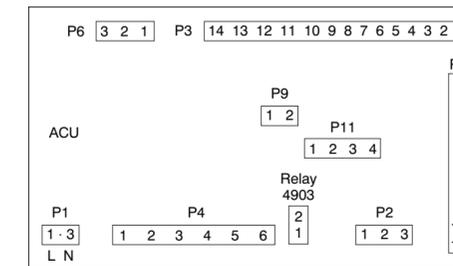

NOTE: There are purposely empty terminals between each of the numbered terminals on P1 connector.

TOUCH PANEL

Touch Panel and ACU Test

The microwave hood combination is provided with a self-diagnostic routine that can be accessed through the touch keypad.

To initiate this routine:

1. Plug in microwave oven or reconnect power, and press CANCEL to standby (":").
2. Close door, then press CANCEL - CANCEL - START within 3 seconds.

3. All display segments will be lit to indicate the Test mode has been entered.
- NOTE:** If CANCEL is pressed during this diagnostic routine, you will exit the Test mode.

4


FOR SERVICE TECHNICIAN'S USE ONLY

Key Tables for Test Mode

Key Name	Function	Display	Buzzer
Popcorn	-	key 30	1 beep
Potato or Baked Potato	-	key 31	1 beep
Vegetable	-	key 2E	1 beep
Frozen Entrée	-	key 33	1 beep
Steam Simmer or Steam Cook	-	key 2D	1 beep
Warm Hold	-	key 06	1 beep
Reheat	-	key 24	1 beep
Defrost	-	key 25	1 beep
Soften/Melt	-	key 29	1 beep
Cook Time	Humidity sensor check	Value between 2000 and 6000	1 beep
Cook Power	RH NTC sensor check	Value between 10 and 40	1 beep
Cook		key 07	1 beep
Timer Set/Off	-	key 05	1 beep
Options/Clock	HF NTC Thermistor	XXX	1 beep
Start or [▶]	Software/Gee version check*	xx.xx.xx	1 beep
Add 30 Sec or +30Sec		key 20	1 beep
Dinner Plate	-	key 32	1 beep
Beverage	-	key 34	1 beep
Pizza	-	key 35	1 beep

* Continuously pressing START or [▶] will respectively display SW Version and Gee Version for each press.

PARTS LAYOUT (NOT TO SCALE)

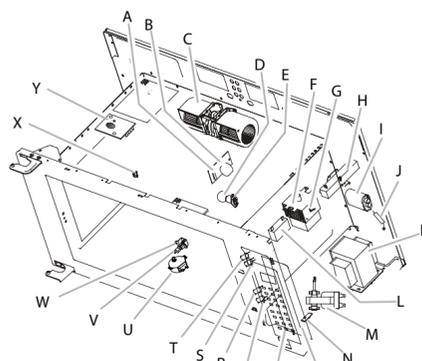

- | | |
|--|---|
| A. Line fuse (20 A) | M. Cooling fan motor |
| B. AC line filter board | N. HF NTC thermistor |
| C. Hood fan motor assembly | O. ACU |
| D. Cavity light | P. Touch panel |
| E. Cavity light holder | Q. Secondary interlock switch |
| F. Magnetron | R. Door interlock switch |
| G. Magnetron thermostat—opens at 257°F (125°C), closes at 185°F (85°C) | S. Monitor interlock switch |
| H. Power resistor | T. Primary interlock switch |
| I. H.V. capacitor | U. Turntable motor |
| J. H.V. diode | V. Hood (cooktop) light |
| K. H.V. transformer | W. Hood (cooktop) light holder |
| L. Motor capacitor | X. Cavity thermostat—opens at 257°F (125°C), non-resettable |
| | Y. Humidity sensor ACU |

FOR SERVICE TECHNICIAN'S USE ONLY

POWER OUTPUT MEASUREMENT

The power output of the magnetron can be measured using the following "Voltage Measurement" and "Output Test" sections. Before you perform the test:

- Make sure that the oven cavity is cool and clean.
- Check the line voltage at the wall outlet while microwave oven is operating. See the "Voltage Measurement at Power Source" section.


Tools Needed

- 2-cup measuring cup
- Thermometer
- Voltmeter/ohmmeter

Voltage Measurement at Power Source

- Fill the measuring cup with 2 cups (500 mL) of tap water.
- Place in the center of the microwave oven cavity.
- Operate the microwave oven on High speed for 1 minute.
- While the microwave oven is operating, measure the line voltage at the power source. See "Measure Voltage" illustration.
- Verify the voltage is constant during microwave oven operation. If voltage drops below 108V, contact a qualified electrician to check your electrical supply.
- Make note of the voltage while the microwave oven is running and proceed to the output test.

Measure Voltage

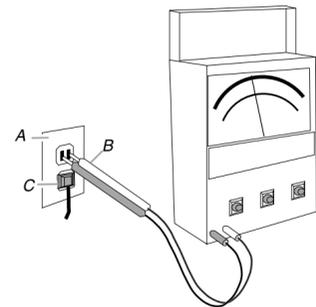

- A. House power supply wall outlet
B. Voltmeter/Ohmmeter test leads
C. Microwave oven plug

COMPONENT TESTS

- IMPORTANT:**
- Unplug microwave oven or disconnect power.
 - Discharge the high-voltage capacitor and remove the lead wires from the primary winding of the high-voltage transformer before conducting any of the following tests.
 - Remove the lead wires from the related component before conducting any of the following tests.
 - All operational checks using microwave energy must be done with the microwave oven loaded with a minimum of 8 oz (250 mL) of water in a microwave-safe container.

- Conduct a microwave energy test after performing any tests or repairs to the microwave oven.
- Check that all wire leads are in the correct positions before operating the microwave oven.
- Grasp wire connectors when removing the wire leads from microwave oven parts.
- All testing must be done with an ohmmeter having a sensitivity of 20,000 ohms per volt DC or greater and powered by at least a 9 V battery.

FOR SERVICE TECHNICIAN'S USE ONLY

Components

Test/Results

H.V. Transformer

- Unplug microwave oven or disconnect power.
- Remove wire leads.
- Measure resistance:
 - Filament (orange/red wires) Primary
 - Secondary (white wire - ground to transformer case)

Magnetron

- Unplug microwave oven or disconnect power.
- Remove wire leads.
- Measure resistance:
 - Filament terminal: Normal: Less than 1 Ω
 - Filament to chassis: Normal: Infinite

H.V. Capacitor

- Unplug microwave oven or disconnect power.
- Remove wire leads.
- Measure resistance:
 - Terminal to terminal: Normal: Momentarily indicates several ohms and then gradually returns to infinite.
 - Terminal to case: Normal: Infinite

H.V. Diode

- NOTE:** Some inexpensive meters may indicate infinite resistance in both directions.
- Unplug microwave oven or disconnect power.
 - Measure resistance:
 - Forward: Normal: Continuity
 - Reverse: Normal: Infinite

Turntable Motor

- Unplug microwave oven or disconnect power.
- Remove wire leads.
- Measure resistance:
 - Normal: 2.4 kΩ to 3.2 kΩ (approximate)

Motor Capacitor

- Unplug microwave oven or disconnect power.
- Remove wire leads.
- Measure motor capacitor:
 - Normal: Momentarily 0 Ω, then goes to infinite

Humidity Sensor ACU

- Unplug microwave oven or disconnect power.
- Remove the 4-pin connector from the cable.
- Measure resistance across pins 1 and 2.
 - Normal: 10 kΩ +/-5% at 77°F (25°C)
- Measure capacity value across pins 3 and 4.
 - Normal: 180 pF +/-5% at 55% RH

Hood Exhaust Fan Motor

- Unplug microwave oven or disconnect power.
- Remove wire leads.
- Measure resistance:
 - High Speed—Normal: Red (RD) and Blue (BU) wires: 70 Ω to 100 Ω (approximate); Blue (BU) and Black (BK) wires: 30 Ω to 60 Ω (approximate)
 - Low Speed—Normal: Red (RD) and Blue (BU) wires: 70 Ω to 100 Ω (approximate); Blue (BU) and White (WH) wires: 50 Ω to 80 Ω (approximate)

HF NTC Thermistor

- If "NTC SHORT, CALL FOR SERVICE" or "NTC OPEN, CALL FOR SERVICE" scrolls on display, unplug microwave oven or disconnect power.
- Measure resistance:
 - Normal: 10 kΩ +/-5% at 77°F (25°C)

Power Resistor

- Unplug microwave oven or disconnect power.
- Remove wire leads.
- Measure resistance:
 - Normal: 65 Ω/65 W

FOR SERVICE TECHNICIAN'S USE ONLY

Components

Test/Results

Cooling Fan Motor

- Unplug microwave oven or disconnect power.
- Remove wire leads.
- Measure resistance:
 - Normal: 40 Ω to 60 Ω (approximate)

AC Line Filter Board

- Unplug microwave oven or disconnect power.
- Remove wire leads.
- Measure resistance:
 - Normal: L-IN to L-OUT (coil): Less than 1 Ω; N-IN to N-OUT (coil): Less than 1 Ω

Thermostats


Cavity Thermostat

Magnetron Thermostat

- Unplug microwave oven or disconnect power.
- Remove wire leads.
- Measure continuity:
 - Normal: Continuity

NOTE: Refer to "Parts Layout" for opening and closing temperatures.

SCHEMATIC DIAGRAM

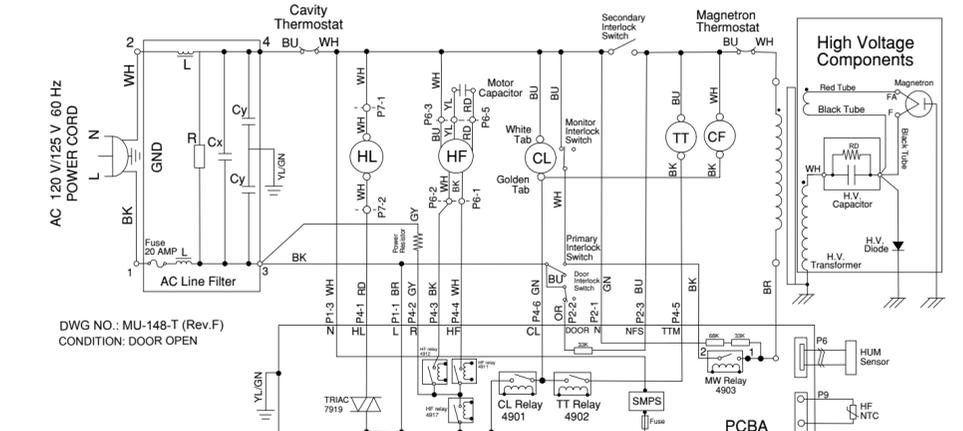

- SYMBOL NOTES:
- | | | | | | | | | | | | |
|------|----------------|----|--------------------------|----|-------------------|----|-----------|----|-----------|----|-----------|
| BK | WIRE COLOR | HL | HOOD LAMP (COOKTOP LAMP) | CF | COOLING FAN MOTOR | BU | BU:BLUE | WH | WH:WHITE | BR | BR: BROWN |
| P6-1 | PIN NO.-1 | CL | CAVITY LAMP | TT | TURNTABLE MOTOR | GN | GN:GREEN | OR | OR:ORANGE | RD | RD:RED |
| | CONNECTOR NAME | | | | | YL | YL:YELLOW | GY | GY:GRAY | | |
- P2/P3/P4/P5/P6/P7-CONNECTORS
BK:BLACK WH:WHITE BR:BROWN
BU:BLUE GN:GREEN OR:ORANGE
RD:RED YL:YELLOW GY:GRAY