


## DS2 Door Station

### Getting Started Guide

The main module includes the following elements and connectors accessible to the installer:

- LAN connector (optional PoE 802.1af) for LAN connection
- IN1 terminals for input in passive/active mode (-30V to +30VDC)  
OFF = Open OR  $U_{IN} > 1.5V$   
ON = Closed contact OR  $U_{IN} < 1.5V$
- OUT1 active output: 8 up to 12VDC depending on power supply (PoE: 10V; adapter: power supply voltage minus 2V), max 400mA
- RELAY1 terminals 30V/1A AC/DC NO/NC contact
- External 12V/2A DC power supply terminals
- Grounding terminal
- RESET/FACTORY RESET button
- LED indicators (red/green/yellow)
- LINE OUT connector (1VRMS)
- MIC connector for microphone connection
- Bus connector

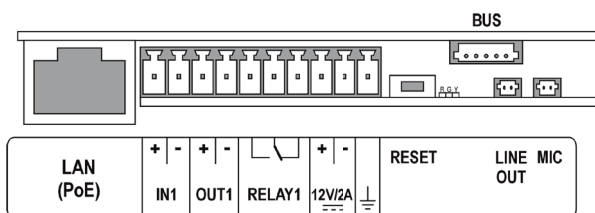

#### IP address:

- Default setting is DHCP ON.
- To switch DHCP ON/OFF, press the dial button 15x within 30 seconds from bootup.
- To make the door station tell the IP address, press the dial button 5x within 30 seconds from bootup.
- Press the dial button 4x within three seconds to identify the door station to Control4.

## Keypad module

The Keypad module is included in part numbers C4-DS2SMKP-SV and C4-DS2FMKP-SV and provides numerical input to the system.

- To use the keypad for access control, type the number, then press the blue key.
- To use the keypad for dialing a particular user, type the number, then press the green telephone handset key.
- The module contains two bus connectors. These two connectors are fully equivalent, and either one can be used for connecting to the main module.
- The module package includes a 8.5inch (220 mm) long interconnecting cable.

See [ctrl4.co/ds2](http://ctrl4.co/ds2) for more information.



[ctrl4.co/ds2](http://ctrl4.co/ds2)

## Declarations of Conformity

Hereby we, Control4 Corporation, declare that the product Control4 DS2 Door Station is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

This Class B digital apparatus complies with Canadian ICES-003.

This product has been tested and found to comply with the limits of IEC 60950-1:2005 (Second Edition) and has received MET mark as the NRTL's certification mark for the North American Product Safety Requirements.

For the full wording of these Declarations, see **[www.control4.com](http://www.control4.com)**.

### Control4 Corporation

11734 South Election Road  
Salt Lake City, UT 84020  
USA

2183v4