


AudioControl®

Making Good Sound Great™

THE POWER TO CONNECT...

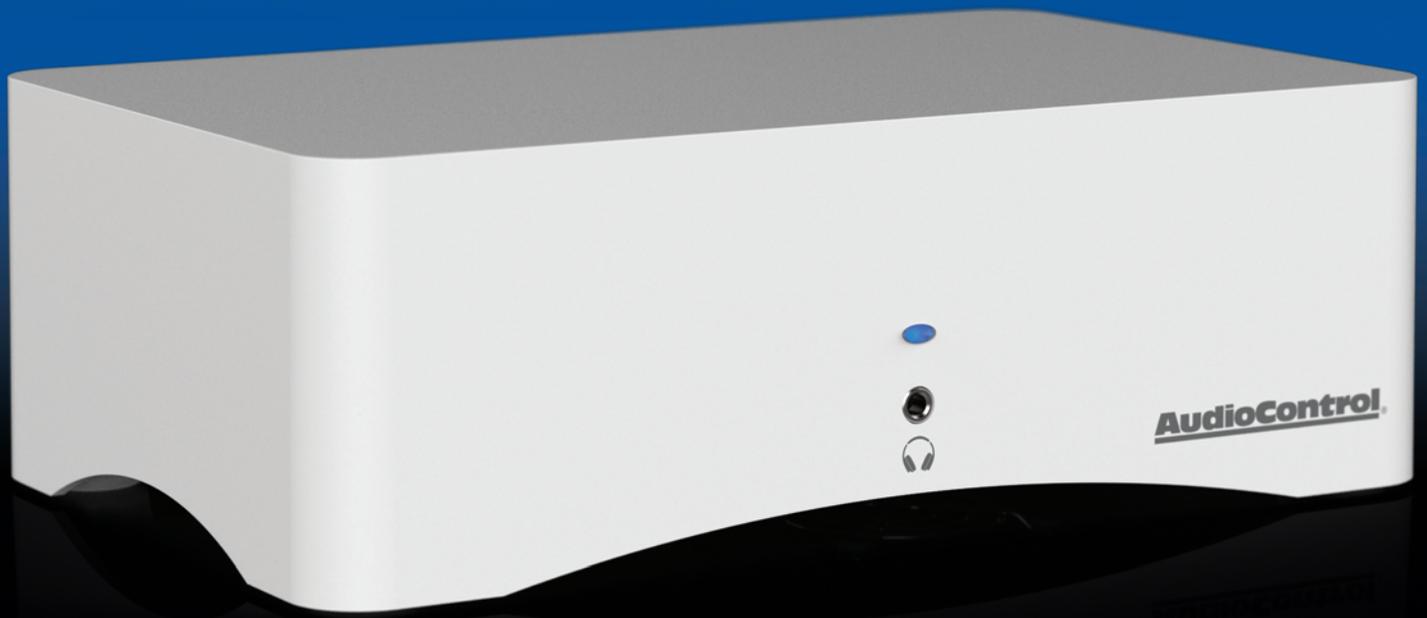

Rialto⁴⁰⁰™

HIGH POWER AUDIOPHILE AMPLIFIER & DAC
WITH DEDICATED HIGH-SPEED SWITCHING PRIORITY INPUT



MADE IN USA | 100 WATTS PER CHANNEL AT 8 OHMS | 200 WATTS PER CHANNEL AT 4 OHMS
INSTANTANEOUS INPUT SWITCHING WITH DEDICATED PRIORITY INPUT | DIGITAL & ANALOG INPUTS
HIGH PERFORMANCE WOLFSON DAC | ACCUBASS®

HOME AUDIO

HIGH POWER AUDIOPHILE AMPLIFIER WITH DAC

AudioControl's Rialto 400 is a breakthrough, compact high power audiophile amplifier and high performance digital to analog converter (DAC) in one. Delivering 100 watts stereo (8 ohms), 200 watts stereo (4 ohms), and 400 watts bridged mono, the Rialto 400 easily powers the most demanding speakers, large and small, and dramatically improves the audio quality and performance of any local audio zone.

Equipped with digital, analog, and speaker level inputs, plus a dedicated priority input, The Rialto 400 is the perfect companion to digital audio streaming sources like SONOS™, and allows for seamless integration with voice-activated devices like Amazon Echo™ and Google Home™ via the priority input.

A dedicated 3.5 mm **priority input** jack that allows for fast, smooth and silent smart-switching, capable of overriding both digital and analog inputs when it senses signal. Query using voice commands on Amazon Echo™ or Google Home™ and the Rialto 400 pauses the active input, allowing for the response from the voice-activated device, then immediately switches back to the active input.

The AudioControl Rialto 400 provides superb performance along with smart-switching capability, making it the ultimate zone amplifier for integrators.

NUMBER OF CHANNELS	2
POWER RATING (ALL CHANNELS DRIVEN)	100 WATTS @ 8 OHMS 200 WATTS @ 4 OHMS
MINIMUM SPEAKER LOAD	4 OHMS
DIGITAL INPUTS	1X COAX SPDIF 75 OHM 1X OPTICAL TOSLINK
ANALOG INPUTS	1X STEREO RCA 1X STEREO SPEAKER LEVEL 1X STEREO 3.5 MM (PRIORITY INPUT)
MINIMUM VOLTAGE TO DRIVE TO FULL POWER	RCA INPUTS - .775 mV
SIGNAL TO NOISE RATIO	>95 dB
TOTAL HARMONIC DISTORTION	0.09%
LINE VOLTAGE	100 - 120 VAC / 200-240 VAC SWITCHABLE
POWER CONSUMPTION	TYPICAL LISTENING - 40 WATTS MAXIMUM - 520 WATTS
BASS ADJUSTMENT	ACCUBASS®
WEIGHT	4.9 POUNDS
FINISH OPTIONS	WHITE, ESPRESSO BLACK
DIMENSIONS	8.5"W x 5.4"D x 2.9"H
COUNTRY OF ORIGIN	USA
LIMITED WARRANTY	5 YEAR

