


ASSEMBLY INSTRUCTIONS COASTER FINE FURNITURE




Fine Furniture for every stage of life

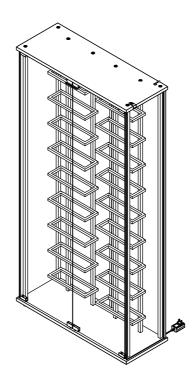


COASTERFURNITURE.COM

REVISION 0 : 03/19/2024

PAGE 1 OF 12

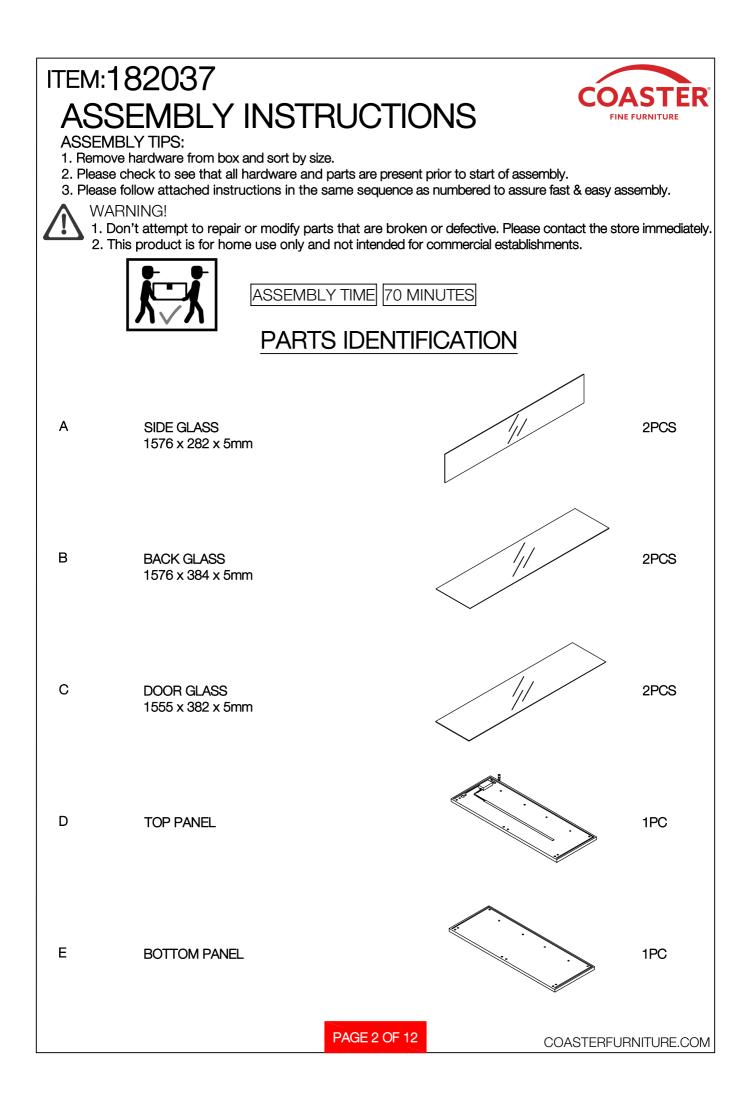


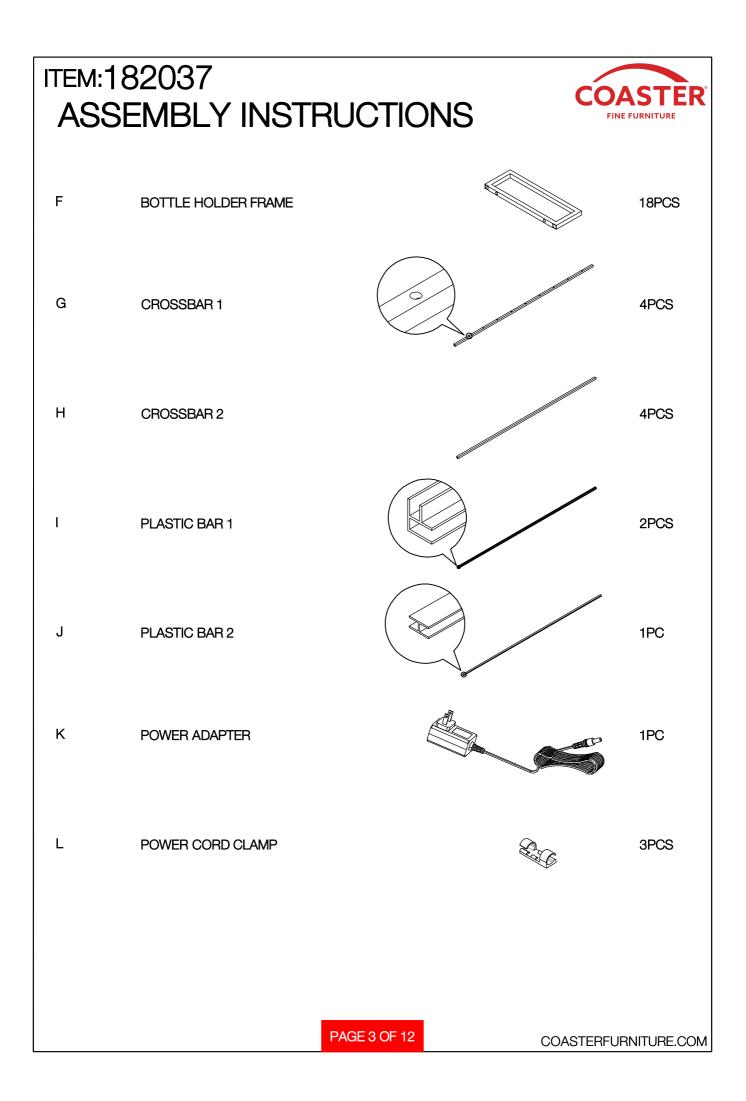



ITEM:182037 ASSEMBLY INSTRUCTIONS						COASTER [®] FINE FURNITURE	
Z HARDWARE IDENTIFICATION							
1	SHORT BOLT (1/4" x 25mm SR)	() Junio	36PCS	9	HINGE 2	e e	2PCS
2	LONG BOLT (1/4" x 42mm SR)		16PCS	10 N	IETAL WITH ADHESIVE		4PCS
3	WASHER (1/4" SR)	0	16PCS	11	SMALL BOLT (Ø7 x 6mm)	C e	8PCS
4	CAP (13 x 13mm SR)	Ĵ	36PCS	12	HINGE INSERT	9	4PCS
5	SCREW (7# x 22mm SR)	(C) Damandan	4PCS	13	HANDLE		2PCS
6	PLASTIC FEET	Ø	4PCS	14	METAL CONTACT		2PCS
7	PLASTIC MAGNET	Ø	4PCS	15	ADHESIVE	\checkmark	4PCS
8	HINGE 1	and the second s	2PCS	16	ALLEN WRENCH (4mm)		1PC


PAGE 4 OF 12


COASTERFURNITURE.COM

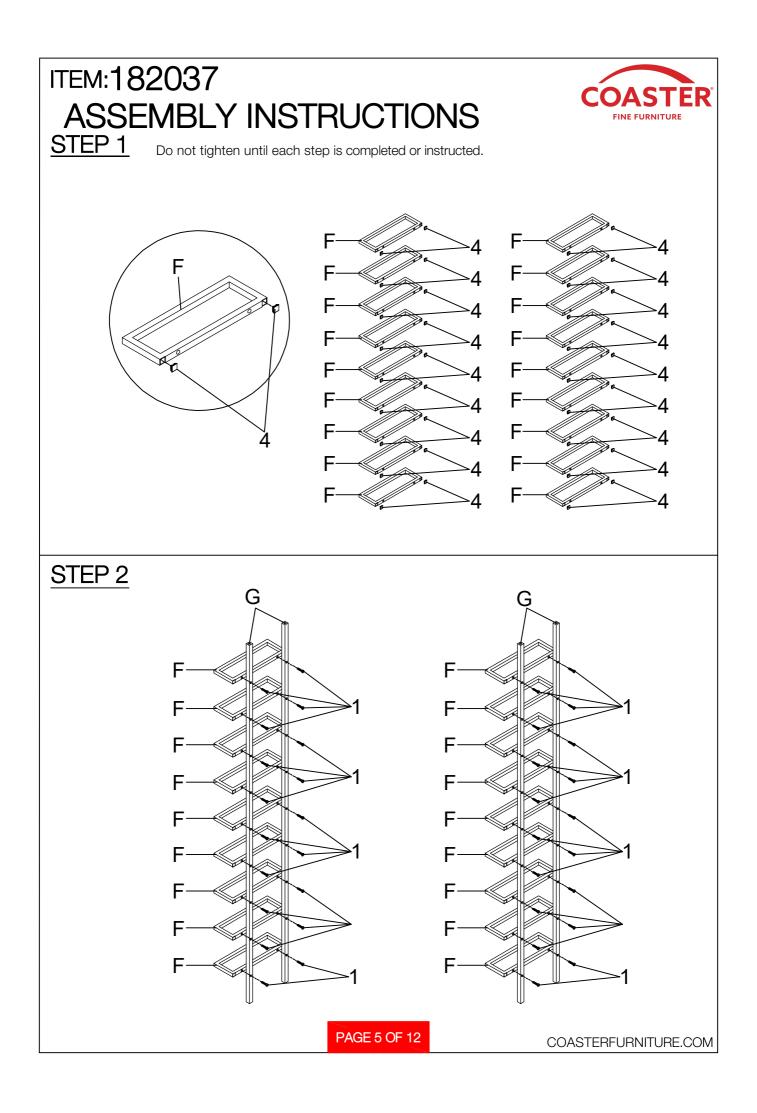


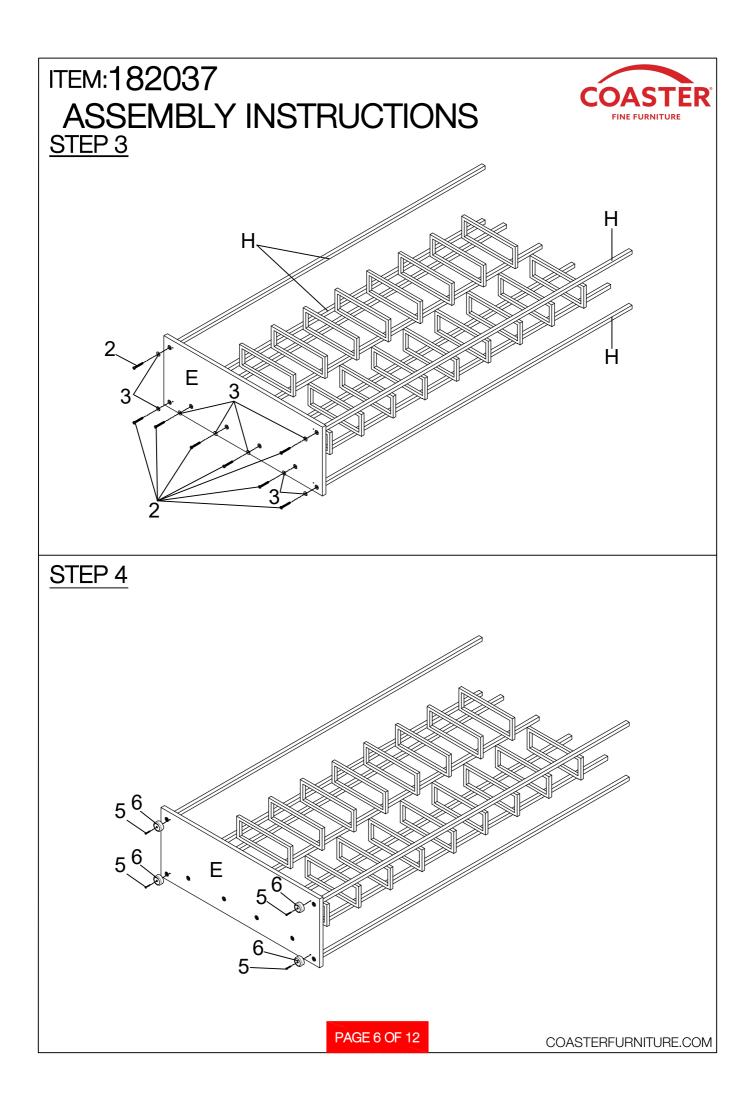


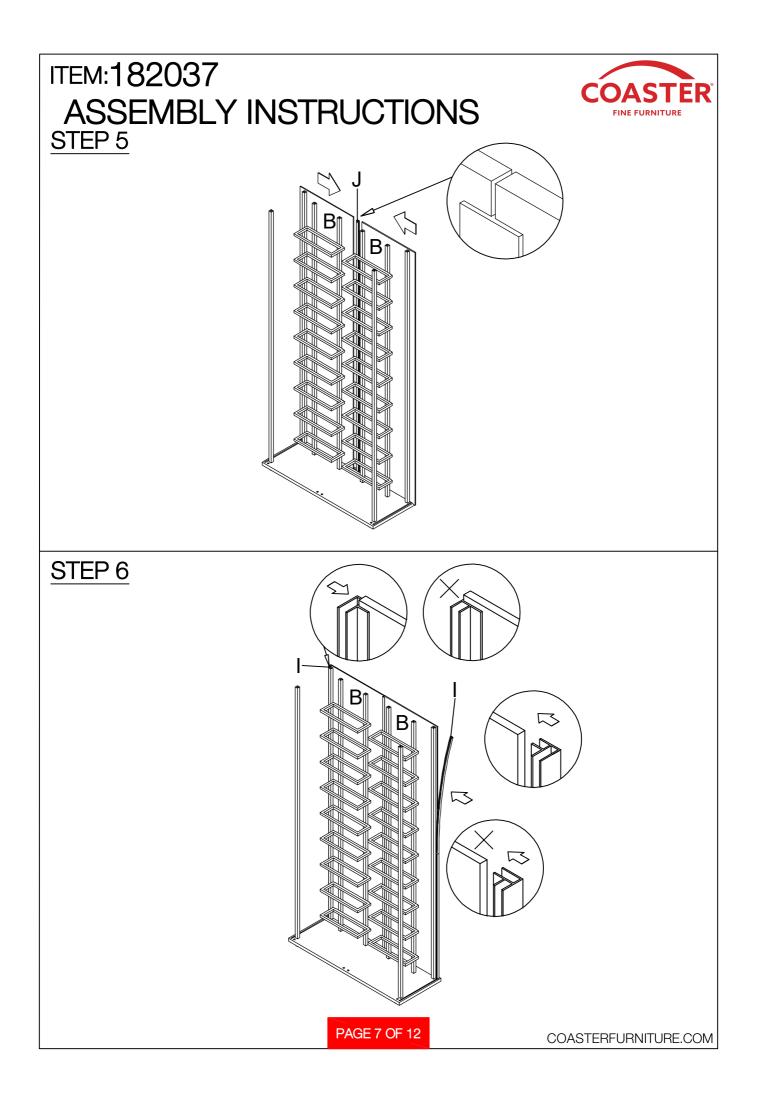

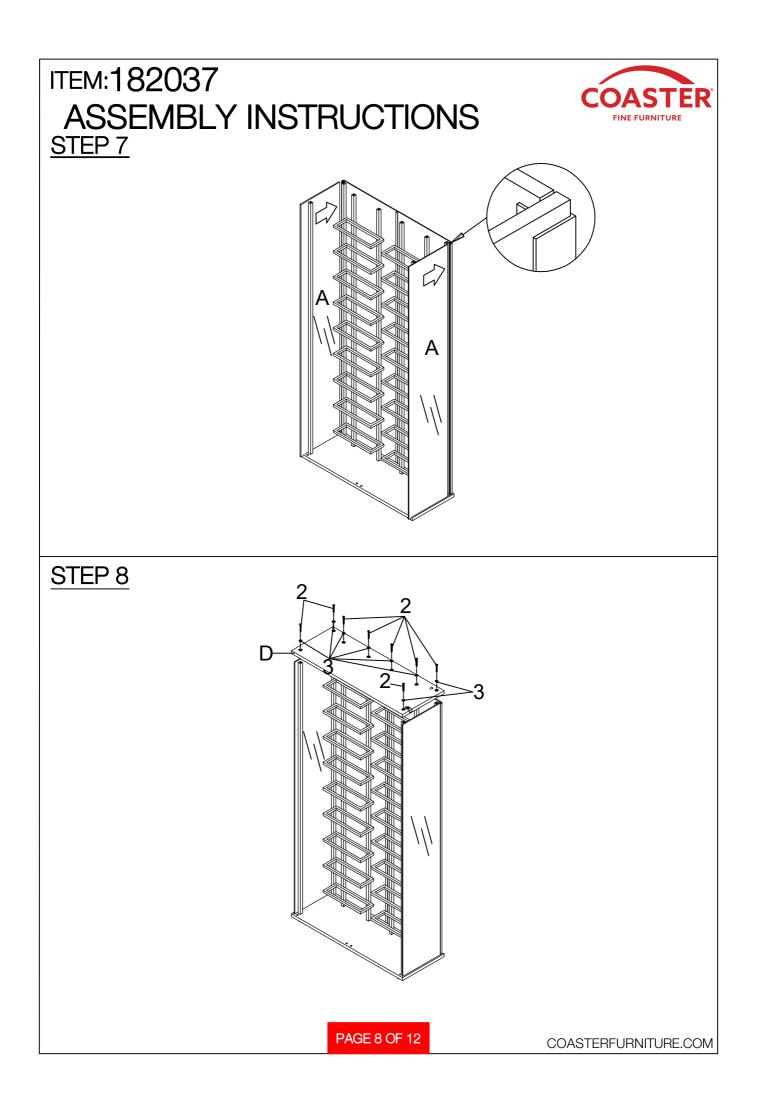

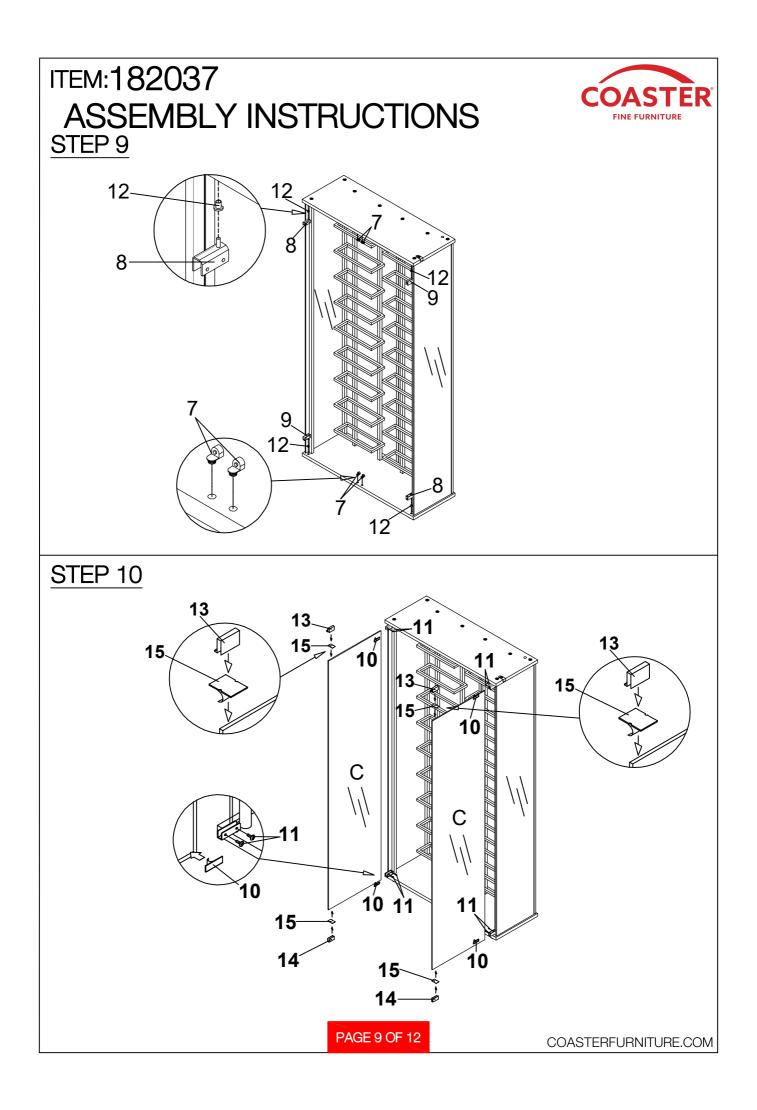

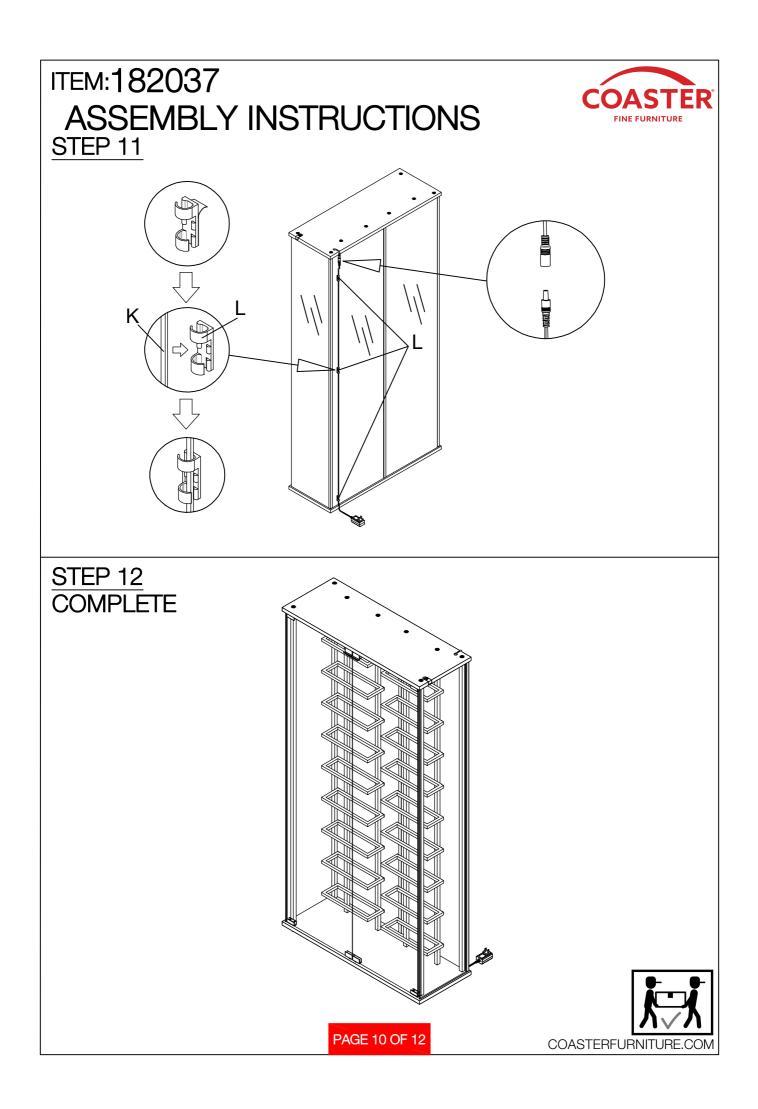

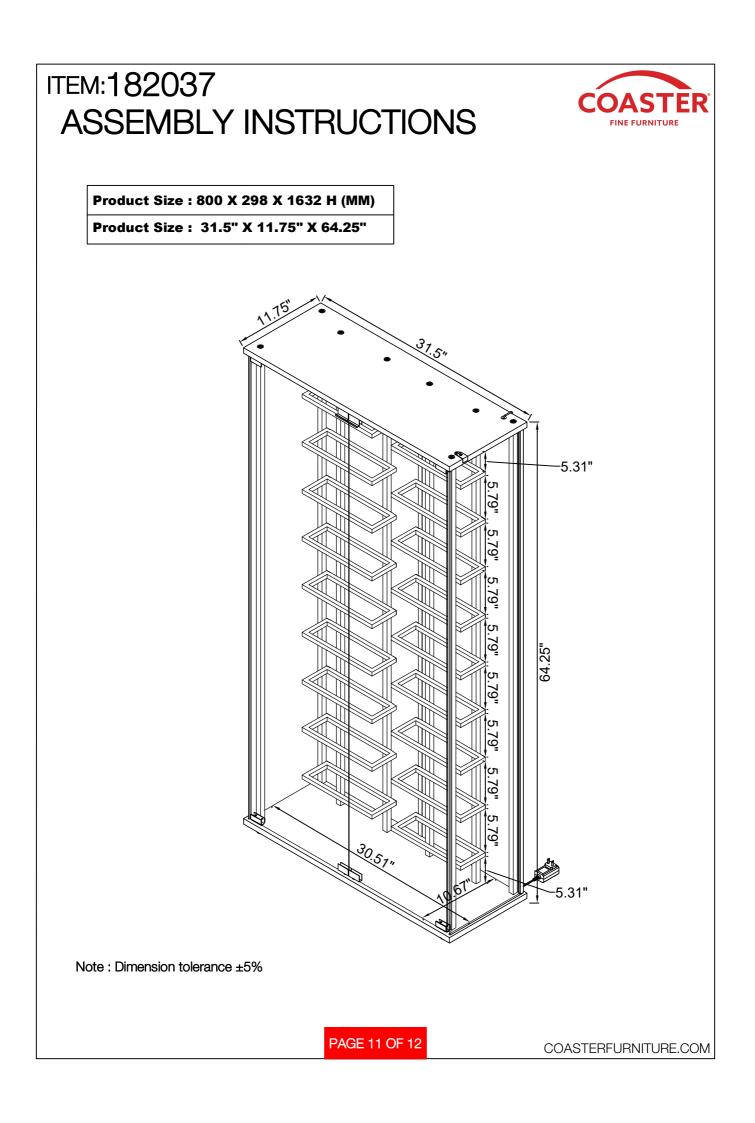

ITEM: 182037 ANTI-TIPPING INSTALLMENT INSTRUCTIONS



WARNING

Injury may result from tipping furniture. This restraint may protect against tipping furniture. Do not allow children to climb on furniture.


This restraint is not a substitute for proper adult supervision.

Failure to detach this restraint before moving the furniture may result in injury and damage.

This tip restraint must be attached to a wall stud using long screw enclosed.


<u>STEP 1</u>

Attach a bracket securely to the back top rail of the furniture using short screw provided, through the smaller hole.



STEP 2

Locate the other bracket on the wall over a plastic wall stud and two inches below the mounting bracket secured to the back of the furniture. Attach the wall stud using the long screw provided, through the smaller hole.

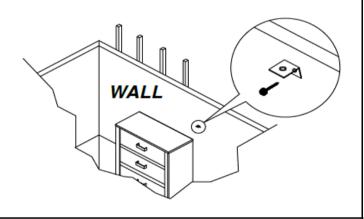

STEP 3

Place the furniture into position so both mounting brackets are vertically in line. Lace the end of the restraint strap through the larger hole in each mounting bracket. Bring both ends together and slide the flat end through the locking end and draw it through until all slack is removed. Confirm that the strap is securely laced and locked.

