



Vacuuming drawer Gaggenau Expressive series GV 451

GV 451 720

Stainless steel behind smoked glass.
Push-to-open.
Width 24" (60 cm),
Height 5 1/2" (14 cm).

Included accessories

50 vacuuming bag, small.
50 vacuuming bag, large.
1 raised vacuuming platform.
1 adaptor f. vacuuming outside the chamber.
1 vacuuming hose.
1 adaptor for bottle plugs.
3 plugs for vacuuming of bottles.

Optional accessories

Part No. 00578813
Vacuuming bags, small.
7" x 11", 100 pcs.

Part No. 00578814
Vacuuming bags, large.
9 1/2" x 14", 100 pcs.

Highlights

- Integrable in 5 1/4" (14 cm) high niche.
- Hygienic stainless steel vacuuming chamber, applicable height up to 3 1/8" (80 mm).
- 3 vacuuming levels for vacuuming in the chamber, max. 99%.
- 3 vacuuming levels for vacuuming outside the chamber, max. 90%.
- Automatic connection recognition for vacuuming outside the chamber.
- Handleless drawer.
- Push-to-open function.

Application

Vacuuming for sous-vide cooking.
Vacuuming for fast marinating and flavoring.
Vacuuming for extended storage.
Vacuuming of vacuuming containers outside the chamber.
Vacuuming of liquids in bottles outside the chamber.

Operation

Touch key operation.

Features


Oven cavity size 0.25 cu.ft. (7 liters).
Capacity load max. 22 lbs. (10 kg).
Maximum size of vacuuming bags
W 9 7/16" (240 mm) x L 13 3/4" (350 mm).
3 heat-sealing levels for different strengths of bag material.
Sealing bar, non-stick coating, removable.
Safety glass cover, opens automatically after vacuuming.
Raised vacuuming platform, 1 3/4" (44 mm), deployable.
Utility space in vacuuming chamber, W 8 1/4" (210 mm) x L 10 13/16" (275 mm).
Membrane for avoiding reflow of liquids during vacuuming outside the chamber.
Drying programme for vacuuming pump.

Planning notes

Plan the cutout without back wall.
Protrusion from appliance front to cabinet 1 1/8" (42 mm).
Consider the overhang when planning to open drawers next to the appliance.
Installation of GS/GM/GC directly above GV without intermediate shelf.
The electrical box must be accessible and located outside the built-in cutout.
The electrical box can be planned behind the appliance.

Rating

Total rating: 520 W (120 V).
Total amps: 4.3 A.
Minimum fuse protection: 10 A.
120 V, 60 Hz.
Plug (NEMA 5-15P), 71" cable.

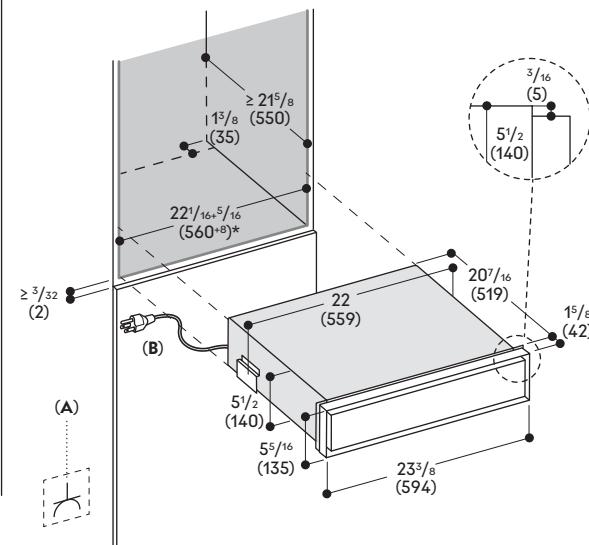

A: Accessible electrical connection

B: Fixed cable

* The width tolerance as shown in the drawing indicated by the + 5/16" (+8 mm) is the adjustment possible within the cabinet. Adjustments can be made between 5/8" – 1 1/16" (16-20 mm) for installation using the "centering parts" within the cabinet for perfect alignment. See installation instructions for details.