FI24FZC-L02

24", FREEZER, 0FZ Model

BUILT-IN

INTEGRATED® SERIE





FEATURES

- Made in Italy.
- Aisi 304 stainless steel body.
- Aluminium interior finish
- Antibacterial stainless steel interior.
- Provent ventilation system encourages uniform distribution of cold air in all fridge compartments by laterally circulation air.
- Equilance: dual - movemenet patented hinge with self - balancing movement ensures stability and resistance.
- Optiview: multi - LED light array (top and side interior) provides brilliant illumination to the entire interior.
- Soft close door and drawers in all compartments
- Smart touch TFT display
- Acoustic and visual signals
- Total no frost 100% automatic system
- Variable speed compressors mainteins precision temperature control with low vibration.
- Sabbath mode
- Front and rear adjustable feet up to 25 mm.
- One indipendent climatic zone.
- Tempered glass shelves with aluminium profiles.
- Crisper drawers for multi - use preservazion solution. Antibacterial stainless steel interior & rounded courners promoting hygiene and easy cleaning.
- Deep capacity within a standard depth is achieved by a side - mounted evaporators, wich leaves grater interior space.
- Full range of models and configurations (18", 24", 30" and 36"). Can easily be combined and configured with other Fhiaba fridge, freezer, wine cellar models to fit your kitchen needs.

GENERAL PROPERTIES

Reversible door	NO
Equilance	YES
SoftClosing Runner	NO
Low vibration	YES
Optieview (LED light spots)	YES
Shelves	2
Slide-out shelves	NO
Type of shelves	GLASS
Door Bins	2
Fridge drawers type	
Fresco/LowTemp Drawers	
Bottom drawers	4
Full Extension shelves 90° door opening	NO
Full Extension drawers 90° door opening	YES
Defrost Process	AUTOMATIC
Ice maker with water filter	YES
Door Open Alarms	YES
Humidity control	NO
Active carbon filter	NO
Air filter control	NO
Shopping Fridge	NO
Shopping Freezer	YES
Power Failure Function	YES


FI24FZC-LO2


24", FREEZER, 0FZ Model

BUILT-IN

INTEGRATED® SERIE

PRODUCT DETAIL

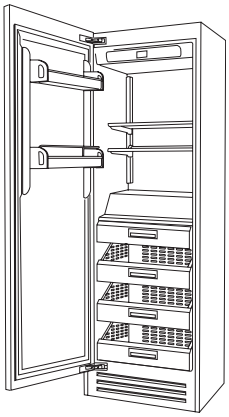

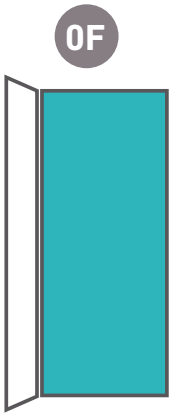

1D | 1M

freezer

D = door

M = separate microclimates

CAPACITY	
Capacity (cbf)	12.67
Compartment 1 / Upper wine cellar capacity (bottles)	
Compartment 2 / Lower wine cellar capacity (bottles)	
Compartment 3 / Bottom wine cellar capacity (bottles)	

TECHNICAL DETAILS	
Absorbed power (W)	
Total absorbed current (A)	2.5
Voltage (V)	115
Frequency (Hz)	60
Power Cord Length (in)	78" 3/4
Plug Type	3-prong (15 Amp)
Climatic class	SN/T
Refrigerant (gas)	R600a
Water connection / female attachment	3/4" NPT (1/4" elbow

EFFICIENCY	
Estimated Yearly Electricity Use	548

DIMENSIONS & WEIGHT	
Height of the product (closed weels) (in)	83" 1/2 (2120 mm)
Adjustable feet height (in)	1" (25 mm)
Width of the product (in)	24" (608 mm)
Depth of Product without handle (in)	24" (610 mm)
Wall cavity height (in)	84" (2134 mm)
Wall cavity width (in)	24" (610 mm)
Wall cavity depth (in)	min 24" (610 mm) + panel thickness for flush install
Net Weight (lbs)	311 (141 kg)
Gross Weight (lbs)	355 (161 kg)

TEMPERATURE RANGES	
Climatic compartments	1
Compartment 1 / Upper temperature (°F)	from -13 to -23
Compartment 2 / Middle temperature (°F)	
Low temp zone	NO
Compartment 3 / Low temperature (°F)	
Dual zone	NO


FI24FZC-LO2

24", FREEZER, 0FZ Model


BUILT-IN

INTEGRATED® SERIE


PRODUCT SPECIFICATIONS AND DIMENSIONS

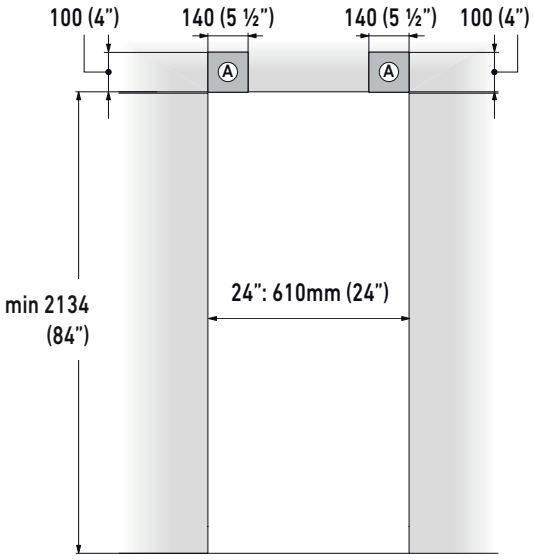

FRONT VIEW

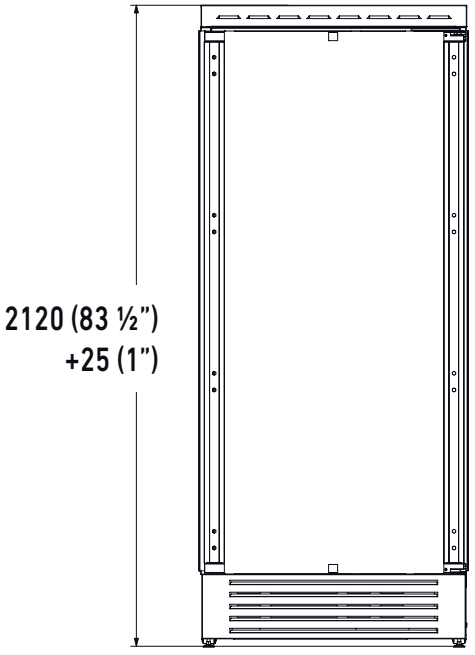

SIDE VIEW

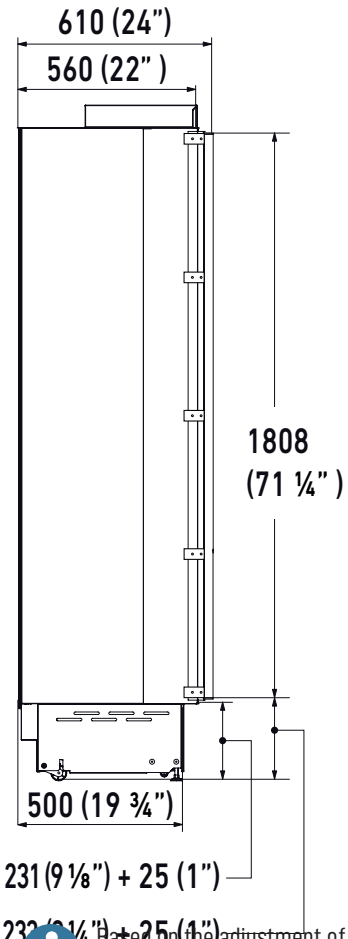

For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.

Based on the adjustment of the feet and the height of the panel from the floor, the customer defines the perforated plinth to be installed on the equipment.

FI24FZC-LO2

24", FREEZER, 0FZ Model

BUILT-IN


INTEGRATED® SERIE

PRODUCT SPECIFICATIONS AND DIMENSIONS

TOP VIEWS,


Door swing clearance

24" model: 1187 mm (46 ¾")

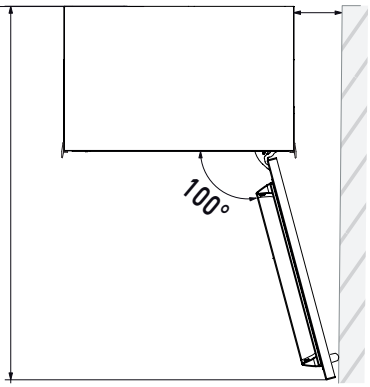

Minimum distance from the wall (hinge side)


24" model: 108 mm (4 ¼")

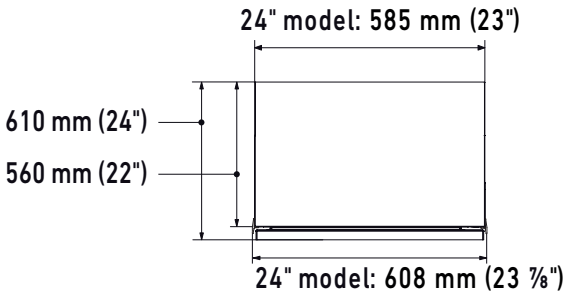

Width of cou out/opening

Width of appliance with mounting brackets installed (effective width)

PLINTH SIZE

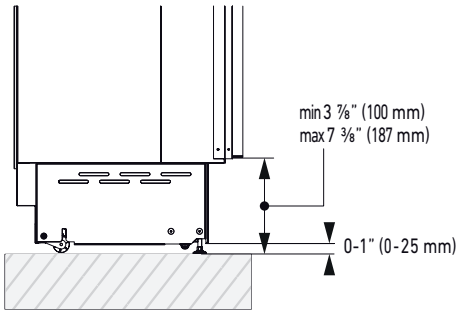


FI24FZC-LO2

24", FREEZER, 0FZ Model

BUILT-IN

INTEGRATED® SERIE

CUSTOM PANELS INFORMATION

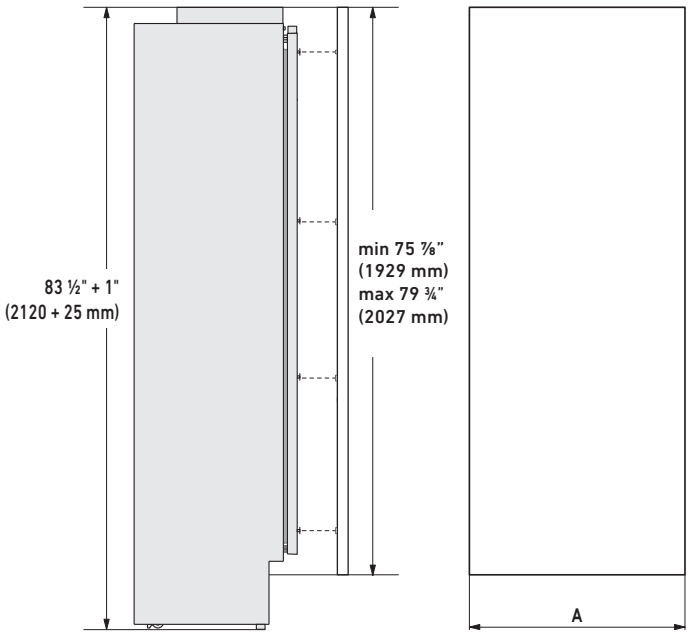

Serie	A
24"	23 ¾" (604 mm)

Integrated Panel Recommendations

Panels with thickness ranging between 3/4 in (18 mm) and 1" 1/8 in. (28 mm) Door panels with weight max of 75 lbs (34 kg) and drawer panels with weight max of lbs (kg) Provide installation of decorative panels during installation of the unit.

For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.

FI24FZC-L02


24", FREEZER, 0FZ Model

BUILT-IN

INTEGRATED® SERIE

PRODUCT SPECIFICATIONS AND DIMENSIONS

Electrical and Water connection

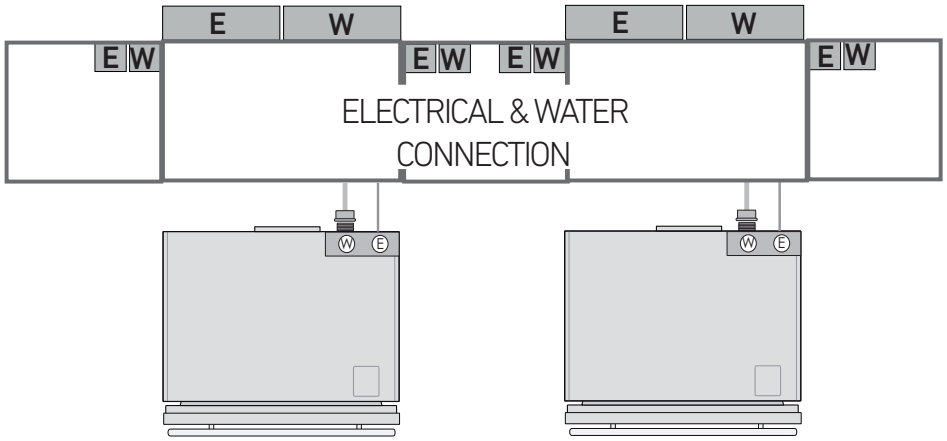

For installation specifications, please consult with Fhiaba.
For optimum installation, we recommend using the actual product as the best guide.

FI24FZC-LO2


24", FREEZER, 0FZ Model

BUILT-IN

INTEGRATED® SERIE

INSTALLATION INFORMATION

Niche dimensions for combined installation

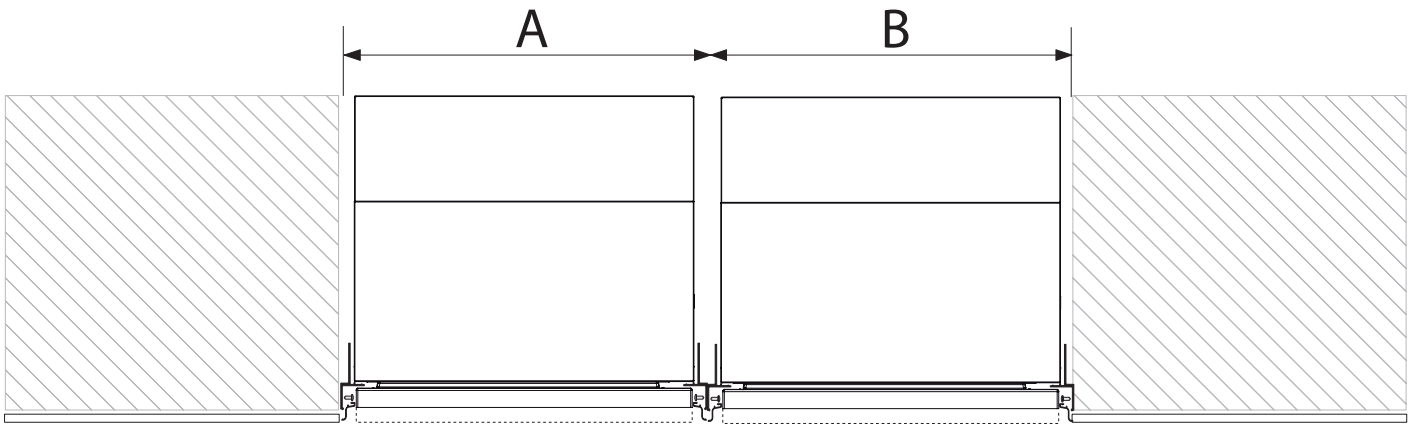

	A				
B		18”	24”	30”	36”
	18”	36”(914mm)	42”(1067mm)	48”(1220mm)	54”(1372mm)
	24”	42”(1067mm)	48”(1220mm)	54”(1372mm)	60”(1520mm)
	30”	48”(1220mm)	54”(1372mm)	60”(1520mm)	66”(1676mm)
	36”	54”(1372mm)	60”(1524mm)	66”(1676mm)	72”(1829mm)

ACCESSORIES

- Stainless steel sides panels
- Ice maker with water filter
- Water filtration system
- Joining kit
- Stainless steel tubolar handless 30mm
- Stainless steel tubolar handless 18mm
- Stainless steel panels
- Stainless steel portal for freestanding
- Extra lenght anti-tipping kit
- Anticondensation kit
- Cleaning kit
- Water filter cartridge
- FLD - Fhiaba Link Device
- Front ventilation kit
- 90° Door stop

For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.

www.fhiaba.com