







### **CONTROLS AND FUNCTIONS**

Control Soft touch square electronic

controls

Lighting 2 x 3W rectangular LED bulbs -

3 color levels (white, soft white,

yellow)

Power and

Filter Type

speed

860 CFM, 4-speeds

2 aluminum micro hole filters

and stainless steel baffle filters

**Duct transition** 6" / 8" round top

Yes

 $3 \frac{1}{4}$ " x 10" top and rear

Power-off **Delay Timer** 

**SPECIFICATIONS AND DIMENSIONS** 

**Dimensions** 27 ¾" (W) x 11 ¾" (D) x 11 ¾" (H)

Flush Fit Yes Installation

Stainless steel

grade

201


**Electrical** 120V / 60Hz

3-prong plug included requirements 2-year parts and labour Warranty

**UPC** code 628173081321


# AV/VA

#### **DIMENSIONS**

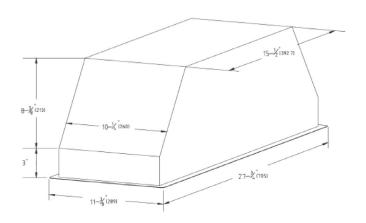

NOTE: Transition height is 4". The 6"/8" duct exit is NOT installed on the hood.

## **CABINET CUT-OUT**



A = opening of the cupboard

NOTE: For frameless cupboards, a  $\frac{3}{4}$ " (1.9 cm) front and rear edge is required to form a frame in the bottom of the cabinet. A  $\frac{3}{4}$ " (1.9 cm) thick support rod (not included) may be required for certain types of cabinets.

#### **DUCT TRANSITION**


Top 6" / 8" Round

3.25"x 10"rear and top





# **INSTALLATION**



Α	Floor to ceiling height	VARIABLE
В	Floor to counter top height (standard)	36"
С	Recommended height between cooking surface and bottom of the hood	28" to 30"
D	Hood height	16"
E	Cabinet Height	N/A