

User Guide for the HuddleSHOT Remote

August 2022

The remote provides basic in-conference functionality – zoom, volume control, and muting. You can also use it to get the camera's IP address.

Before you can use the remote, you will need to:

- Install the batteries
- Pair the remote with the camera

Installing the Batteries

The remote uses two AAA batteries.

1. Remove the cover from the back of the remote. You may need to press down on the upper edge while sliding it off.
2. Install the batteries as shown in the diagram in the battery opening.
3. Slide and snap the cover back into place.



Pairing the Remote to the Camera

The camera does not recognize or respond to the remote until they are paired. Do this after the camera is turned on and its indicator light is white.


If you do not have access to the administrative web interface:

1. Press and hold the multifunction button on the back of the camera until the indicator light blinks cyan.
2. While the indicator light blinks cyan, press the pairing button on the remote. The camera's indicator light changes to steady white when the pairing is complete. You may need to press the remote's pairing button more than once.
3. If the indicator light changes from blinking cyan to blinking blue, this indicates a pairing error: The pairing was not successful and pairing mode has timed out. Go back to step 1. If the problem persists, contact Vaddio Technical Support.

Note





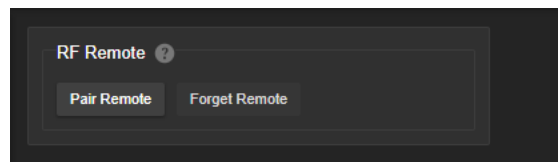


Any time a pairing error occurs (indicator blinking blue), Vaddio recommends rebooting the camera as soon as feasible. If pairing was successful, the remote remains paired through the reboot process.

If you have access to the administrative web interface:



1. On the Pairing page of the web interface, select Pair Remote.
2. When the camera's indicator light blinks cyan, press and hold the pairing button on the remote until the camera's indicator light changes to steady white.

HuddleSHOT Remote Quick Reference

	Power button and indicator – Set the camera to standby mode, or return to full-power mode.
	Mute button – Mute connected or built-in microphone(s).
	Home button – Returns the camera to its stored color settings. Arrow buttons – These buttons have no function on HuddleSHOT cameras, so they're great for fidgeting.
	Zoom + and – buttons – Zoom in (+) or out (–). The camera provides three zoom levels: 1x, 1.5x, and 2x.
	Volume +/- buttons – Increase or decrease the volume from the speaker.
	Pairing button – Use when pairing the remote with the camera. <i>Note: On some remotes, this button is marked differently.</i>
	Network button – Display the camera's IP address on the video output.




Other Things to Know About the Remote

Here are some common situations in which the remote can behave in ways you don't expect.

- **Environments with RF-controlled cameras in adjacent rooms** – If the remote is currently paired to a camera and within range of that camera, it will not pair with another camera.
- **The remote goes to standby mode after a brief period of inactivity.** Press a button to wake it up.
- **The remote is no longer paired after restoring the camera's factory defaults.** If you restore factory defaults on the camera, pair it with the remote again.

Unpairing the Remote

If you need to unpair the remote from the camera that currently recognizes it, you will need to log in to the camera's web interface as **admin**. On the Pairing page, select Forget Remote.

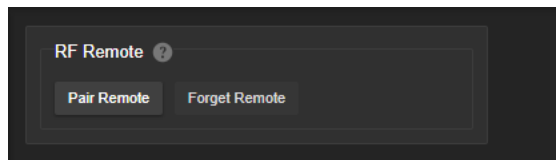

Vaddio is a brand of Legrand AV Inc. · www.legrandav.com · Phone 800.572.2011 / +1.763.971.4400 · Fax +1.763.971.4464 · Email av.vaddio.support@legrand.com

Vaddio is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.

©2022 Legrand AV Inc.