


R—D48MMG700

DOLCEVITA DUAL FUEL 48" RANGE



GENERAL FEATURES		
Size	48"	
Type	Dual Fuel	
Clock and Timer	Digital & Programmable	
Control Knobs	Metal	
Liquid Propane (LP)	LP Conversion Kit Included	
Power Requirements	120/240 Volt 60Hz 40 Amp dedicated circuit	
Warranty	2 years parts & labor within policy	
COOKTOP FEATURES		
Burners	7 Sealed Brass – 71,000BTU	
Rapid	12,000 BTU x 2	
Semi-Rapid	8,000 BTU x 3	
Double Crown	18,000 BTU x 1	
Auxiliary	5,000 BTU x 1	
Ignition Type	One-Touch, Instant with Safety Shut-off Thermocouple Feature	
Grates	Continuous Cast Iron	
Griddle	Optional	
OVEN FEATURES		
Interior Oven Dimension	Main Oven: 26.5W x 15D x 13H Side Oven: 11 ¼"W x 15"D x 13"H	
Power Rating	Main Oven: 3750W Side Oven: 2500W	
Convection Fan	Yes – 1 per Oven	
European Convection	Yes – Both Ovens	
Broil Element	Yes – Full Width, Both Ovens	
Functions	Bake, Bottom Bake, Upper Bake, Broil, Maxi Broil, Convection Bake, Convection Broil, Defrost, Pizza, Fan Assist	
Oven Door(s)	3 Pane Removable Glass	
Oven Lights	2 – Main Oven 1 – Side Oven	
Included Accessories	2 – standard rack, position adjustable 1 – glide rack, position stationary (main oven) 2 – enamel drip broiler tray	
DIMENSIONS		
Width (in)	47 7/8"	
Height (in) w/o Backguard	35 1/2" – 37 1/4"	
Height (in) of Backguard	4"	
Adjustable Leg Height	5 5/8" – 7 3/8"	
Depth (in) w/ Backguard	25 1/2"	
OPTIONAL ACCESSORIES		
TEPPANYAKI GRIDDLE	Stainless Steel	LFTEPSS
STEAK GRIDDLE PAN	Cast Iron	LFSTKGRD
SIMMER PLATE	Cast Iron	LFSIM
WOK SUPPORT RING	Cast Iron	LFWOK
PLINTH KICKPLATE	Stainless Steel	LF48PLNSS

COLOR OPTIONS:

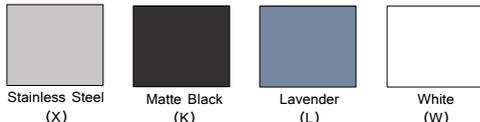

TRIM OPTIONS:



MAIN FEATURES:



BRASS BURNERS



METAL KNOBS & HANDLES



INTERNAL GREASE FILTER



VENTILATED DOORS WITH COOLING SYSTEM




TELESCOPIC GLIDE SHELF SUPPORTS



TRIPLE PANE GLASS DOORS

COOKTOP CONFIGURATION:

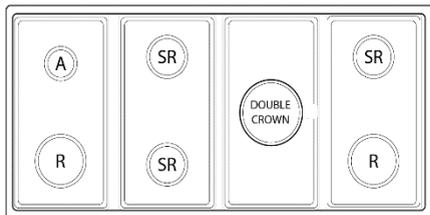

BURNER TYPE	MAX BTU
A	5,000
SR	8,000
R	12,000
DOUBLE	18,000




R—D48MMG700

DOLCEVITA DUAL FUEL 48" RANGE


EuroChef USA | www.lofra.us

DIMENSIONS:


FRONT VIEW

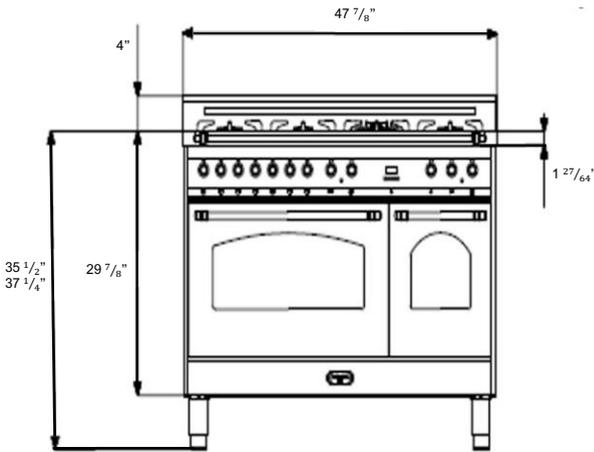


TOP VIEW

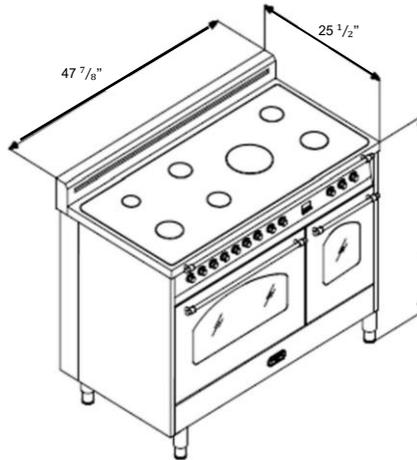

SIDE VIEW

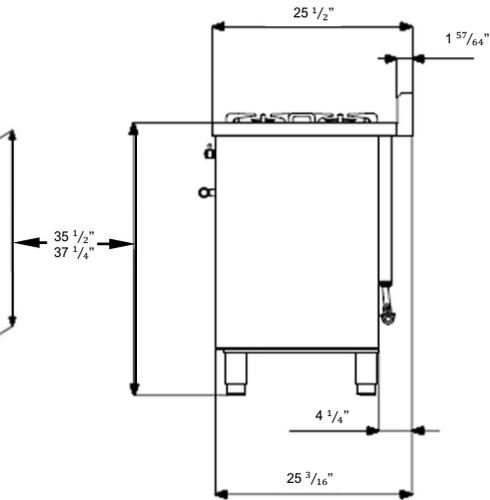

INSTALLATION CLEARANCES:

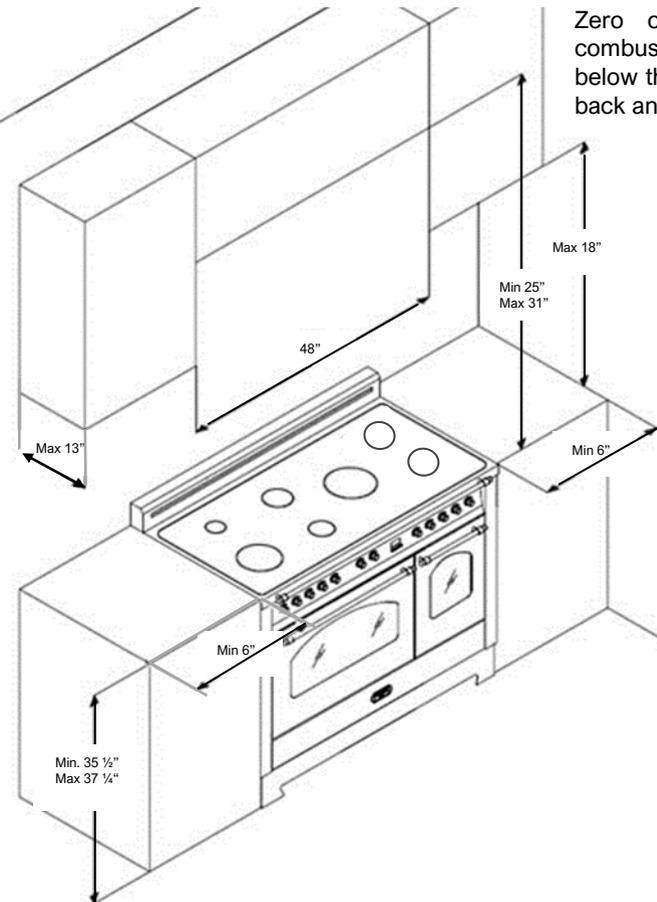


Zero clearance required between combustible construction that lies below the countertop surface and the back and sides of the appliance

HOOD

Min 25"
Max 31"

Min 35"
Max 37"

ELECTRICAL & GAS CLEARANCES:

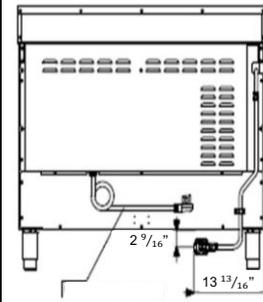


ELECTRICAL LINE
A properly-grounded horizontally-mounted electrical receptacle should be installed

GAS LINE
An agency-approved, properly-sized manual shut-off valve should be installed. To connect gas between shut-off valve and regulator, use agency-approved, properly sized flexible or rigid pipe.

Always check all local code requirements.

The below dimensions denote the location of the gas inlet and electrical junction box/receptacle. These are the recommended locations. For replacement purposes, the location of the existing utilities may be used provided they do not interfere with the side or rear of the range. Always check local building codes for permissible gas valve locations.

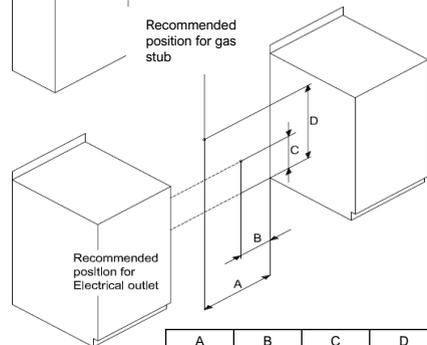

A	B	C	D
5 1/2"	6 5/8"	8 1/8"	26 5/8"