

INSTALLATION INSTRUCTIONS

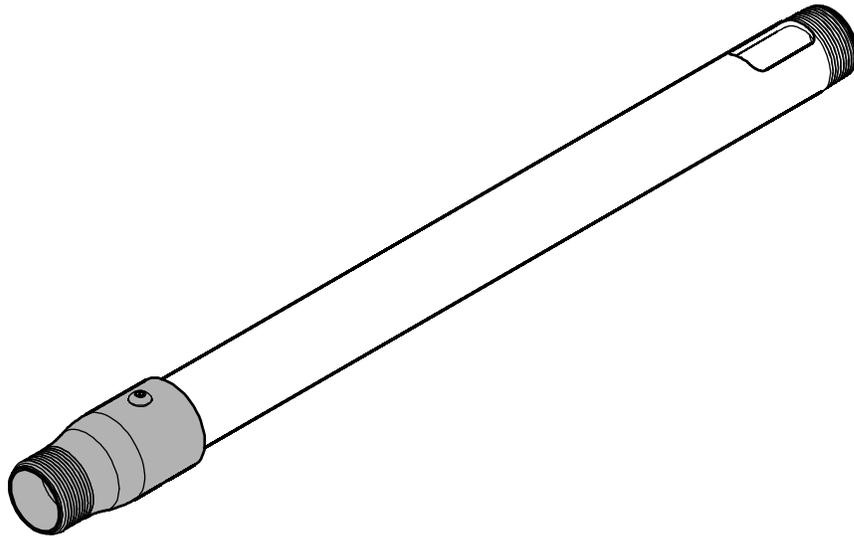

Cut-Off Thread Adapter

DISCLAIMER

Milestone AV Technologies, Inc., and its affiliated corporations and subsidiaries (collectively, "Milestone"), intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

Chief® is a registered trademark of Milestone AV Technologies. All rights reserved.



WARNING: Failure to read, thoroughly understand, and follow all instructions can result in serious personal injury, damage to equipment, or voiding of factory warranty! It is the installer's responsibility to make sure all components are properly assembled and installed using the instructions provided.



WARNING: Exceeding the weight capacity can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the combined weight of all components attached to the CMS-261 does not exceed 500 lbs (226.80 kg).

- The weight capacity of the CMS-261 may be LIMITED to the lowest weight capacity of any other component located between the CMS-261 and the supporting structure!



IMPORTANT WARNINGS AND CAUTIONS!




WARNING: A WARNING alerts you to the possibility of serious injury or death if you do not follow the instructions.




CAUTION: A CAUTION alerts you to the possibility of damage or destruction of equipment if you do not follow the corresponding instructions.

DIMENSIONS

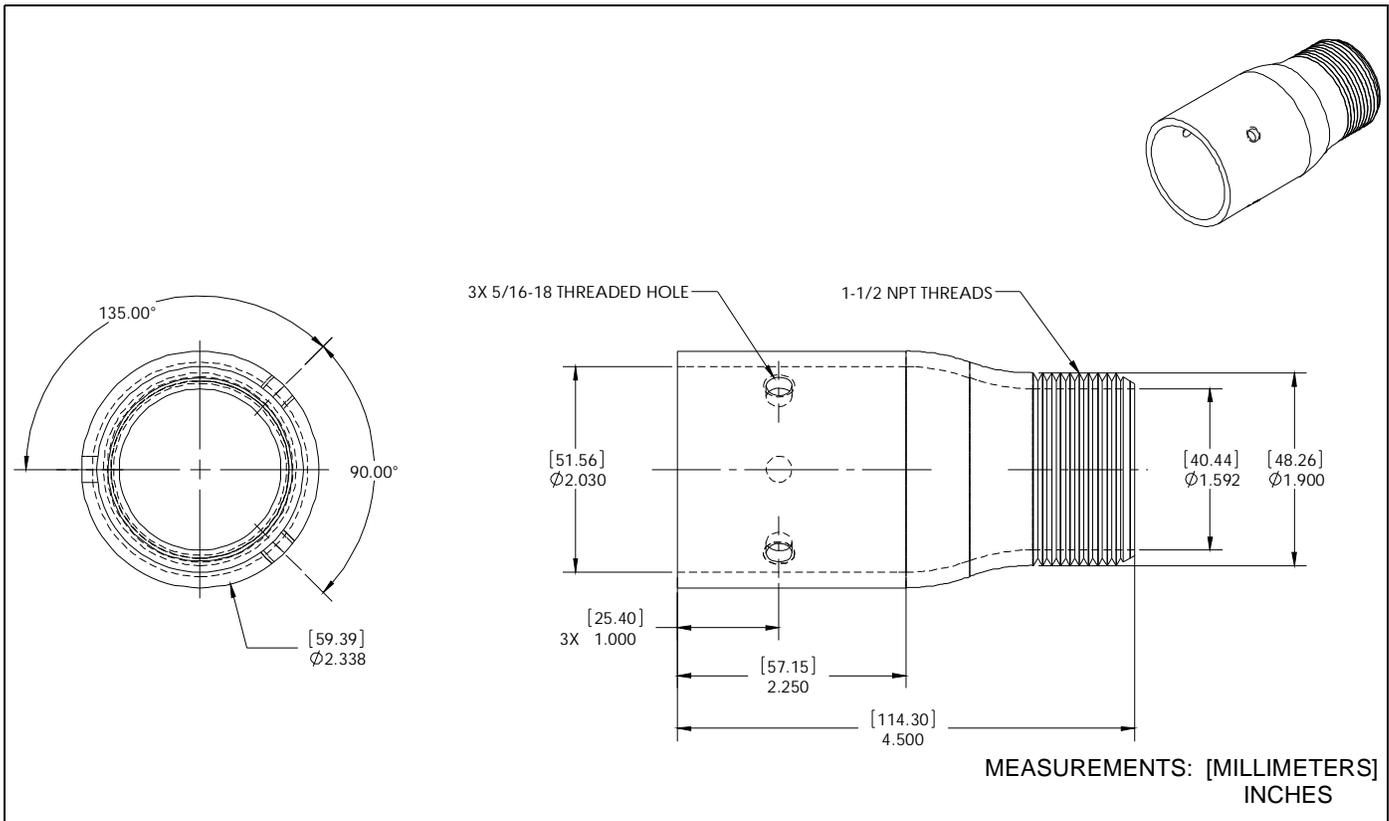

TOOLS REQUIRED / PARTS PROVIDED

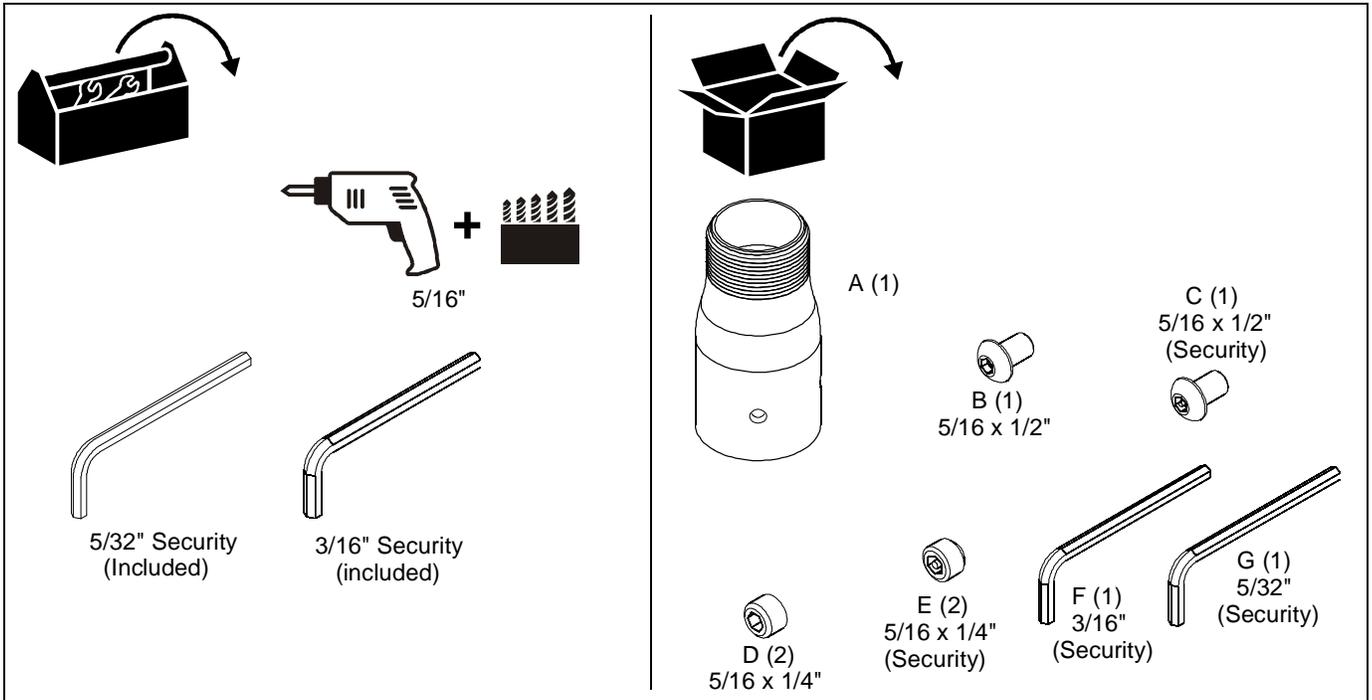

ASSEMBLING COLUMN

1. If required, cut off 1-1/2" NPT pipe at desired length.
2. Drill a 5/16" hole 1" from end of pipe. (See Figure 1)

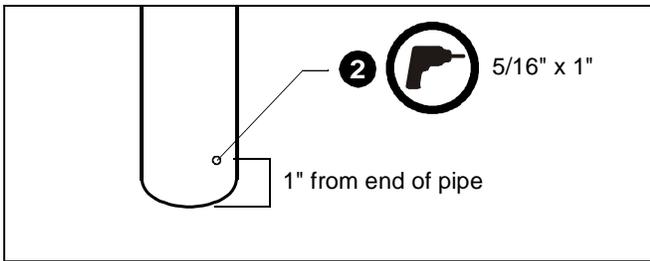


Figure 1

3. Slide CMS-261 (A) onto end of pipe and attach with a 5/16 x 1/2" button head cap screw (B) or 5/16 x 1/2" button head security cap screw (C). (See Figure 2)

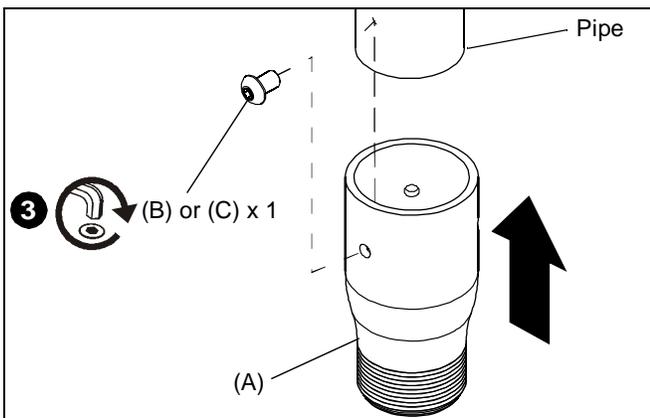


Figure 2

4. Attach and tighten two 5/16 x 1/4" set screws (D) or two 5/16 x 1/4" security set screws (E) into side of CMS-261 (A). (See Figure 3)

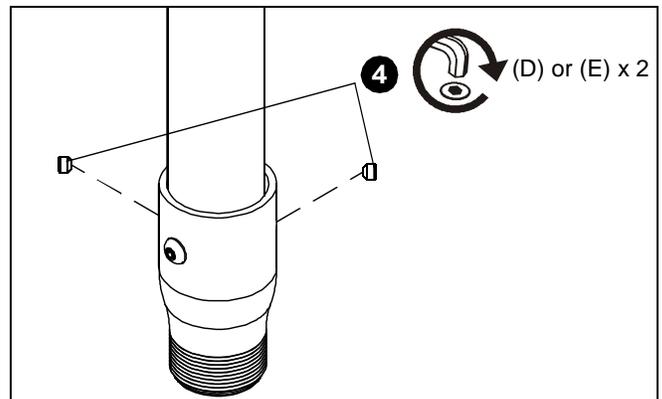


Figure 3

Install the 1-1/2" NPT threaded column with the attached CMS-261 following instructions provided with the column.



Our Mounts. **Your Vision.**

Chief Manufacturing, a products division
of Milestone AV Technologies

8803-002011 Rev00
©2010 Milestone AV Technologies, a
Duchossois Group Company
www.chiefmfg.com
03/10

USA/International	A 8401 Eagle Creek Parkway, Savage, MN 55378 P 800.582.6480 / 952.894.6280 F 877.894.6918 / 952.894.6918
Europe	A Fellenoord 130 5611 ZB EINDHOVEN, The Netherlands P +31 (0)40 2668620 F +31 (0)40 2668615
Asia Pacific	A Office No. 1 on 12/F, Shatin Galleria 18-24 Shan Mei Street Fotan, Shatin, Hong Kong P 852 2145 4099 F 852 2145 4477

