

AGA Companion Freestanding Dual Fuel Range



Model # ACMP



Don't let this little range fool you. At 24" inches wide, it may be small in stature, but it's big on performance and style. This dual-fuel range features four versatile gas burners, one conventional oven with an integral broiler and one convection oven. This free standing range brings the versatility of dual-fuel cooking into any kitchen. An AGA Companion will give you the ultimate versatility of cooking with live gas flame and electric ovens all wrapped in one!

- Iconic AGA signature look with cast iron doors and cast iron exterior
- 24" wide range boasts one Conventional Oven with Rapid Response Electric Grill/Broiler, a Convection Oven with fan and 4 gas burner range top
- Two 6,150 BTU, one 10,600 BTU and one 12,000 BTU gas burners – available in natural gas and liquid propane
- Range may be used freestanding

ORDERING DETAILS

Colors	Natural Gas Model #	Liquid Propane Model #
Black	ACMP-NG-BLK	ACMP-LP-BLK
British Racing Green	ACMP-NG-BRG	ACMP-LP-BRG
Claret	ACMP-NG-CLT	ACMP-LP-CLT
Pearl Ashes	ACMP-NG-PAS	ACMP-LP-PAS
Pewter	ACMP-NG-PWT	ACMP-LP-PWT
Cream	ACMP-NG-CRM	ACMP-LP-CRM
Dark Blue	ACMP-NG-DBL	ACMP-LP-DBL
Aubergine	AACMP-NG-AUB	AACMP-LP-AUB
Heather	ACMP-NG-HEA	ACMP-LP-HEA
Pistachio	ACMP-NG-PIS	ACMP-LP-PIS
White	ACMP-NG-WHT	ACMP-LP-WHT


Cast iron range is coated in hygienic, easy-to-clean vitreous enamel and is available in 11 colors



AGA Companion Freestanding Dual Fuel Range




Model # ACMP

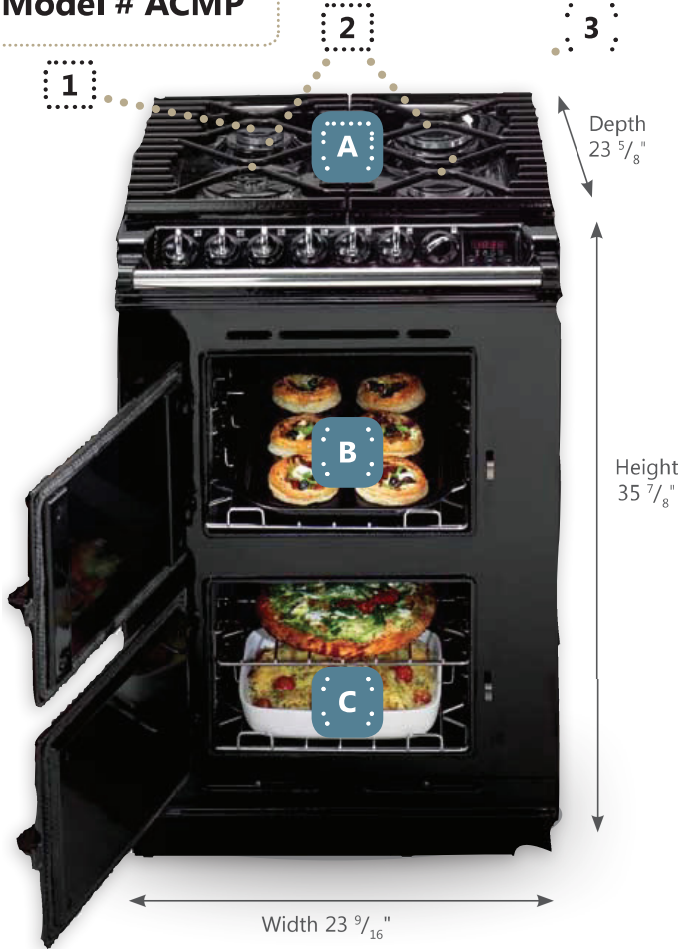

Technical Specifications

Overall Dimensions	35 ⁷ / ₈ " H x 23 ⁵ / ₈ " W x 24 ¹ / ₂ " D
A. Gas Range Top	(4) 10" x 10" Burners
B. Conventional Oven With Broiler	8 ¹ / ₂ " H x 13 ³ / ₄ " W x 19" D
C. Convection Oven With Fan	10" H x 13 ⁵ / ₈ " W x 17" D
1. Rapid Burner	11,000 Btu/hr
2. Semi Rapid Burner	6,150 Btu/hr
3. Wok Burner	12,000 Btu/hr
Weight	310 lbs
Shipping Weight	345 lbs
Electrical Requirements	240v, 40amp, 60Hz
Fuel/Power	Natural Gas Burners, Electric Ovens
Vent Options	In room venting flue
Warranty	1 Year Limited Warranty on all parts and labor
Shipping Instruction	Ships fully assembled

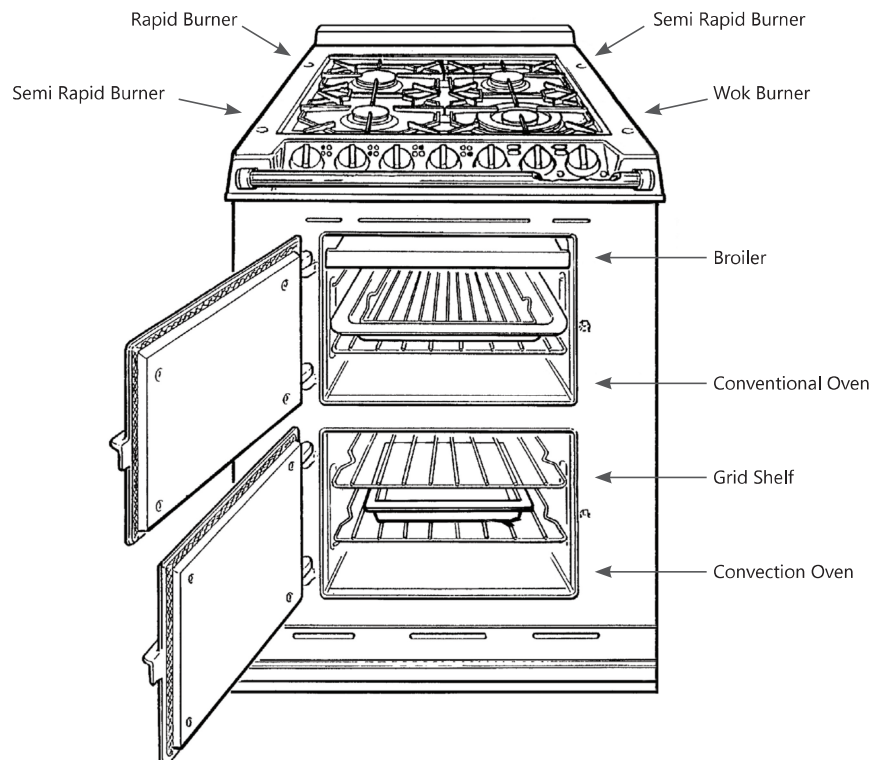


AGA Companion Freestanding Dual Fuel Range

Model # ACMP



Installation

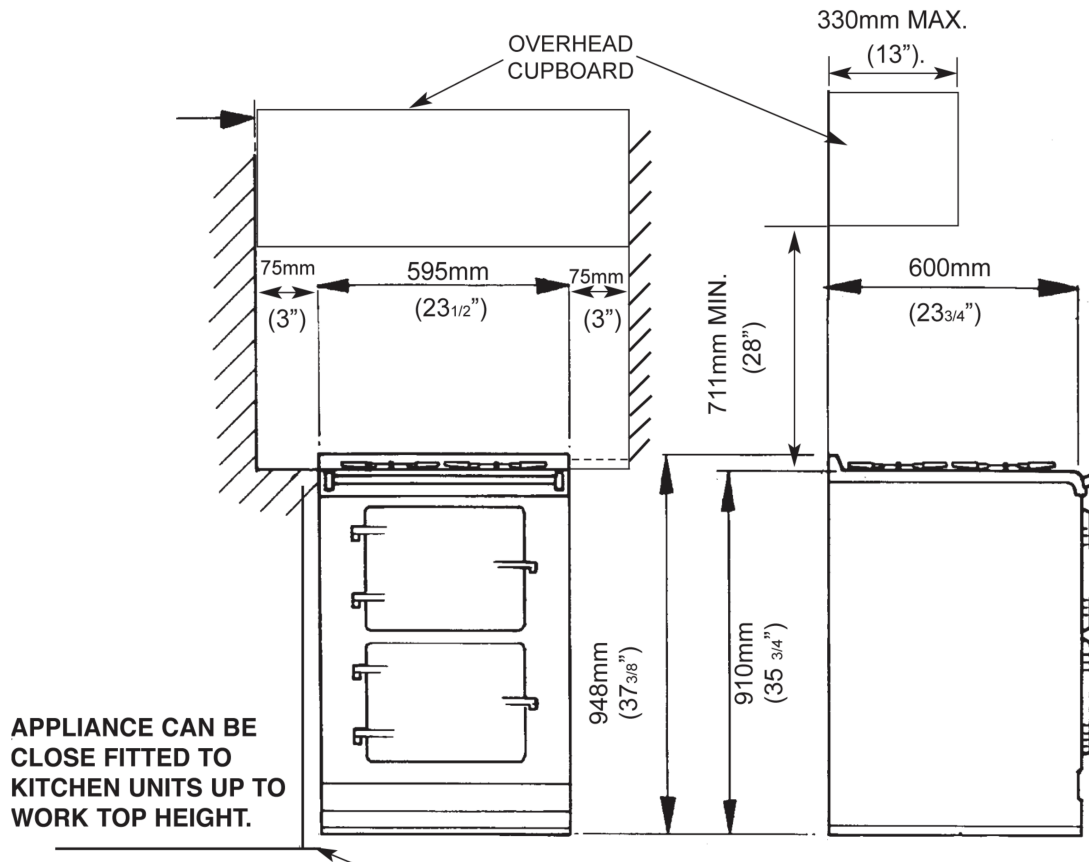

Range Dimensions

When surveying for a range installation the actual clearance required for the 'body' of the appliance should be increased overall by 1/2" beyond the figures quoted. This allows safe margin to take into account the natural dimensional variations found in major castings. In particular the width across an appliance recess could be critical.

Location

The side wall clearance above the gas hob shall be greater than 3". Surfaces over the top of the range must not be closer than 28" and must not exceed 13" in depth.

The vent slots in the back of the top plate must not be obstructed.

Note: It is essential that the supply cable is routed away from any hot surfaces i.e. hot flue pipes. In the interests of safety, due consideration must be given to the protection of the electric cable to the Module/Companion.

The Module/Companion requires a 30 amp power supply and must be connected to the mains with a cable which complies with the latest codes.

An easily accessible manual shut off gas valve must be fitted before the metal flexi gas line supply to the range. DO NOT fit valve behind the range. Any opening in the wall behind the appliance and in the floor under the appliance must be sealed.

Leveling

The AGA Companion is designed to stand on a flat surface, however any unevenness may be overcome by packing under the corners of the plinth with a suitable non-combustible material, (up to 1/8").

Ranges must have an anti-tip device correctly installed. If you pull the range out from the wall for any reason, make sure that the device is properly engaged when you push the range back against the wall. If it is not, there is a possible risk of the range tipping over and causing injury if you or a child stand, sit or lean on an open door.

To reduce the risk of tipping, the range must be secured by a properly installed anti-tip bracket supplied with the range. The bracket must be fitted within the shaded area shown in the diagram using 2 x screws (No. 10 x 1 1/4") fixed in the wall or floor, longer screws may be required depending on the wall or floor covering.