



24" FREEZER COLUMN
Panel Ready



eco friendly
R600a Refrigerant



Solid Door Model

JOB	
AREA	
ITEM NO.	
MODEL NO.	

MODELS	DESCRIPTION
CR24F-1-2L	Freezer, solid overlay ready, hinged left
CR24F-1-2R	Freezer, solid overlay ready, hinged right

KEY PRODUCT FEATURES AND BENEFITS

- PerliQ™ touch screen control panel disappears into the background until awoken for a modern look
- Customize temperature, activate sabbath mode, or adjust lighting with the sleek PerliQ™ Control panel
- All stainless steel interior provides a hygienic, easy to clean, and beautiful cabinet
- Full extension all stainless steel bins provide easy access to items stored in the lower half of the cabinet
- Energy efficient and eco-friendly R600a referigérant has zero ozone depletion potential and is up to 30% more effcient than systems using R134a
- Industry-exclusive removable freezer deck allows freezer system to be removed and replaced with a new deck without the need to uninstall unit

Quick Features:

- Roll-on theatre lighting brightly illuminates cabinet, adjust brightness with five built in settings
- Integrated design comes ready to accept custom panel and hardware, stainless steel panels available (ordered seperately)
- 16.6 cu ft of storage capacity
- Full three year warranty plus additional nine years on sealed system



24" FREEZER COLUMN
Panel Ready

MODEL NUMBERS		CR24F-1-2L	CR24F-1-2R
MODEL DESCRIPTION		Freezer, solid overlay ready, hinged left	Freezer, solid overlay ready, hinged right
OVERALL DIMENSIONS	Width - in. (mm)	23-3/4"	23-3/4"
	Depth - in. (mm)	24"*	24"*
	Height - in. (mm)	83-11/16"	83-11/16"
OPENING DIMENSIONS	Width - in. (mm)	24"	24"
	Depth - in. (mm)	24"	24"
	Height - in. (mm)	84"	84"
DEPTH WITH DOOR OPEN		49-3/4" (less door overlay installed)	49-3/4" (less door overlay installed)
INTERNAL VOLUME Net. Cu. Ft.		12.6 cu. ft.	12.6 cu. ft.
SHIPPING WEIGHT Lbs. (kg.)		448 lbs	448 lbs
ELECTRICAL SPECIFICATIONS	Electrical Supply	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph
	Running Load Amps	2.3 amps	2.3 amps
	Electrical Service	15 amp dedicated circuit	15 amp dedicated circuit
	Cord Plug Type	NEMA 5-15 plug, 5' /3 prong grounding-type	NEMA 5-15 plug, 5' /3 prong grounding-type
FREEZER SPECIFICATIONS	Refrigerant	R600a (45g)	R600a (45g)
	Main Compartment Temperature Settings F°(C°)	Factory Set to 0° (Range -10°-10°F)	Factory Set to 0° (Range -10°-10°F)
Ambient Condition†		F° 70 80 90 RH% 80 78 75	F° 70 80 90 RH% 80 78 75

*Less panel. With typical 3/4" overlay panel installed, depth becomes 24-3/4"

† In extreme ambient conditions that exceed those in the corresponding table, condensation may start to form on the front face of the cabinet. Condensation will subside as ambient temperature (F°) and relative humidity (RH%) lower to levels shown in table.


ACCESSORIES

- Dual installation kits
- Stainless steel exterior side finishing panels
- Stainless steel door panels with Perlick Pro Handle

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit perlick.com.




24" FREEZER COLUMN
Panel Ready

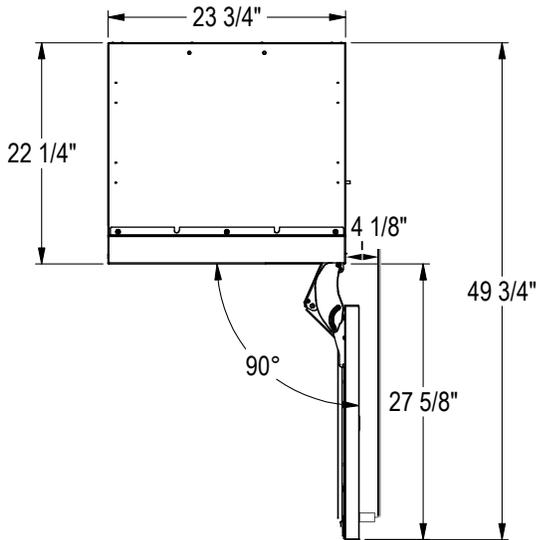


Max clearance required for opened door is 49-3/4" when opened to 90°* (dimensions shown are without door overlay installed.)

(Please note that door opens to 115°.)


*90° achieved when included hinge stop pin is installed. Pin must be installed prior to full integration

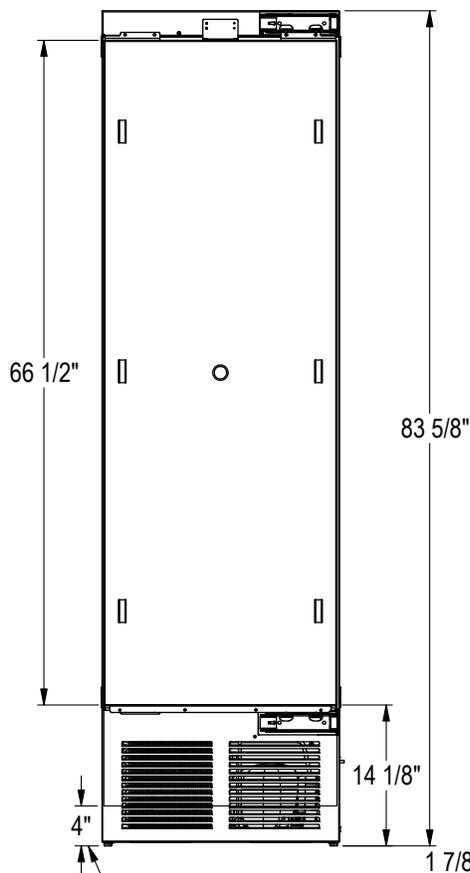

OVERLAY TEMPLATE DIMENSIONAL LIMIT

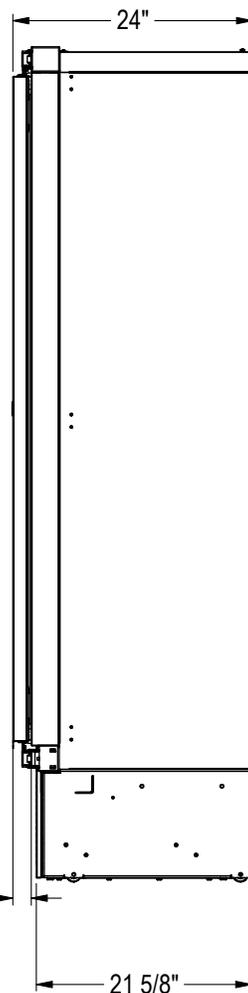

CABINET OPENING

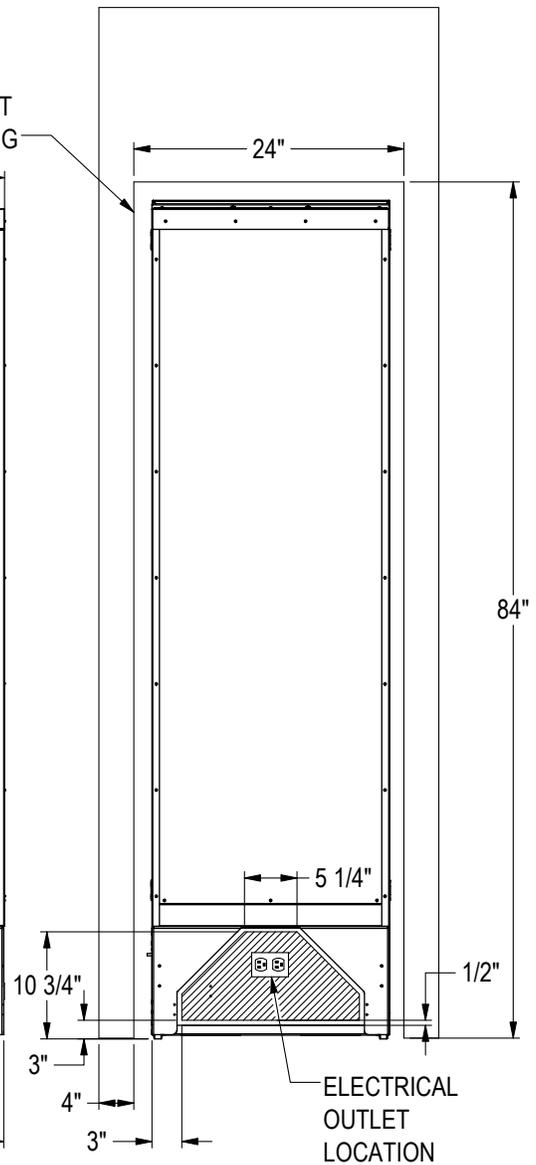

ELECTRICAL OUTLET LOCATION