

This quick reference guide to cooking accessories will help to make sure you have what you need for a successful installation in just 3 easy steps.

Step 1 Find your model number.

Step 2 Read the information on required and optional accessories to determine your needs and prepare yourself by knowing the answers to the following questions.

- Gas or electric appliance?
- If purchasing a gas range or gas cooktop, what fuel type is used in your home - natural gas (NG) or liquid propane (LP)?
- Do you have the required electrical supply and an adequately sized circuit breaker?
- If installing an over-the-range microwave or hood, have you planned for venting? Will you be venting externally or recirculating?

Step 3 Identify the items you need to purchase for your cooking appliance.

Where to purchase accessories

Accessories can be purchased in-store with unit, or from LG Canada Parts & Accessories:


[Shop online at LGCanadaParts.com](https://www.lgcanadaparts.com)

Call 1-855-341-2732



Contents

Electric/induction ranges.	2-3
Gas ranges	4-5
Over-the-range microwaves.	6
Hood fans	7
Wall ovens.	8
Cooktops.	9-10

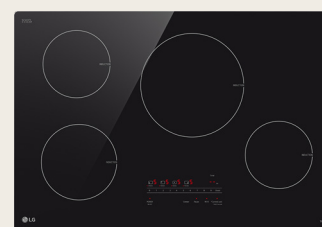

LG electric/induction slide-in range accessory guide



LSIS6338_(F,N)



LSES6338F



LSEL6337XE



LSIL6336XE



LSEL6335_(XE/ZE)



LSIL6334XE



LSEL6333_(XE/ZE)



LSIL6332XE



LSEL6331XE



LSEL6330S

Electrical requirements		Included	4-Prong power cord included
LG electric/induction slide-in ranges have a 4-prong power cord attached to the unit.		Required purchase	Power cord connects to a 240/208 V, 60 Hz, properly grounded dedicated circuit protected by a 40 or 50 Amp circuit breaker (Outlet must be installed by a holder of a valid electrical certificate and must abide by local codes)
Anti-tip bracket		Included	Anti-tip bracket included and must be installed
An anti-tip bracket is included and must be installed. Do not operate the range without the anti-tip bracket in place.		Included	Anti-tip bracket included and must be installed
Concrete floor installation		Optional purchase	Lag bolt or 1/2" O.D. sleeve anchor (concrete floors only)
Additional parts needed when installing on concrete floor.		Optional purchase	Lag bolt or 1/2" O.D. sleeve anchor (concrete floors only)
Rear filler		Included	Rear filler - MCR67468503 included
If the counter does not bridge the opening at the rear wall, the rear filler kit that is provided with the slide-in range, will be needed.		Included	Rear filler - MCR67468503 included
Broiler pan and grid		Optional purchase	Grid pan – MJS61849903
Broiler pan and grid		Optional purchase	Broiler pan – MJS61850003
Air Fry tray		Included	Air Fry tray - LRAL303S included with slide-in ranges with Air Fry feature: LSIS6338_(F,N), LSES6338F, LSEL6337XE, LSIL6336XE, LSEL6335_, LSIL6334XE, LSIL6332XE, LSEL6333_
Racks		Included	Premium gliding rack - AHT74173805
Racks		Optional purchase	Premium gliding rack - AHT74173805
Racks		Included	Additional standard oven rack - MHL64712101 Your range already comes with 2 racks, but you can purchase an additional rack if desired
Racks		Included	Additional heavy duty oven rack - MHL63411413 Your range already comes with either 2 or 3 depending on the model, but you can purchase an additional rack if desired



Accessories can be purchased in-store with unit, or from LG Parts & Accessories:

Shop online at [LgCanadaParts.com](https://www.lgcanadaparts.com)

Call 1-855-341-2732

LG electric/induction freestanding range accessory guide



LDEL7324SE



LRIN6323YE











LREN6325_(XE/ZE)



LREN6323_(YE/ZE)



LREN6321VE

<p>Electrical requirements LG electric freestanding ranges have a 4-prong power cord attached to the unit.</p>		<p>Included</p>	<p>4-Prong power cord included</p>	
<p>Anti-tip bracket An anti-tip bracket is included and must be installed. Do not operate the range without the anti-tip bracket in place.</p>		<p>Included</p>	<p>Anti-tip bracket included and must be installed</p>	
<p>Concrete floor installation Additional parts needed when installing on concrete floor.</p>		<p>Optional purchase</p>	<p>Lag bolt or 1/2" O.D. sleeve anchor (concrete floors only)</p>	
<p>Broiler pan and grid</p>		<p>Optional purchase</p>	<p>Grid pan – MJS61849903</p>	
		<p>Optional purchase</p>	<p>Broiler pan – MJS61850003</p>	
<p>Air Fry tray</p>		<p>Optional purchase</p>	<p>Air Fry tray - LRAL303S (For use with models with Air Fry feature: LDEL7324SE)</p>	
		<p>Included</p>	<p>Air Fry tray - LRAL303S - LREN6325_, LREN6323_</p>	
<p>Rack</p>		<p>Included</p>	<p>Additional standard oven rack - MHL64712101 (For use with models: LDEL7324SE, LREL6325_(F, D), LREL6323_(S, D), LREL6321S) Your range already comes with either 2 or 3 depending on the model, but you can purchase an additional rack if desired</p>	
<p>Rubber gasket For customers who prefer extra spill protection, these can be installed in between the range and adjacent countertop, but are not required.</p>		<p>Included</p>	<p>Not applicable</p>	<p>2 rubber gaskets are included with your range - AAA31560301</p>











LG gas slide-in range accessory guide



LSGS6338_(F,N)



LSGL6335_(X/Z)

<p>Electrical requirements LG gas slide-in ranges have a 3-prong power cord attached to the unit.</p>		Included	3-Prong power cord included
<p>Installation parts required for gas hookup</p>		Required purchase	<p>Gas line shut-off valve Joint sealant Flexible metal appliance connector (3/4" or 1/2" NPT x 1/2" I.D.) Flare union adapter for connection to gas supply line (3/4" or 1/2" NPT x 1/2" I.D.) Flare union adapter for connection to pressure regulator on range (1/2" NPT x 1/2" I.D.) (Must be installed by a holder of a certified gas technician and abide by local gas codes)</p>
<p>Anti-tip bracket An anti-tip bracket is included and must be installed. Do not operate the range without the anti-tip bracket in place.</p>		Included	Anti-tip bracket included and must be installed
<p>Concrete floor installation Additional parts needed when installing on concrete floor.</p>		Optional purchase	Lag bolt or 1/2" O.D. sleeve anchor (concrete floors only)
<p>LP conversion kit If your home uses liquid propane (LP) instead of natural gas (NG), utilize the LP conversion kit.</p>		Included	LP conversion kit included
<p>Rear filler If the counter does not bridge the opening at the rear wall, the rear filler kit that is provided with the slide-in range, will be needed.</p>		Included	Rear filler - MCR67468503 included
<p>Broiler pan and grid</p>		Optional purchase	Grid pan – MJS61849903
		Optional purchase	Broiler pan – MJS61850003
<p>Air fry tray</p>		Included	Air Fry tray - LRAL303S included with slide-in ranges with Air Fry feature: LSGS6338_, LSG6335_
<p>Rack</p>		Included	Additional heavy duty oven rack - MHL63411413 Your range already comes with either 2 or 3 depending on the model, but you can purchase an additional rack if desired










LG gas freestanding range accessory guide



LRGN6325X



LRGN6323Y

<p>Electrical requirements LG gas freestanding ranges have a 3-prong power cord attached to the unit.</p>		<p>Included</p>	<p>3-Prong power cord included</p>
<p>Installation parts required for gas hookup</p>		<p>Required purchase</p>	<p>Power cord connects to a 120V, 60 Hz, properly grounded dedicated circuit protected by a 15 or 20 Amp circuit breaker, or a time delay fuse is required (Outlet must be installed by a holder of a valid electrical certificate and must abide by local codes)</p> <p>Gas line shut-off valve Joint sealant Flexible metal appliance connector (3/4" or 1/2" NPT x 1/2" I.D.) Flare union adapter for connection to gas supply line (3/4" or 1/2" NPT x 1/2" I.D.) Flare union adapter for connection to pressure regulator on range (1/2" NPT x 1/2" I.D.) (Must be installed by a holder of a certified gas technician and abide by local gas codes)</p>
<p>Anti-tip bracket An anti-tip bracket is included and must be installed. Do not operate the range without the anti-tip bracket in place.</p>		<p>Included</p>	<p>Anti-tip bracket included and must be installed</p>
<p>Concrete floor installation Additional parts needed when installing on concrete floor.</p>		<p>Optional purchase</p>	<p>Lag bolt or 1/2" O.D. Sleeve anchor (concrete floors only)</p>
<p>LP conversion kit If your home uses liquid propane (LP) instead of natural gas (NG), utilize the LP conversion kit.</p>		<p>Included</p>	<p>LP conversion kit included</p>
<p>Broiler pan and grid</p>		<p>Optional purchase</p>	<p>Grid pan – MJS61849903</p>
<p>Broiler pan and grid</p>		<p>Optional purchase</p>	<p>Broiler pan – MJS61850003</p>
<p>Air Fry tray</p>		<p>Included</p>	<p>Air Fry tray - LRAL303S</p>
<p>Rack</p>		<p>Included</p>	<p>Additional standard oven rack - MHL64712101 Your range already comes with 2, but you can purchase an additional rack if desired</p>

LG over-the-range microwaves accessory guide



MVEL2137_(F, D)



MVEL2125X



MVEL2033F



MVEM1825X



MVEF1337F



MVEF1323F



MVEF1323F

Electrical requirements

LG OTRs have a 3-prong power cord attached to the unit.



Included

3-Prong power cord included

Required purchase


Power cord connects to a 120 V, 60 Hz, properly grounded dedicated circuit protected by a 15 Amp circuit breaker is required (Outlet must be installed by a holder of a valid electrical certificate and must abide by local codes)

Venting requirements

LG OTRs must be properly vented in one of three ways. Do not vent into a wall cavity, attic or unused area. Venting ductwork is not provided and should be purchased separately.

1. Roof venting with 3" 1/4 x 10" duct or 6" round duct
2. Wall venting with 3" 1/4 x 10" duct or 6" round duct
3. Room venting (recirculating)

Required purchase

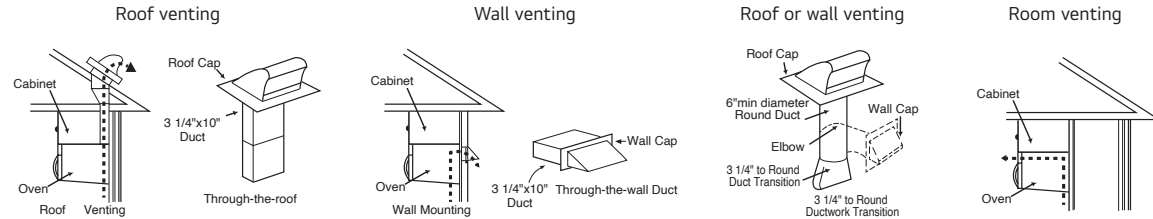

Installation parts you may need for outside venting



Required purchase


Required purchase

Roof venting
 Duct work (the total length of the duct system, including straight duct, elbows, transitions, and wall or roof caps must not exceed 140 feet.)
 Roof cap
 Duct tape to seal all joints
 Caulking to seal the exterior roof opening around the cap

Wall venting
 Duct work (the total length of the duct system, including straight duct, elbows, transitions, and wall or roof caps must not exceed 140 feet.)
 Wall cap
 Duct tape to seal all joints
 Caulking to seal the exterior wall opening around the cap

Replacement charcoal filter

LG OTRs include 1 charcoal filter for room venting installations (recirculating). It is recommended to change the filter every 6-12 months. Order an extra filter now to keep on-hand.



Optional purchase

Replacement charcoal filter – 5230W1A003A


Replacement charcoal filter – 5230W1A003A

Replacement charcoal filter – 5230W1A011E

Part TBD

Replacement grease filter

LG OTRs include 2 exhaust grease filters. Clean at least monthly. Replace if necessary.



Optional purchase

Replacement grease filter – 5230W1A012G

Replacement grease filter – 5230W1A012E

Replacement grease filter – 5230W1A012E

Replacement grease filter – MDJ66349401

Watch OTR microwave oven installation



Accessories can be purchased in-store with unit, or from LG Parts & Accessories:

Shop online at LGCANADAPARTS.COM

Call 1-855-341-2732



LG hood fan accessory guide



LSHD3680ST



LSHD308__(0ST,9BD,0N)

Electrical requirements

LG hood fans require a 120 V, 60 Hz, properly grounded dedicated circuit protected by a 15 or 20 Amp circuit breaker.

These hood fans must be hard wired (direct wired) into an approved junction box. A plug and receptacle is not permitted on these products.

A cable locking connector (not supplied) might also be required by local codes. Check with local requirements and codes, and purchase and install appropriate connector if necessary.



Required purchase

3-Wire circuit connection (2-wire with ground)
(Must be installed by a holder of a valid electrical certificate and must abide by local codes)

Venting requirements


LG hoods must be properly vented in one of three ways. Do not vent into a wall cavity, attic or unused area. Venting ductwork is not provided and should be purchased separately. Use metal ductwork only. For best performance, use round ducts (6" min.) instead of rectangular, especially when elbows are required.

1. Roof venting
2. Wall venting
3. Room venting (recirculating)

Required purchase

Duct work (the total length of the duct system, including straight duct, elbows, transitions, and wall or roof caps must not exceed 100 equivalent feet.)
Roof or wall cap
Duct tape to seal all joints
Caulking to seal the exterior roof opening around the cap

Telescopic duct covers




Included

1 Upper and 1 lower duct cover included
LG hoods are designed for a max. ceiling height of 9 ft. 10 in. A duct cover extensions required for taller ceilings.

Recirculation kit & replacement charcoal filter

A recirculation kit is required when venting into a room instead of outside. It is recommended to change the charcoal filter every 6-12 months. Order an extra filter now to keep on-hand.



Optional purchase

Recirculation kit – ZRC-01AN
Replacement charcoal filter – ZOF-C091

Duct cover extension

Can be used for ceiling heights that are between 9 ft. 10 in. and 12 ft.



Optional purchase

12 ft. duct cover extension for ceiling heights up to 12 ft. – Z1C-00AN
(Duct cover extension is stainless steel and is not compatible with black stainless steel and White Essence models)

Make up air kit














When vent hoods exhaust air out of your home, negative air pressure is created unless the exhausted air is replaced by fresh outdoor air. The make-up air damper is designed to balance the air pressure in your home by automatically opening to allow fresh air in while the hood is operating.



Optional purchase

Make up air kit, 6-in, universal – MUA006A

LG wall oven accessory guide

		Combination				Single			
									
		WCES6428_(F/N)	WCEP6427F	WCEP6423F	WCEP6423F	WSES4728F	WSEP4727F	WSEP4723F	
Electrical requirements LG wall ovens require a 240/208 V, 60 Hz, properly grounded dedicated circuit protected by a properly sized Amp circuit breaker as noted. Wall ovens must be hard wired (direct wired) into an approved junction box. A plug and receptacle is not permitted on these products.		Required purchase	50 Amp circuit breaker with min. #10 AWG (based on 240V) 4-Wire circuit connection (refer to * below for 3-wire connection)			40 Amp circuit breaker with min. #10 AWG (based on 240V) 4-Wire circuit connection (refer to * below for 3-wire connection)			
	(All electrical to be installed by a holder of a valid electrical certificate and must abide by local codes)								
		Required purchase	Junction box						
		Required purchase	Conduit connector						
		Required purchase	Wire nuts for 8 gauge wiring				Wire nuts for 10 gauge wiring		
Installation parts		Required purchase	36" of string						
		Optional purchase	Wood shims (it may be necessary to add wood shims during the installation process to adjust the wall oven within the opening)						

*A 4-wire connection is required for all mobile and manufactured home installations, as well as all new construction after January 1, 1996. A 3-wire connection is possible where local code permits.



Accessories can be purchased in-store with unit, or from LG Parts & Accessories:

Shop online at LGCANADAPARTS.COM

Call 1-855-341-2732

LG gas cooktop accessory guide














CBGJ3027S



CBGJ3023S

<p>Electrical requirements</p> <p>LG gas cooktops have a 3-prong power cord attached to the unit.</p>		<p>Included</p>	<p>3-Prong power cord included</p>
<p>Installation parts required for gas hookup</p>		<p>Required purchase</p>	<p>Power cord connects to a 120 V, 60 Hz, properly grounded dedicated circuit protected by a 15 or 20 Amp circuit breaker, or a time delay fuse is required (Outlet must be installed by a holder of a valid electrical certificate and must abide by local codes)</p> <p>Gas line shut-off valve Teflon tape or a thread compound Pipe fittings Joint sealant Flexible metal appliance connector (5/8" I.D.) Flare union adapter for connection to gas supply line (3/4" or 1/2" NPT x 5/8" I.D.) Flare union adapter for connection to pressure regulator on cooktop (1/4" NPT x 1/2" I.D.) (Must be installed by a holder of a certified gas technician and abide by local gas codes)</p>
<p>LP conversion kit</p> <p>If your home uses liquid propane (LP) instead of natural gas (NG), utilize the LP conversion kit.</p>		<p>Included</p>	<p>LP conversion kit included</p>

LG electric/induction cooktop accessory guide

			36 inch	30 inch						
										
			CBIS3618BE	CBIS3018BE	CBIH3017BE	LSCE305ST	CBEW3017BE	CBEW3013BE	CBIH3013BE	
Electrical requirements LG electric cooktops require a 240/208 V, 60 Hz, properly grounded dedicated circuit protected by a properly sized Amp circuit breaker as noted. A 4-wire conduit connection or power cord should be used.*		Required purchase	50 Amp circuit breaker with min. #8 AWG 4-Wire circuit connection (refer to * below for 3-wire connection)	40 Amp circuit breaker with min. #8 AWG 4-Wire circuit connection (refer to * below for 3-wire connection)				30 Amp circuit breaker with min. #8 AWG 4-Wire circuit connection (refer to * below for 3-wire connection)	30 Amp circuit breaker with min. #10 AWG 4-Wire circuit connection (refer to * below for 3-wire connection)	
	(All electrical to be installed by a holder of a valid electrical certificate and must abide by local codes)									
		Required purchase	Strain relief							
		Required purchase	Junction box							
		Required purchase	Wire nuts for 8 gauge wiring							

*A 4-wire connection is required for all mobile and manufactured home installations, as well as all new construction after January 1, 1996. A 3-wire connection is possible where local code permits.



Accessories can be purchased in-store with unit, or from LG Parts & Accessories:

Shop online at LGCANADAPARTS.COM

Call 1-855-341-2732