NK30CB700W

30" Range Hood

SAMSUNG

Signature Features

Triple Air Sensor

• The Triple Air Sensor detects air quality and turns on or adjusts power levels to improve it.*

*In the event installation using recirculation kit impacts ventilation performance and Triple Air Sensor, opening a window to ventilate is recommended. Recirculation kit sold separately.

Powerful Performance and Low Noise

• Powerful 630 CFM* ventilation circulates air to remove odors quickly, operating at 6.0 sones on Boost fan speed setting.

*When using Boost mode. Hood arrives pre-programmed to 390 CFM.

Wi-Fi Connectivity

• Control your hood by smartphone through the SmartThings App. Once your cooktop burner is powered on, the hood turns on.*

*Compatible when connected with Wi-Fi enabled built-in cooktops and ranges. Available when it is set using the "Automations" option in the SmartThings App.

Available Colors

Clean Grey Panel/
Stainless Steel Duct (shown)

Clean White Panel/
Stainless Steel Duct

Arriving Summer 2023
Clean Deep Charcoal Panel/
Black Stainless Steel Duct

Clean White Panel/
Stainless Steel Duct

Clean Deep Charcoal Panel/
Black Stainless Steel Duct
Arriving Summer 2023

Features

• Triple Air Sensor
• 50 dBA (1.0 Sone) in Low Mode / 69 dBA (6.0 Sones) in Boost Mode
• 4 Fan Speeds, Including Booster
• LCD Display/Touch Controls
• Wall-Mount Chimney-Style Hood
• Exterior Venting & Recirculating Capabilities
• Optional Recirculation Kit Available
• Optional Extension Kit Available
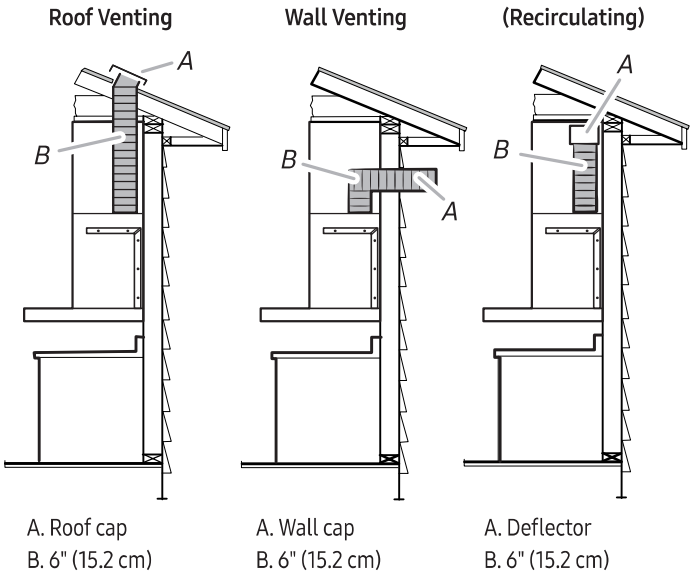• Optional Recirculation Filter Available

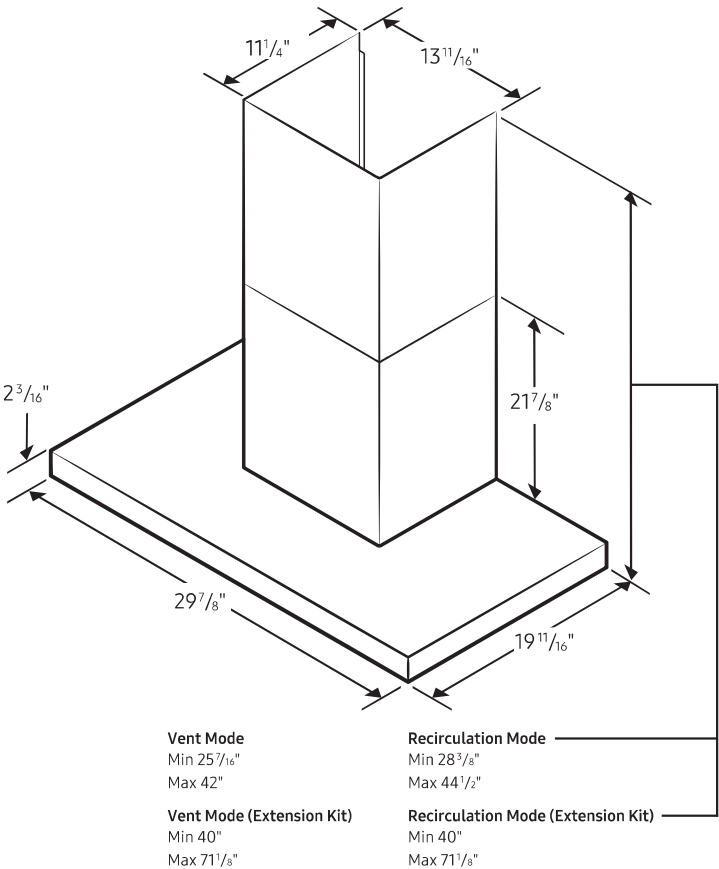## Convenience

• LED Bar Lighting
• Easy-to-Clean Baffle Filters

ADA Compliant

NK30CB700W

30" Range Hood

SAMSUNG

Venting Methods

Roof Venting

A. Roof cap
B. 6" (15.2 cm)

Wall Venting

A. Wall cap
B. 6" (15.2 cm)

(Recirculating)

A. Deflector
B. 6" (15.2 cm)

Dimensions and Clearance

11 1/4"
13 11/16"
2 3/16"
21 7/8"
29 7/8"
19 11/16"

Vent Mode
Min 25 7/16"
Max 42"

Recirculation Mode
Min 28 3/8"
Max 44 1/2"

Vent Mode (Extension Kit)
Min 40"
Max 71 1/8"

Recirculation Mode (Extension Kit)
Min 40"
Max 71 1/8"

Total Power
210W

Power Source
120V / 60 Hz / 15A

Range Hood
- 30" Wall-Mount Chimney-Style Hood
- Vent Fan: 630 CFM (Hood arrives pre-programmed to 390 CFM)
- 50 dBA (1.0 Sone) in Low Mode / 69 dBA (6.0 Sones) in Boost Mode
- 4 Fan Speeds, Including Booster
- LCD Display/Touch Controls
- SmartThings App Automation: Cooktop/Range Connectivity, Lighting On/Off, Fan Speed
- Mobile Monitoring: Fan Speed, Lighting On/Off, Power Control
- Voice Control: Bixby/Google Assistant/Amazon Alexa
- Removable Baffle Filters (Dishwasher safe)
- LED Bar Lighting

Warranty
Two (2) Years Parts and Labor*
*Effective for purchases made between 3/1/23 - 9/30/23; proof of purchase required.

Product Dimensions & Weight (WxHxD)
Outside (Max) Hood Dimensions:
29 7/8" x 25 7/16" x 19 11/16"
Weight: 35.7 lbs

Shipping Dimensions & Weight (WxHxD)
Dimensions:
33 3/16" x 25 25/32" x 19 11/16"
Weight: 59.5 lbs

Color	Model #	UPC Code
Clean White Panel/ Stainless Steel Duct	NK30CB700W12AA	887276724201
Clean Grey Panel/ Stainless Steel Duct	NK30CB700WCGAA	887276724225
Clean Deep Charcoal Panel/Black Stainless Steel Duct	NK30CB700W33AA	887276724218

Optional Accessories

Stainless Steel Hood Extension Kit	NK-AE7000WS	887276749662
Black Stainless Steel Hood Extension Kit	NK-AE7000WG	887276749655
Recirculation Kit	NK-AR7000WB	887276749686
Recirculation Filter	NK-AF7000WB	887276749679