

24" Marvel Professional Beverage Refrigerator with MaxStore™ Utility Bin

Model #MP24BR****

- Dynamic Cooling Technology™ delivers rapid cooldown and the industry's best temperature stability
- Slide out convertible shelf—beverage storage or wine rack configurations with stainless shelf front
- Professional styling: framed stainless steel door, sturdy full-length handle, sleek stainless shelf fronts and 4" stainless steel toe kick
- MARVEL Intuit™ Integrated Controls provide precise temperature management from 34°F to 42°F
- Two-stage, soft blue theatre-style LED lighting and sophisticated midnight black interior
- MaxStore™ smooth-glide clear utility bin provides maximum volume to effectively store large, bulky or loose items
- Thermal-efficient cabinet ensures optimum food preservation and energy efficiency while maximizing capacity
- Tinted, UV-resistant dual pane glass door protects wine from damaging ultra-violet light
- Audible and visual alarms signal when door is left ajar to protect food integrity
- Vacation/Sabbath mode conserves energy during times when the unit is not in use and complies with Star-K requirements
- Door lock to protect your contents
- Height adjustment up to 1" with leveling legs
- 3-year warranty



Storage Capacity

Up to 20 wine bottles total (7 flat)
Up to (162) 12-oz cans

Storage Configuration

- (1) full-width and roll out
- (1) half-width cantilevered, fully adjustable black powder coated steel-framed glass shelf
- (1) fixed black steel-framed glass shelf
- (1) MaxStore™ Utility Bin

Product Dimensions

23⁷/₈" W x 33³/₄" minimum H x 25 ⁵/₈" D (including handle)

Finish/Door Options



Stainless Steel




Wood Overlay
(Panel Ready)


Ordering Details

| | |
|--|------------|
| Stainless Frame, Glass Door With Lock, Integrated Right Hinge | MP24BRG3RS |
| Stainless Frame, Glass Door With Lock, Integrated Left Hinge | MP24BRG3LS |
| Panel Overlay Frame Ready Glass Door with lock, Integrated Right Hinge | MP24BRF3RP |
| Panel Overlay Frame Ready Glass Door with lock, Integrated Left Hinge | MP24BRF3LP |




No panel installation kit required.

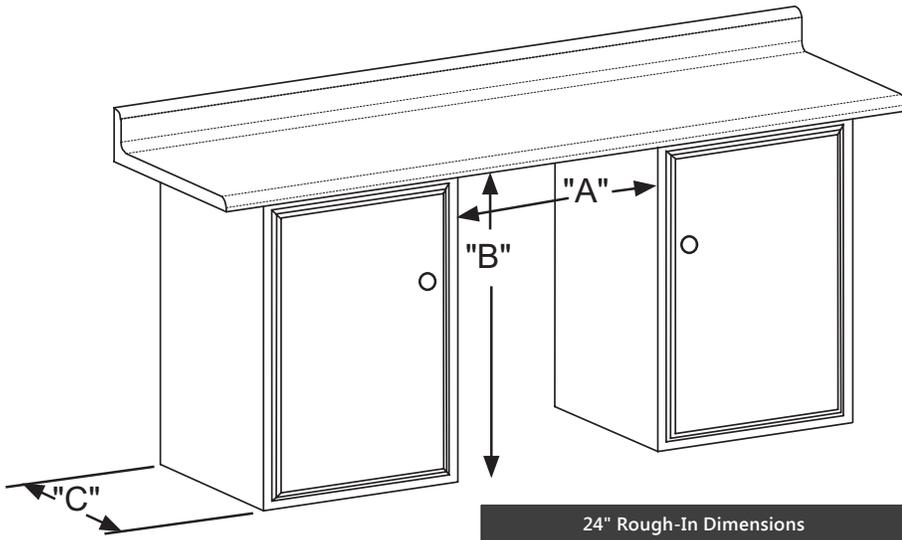

| 24" Rough-In Dimensions | | |
|-------------------------|------------------------------------|----------------|
| "A" | "B" | "C" |
| 24" (61 cm) | 34" to 35" (86.4 cm to 88.9 cm) | 24" (61 cm) |

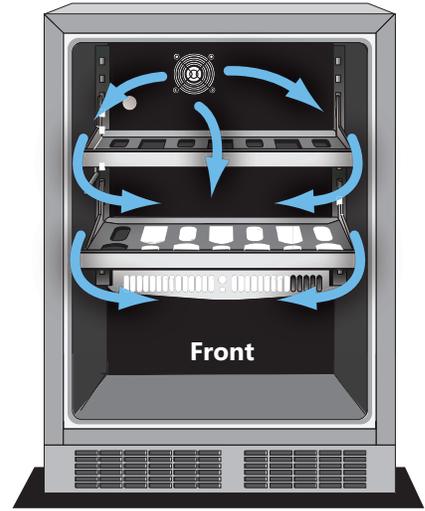

| Cabinet Dimensions | | |
|-----------------------|---|------------------------|
| "D" | "E" | "F" |
| 23 7/8" (60.7 cm) | 33 3/4" to 34 3/4" (85.7 to 88.3 cm) | 23 23/32" (60.2 cm) |
| "G" | "H" | "J" |
| 26 7/32" (66.6 cm) | 46 1/32" (117.9 cm) | 26 7/16" (67.2 cm) |

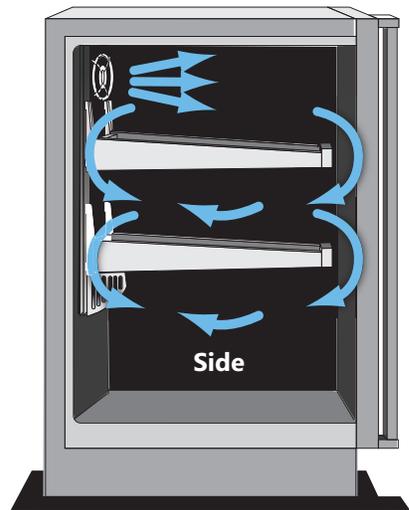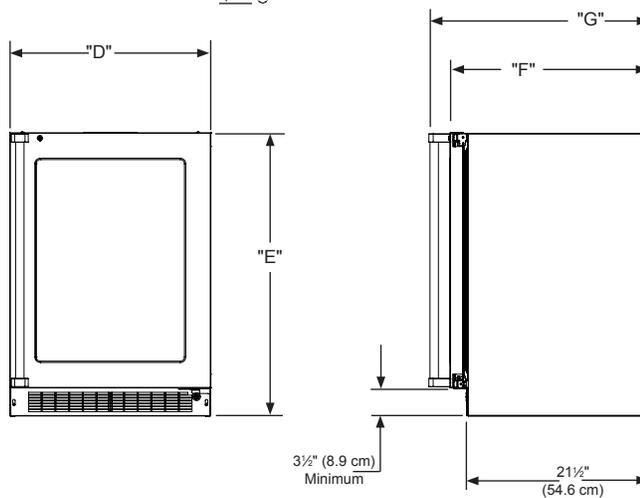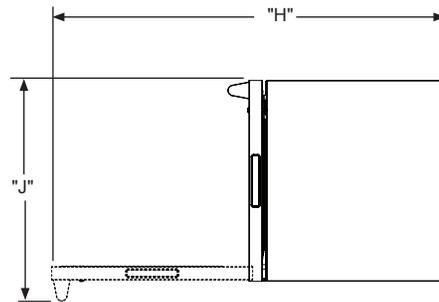

Dynamic Cooling Technology™ delivers rapid cool down and the industry's best temperature stability

The distinctive Marvel design features a thermal-efficient cabinet and door combined with Dynamic Cooling Technology™ for superior temperature stability, faster cooling times and speedy temperature recovery even with high frequency.

| | |
|--------------------------|---|
| Width | 23 7/8" |
| Interior Finish | Black |
| Capacity | Up to 20 wine bottles Up to 162 12-oz cans |
| Shelving System | Side Mount Bottle shape wire |
| Shelf Fronts | Stainless Steel |
| Other Storage | MaxStore™ Utility Bin |
| Interior Lighting | 2 LED Pods |
| Toe Grill Finish | Stainless Steel |
| Hinge | Soft Close Integrated Hinge |
| Handle | Professional |







| | |
|--------------------------------|-----------------------------------|
| Control Type | Intuit™ |
| Temperature Range | 34° - 42° F |
| Lock | Yes |
| Electrical Requirements | 120V / 60Hz / 15A |
| Length of Power Cord | 5' |
| Product Dimensions | 23 7/8" W x 33 3/4" H x 21 1/2" D |
| Depth to Front of Door | 23 23/32" |
| Depth to Handle | 26 7/32" |
| Depth with door at 90° | 46 13/32" |
| Shipping Weight | 160 lbs |

| | |
|--------------------------------|-------|
| Finishes | SS, O |
| Vacation / Sabbath Mode | Yes |
| Agency Approvals | CSA |

Finishes Key

SS = Stainless Steel
O = Overlay


Overlay Panels

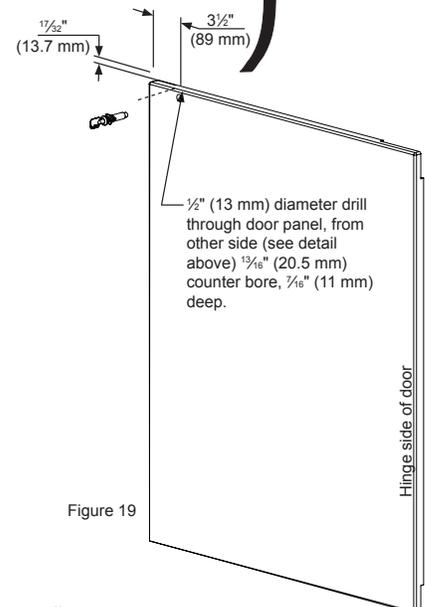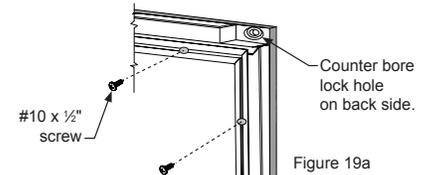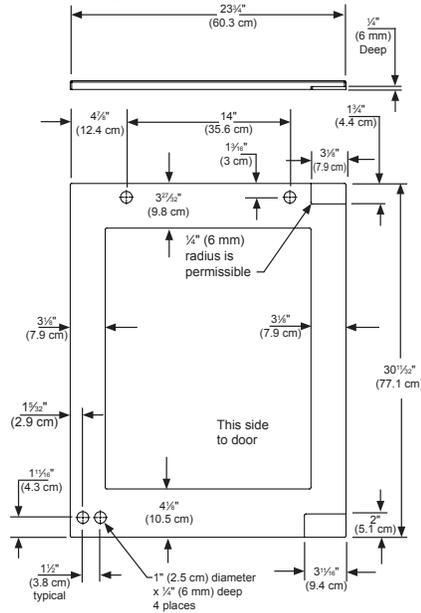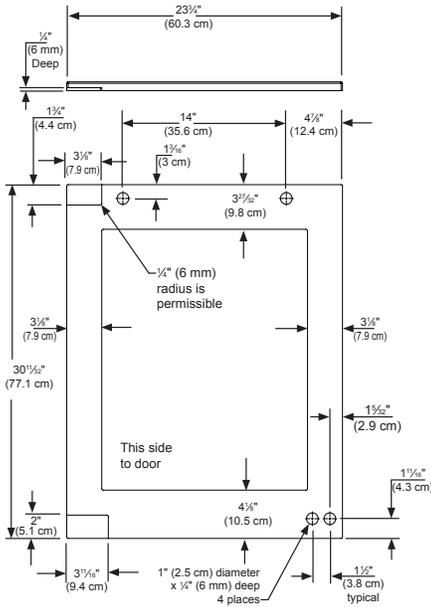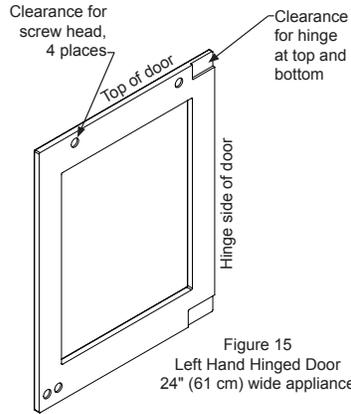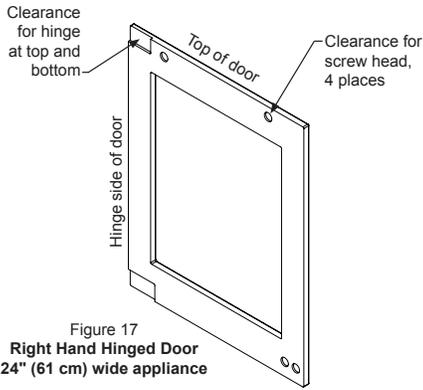

| Material Type | #10 Wood Screw |
|---------------|-------------------------------------|
| Hardwood | 1/8" (3.2 mm) Diameter. Pilot Hole |
| Softwood | 1/64" (2.8 mm) Diameter. Pilot Hole |

Table C

The preferred method of attaching the panel to the door is to clamp the panel to the door so it cannot move while drilling the screw pilot holes. Use bar clamps or "C" clamps with pads on the clamping surfaces that will not mar the panel or the door. The custom overlay panel should be flush with the top of the door and centered along the width of the door. See Figure 10a. Drill holes through the gasket extrusion using the 10 holes as pilot holes. Use the drill size from the chart in Table "C", being careful not to drill through the front surface of the panel, drill no deeper than 1/2" (12.7 mm) deep. If the overlay panel is thinner than 5/8" (16 mm) thick shorter screws will have to be obtained. Fasten the panel to the door with the 10 screws provided in the literature pack. (See Figure 19a). Remove the clamps and replace the gasket in the gasket extrusion channels of the door. Some force may be required to seat the gasket into the channels. Be sure the gasket corners are seated properly.

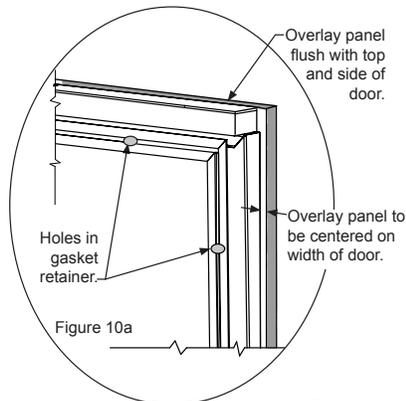

For comprehensive installation instructions, please visit www.marvelrefrigeration.com