


ELEGANCE AND PERFORMANCE

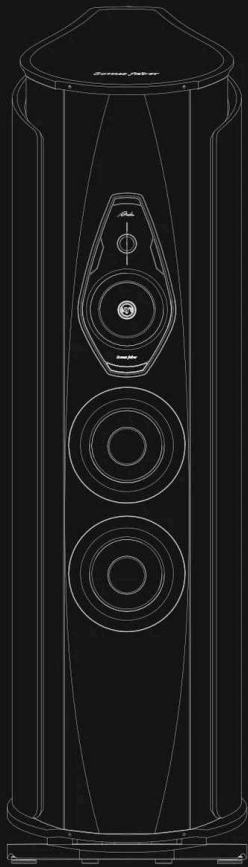

System

3 and 2/3 way, Sound field Shaper
technology, Zero

Vibration Transmission™ technology, para-
aperiodic

vented box “Stealth Ultraflex System™” and
staggered low

frequency floor standing loudspeaker system

Loudspeakers	Tw: Ø 28 mm, H28 XTR-04, High Power Neodymium, Extended Range Soft Dome, DAD™ Arrow Point. Md: Ø 180 mm, M18 XTR-04 Neodymium Magnet System, W: Ø 2x220 mm W22XTR-12, Sw: Ø 320 mm SW32XTR-08. SOUND FIELD SHAPER: Tw: Ø 29 mm, 29XTR2, DAD™ Arrow Point. Md: Ø 2x80 mm, M8XTR.
Crossover Points	55, 150, 200, 3000 Hz Premium High-End components
Frequency response	18 Hz – 35000 Hz
Sensitivity	92 db SPL (2.83 V/1 m)
Nominal impedance	4 Ohm
Recommended power amplifier	100-1000 W
Connectivity	6 connectors binding post: Mid-Hi, Low, Sub
Decoupling Systems	ZVT

Product dimensions (HxWxD)	1725 x 482 x 780 mm / each 68 x 19 x 31 in / each
Dimensions with packaging (HxWxD)	1930 x 740 x 1170 mm / each 76 x 29.1 x 46.1 in / each
Weight	165 kg / each 363.8 lb / each
Packaging weight	275 kg / each 606.3 lb / each
Cabinet	Double curvature - Lute shape High gloss wood Black leather Aluminum
Sound field shapers	Tweeter (Tw): 29XTR2 DAD Arrow Point, Ø 29 mm Mid-range driver (Md): 2 x M8XTR, Ø 80 mm