


The slim curves of Mantra are the perfect complement to today's modern kitchens. Advanced features like powerful ventilation, LED lighting and hidden controls make operation enjoyable.

| SIZE   | WHITE     | BLACK     | BLACK STAINLESS | STAINLESS | GREASE FILTERS (replacement) | NON-DUCTED FILTERS |
|--------|-----------|-----------|-----------------|-----------|------------------------------|--------------------|
| 30 in. | MTR1303WW | MTR1303BL | MTR1301BLS      | MTR1303SS | HPFAMM30                     | HPF30              |

| FEATURES   |                                    |
|--|------------------------------------|
| Max. Blower CFM ‡  | 350 CFM                            |
| Control type   | 2-speed Rocker Switch              |
| Delay off  | no                                 |
| Filter Clean Reminder  | no                                 |
| ADA Capable  | yes                                |
| Lighting   | 1-level 5 W LED GU10 (included)    |
| Grease Filters   | Micro Mesh (Qty. 2)                |
| Installation Hardware  | EZ1 Bracket                        |
| ENERGY STAR®   | yes                                |
| Recirculation  | Non-ducted filters sold separately |
| AC INPUT   |                                    |
| 120 V, 60 Hz - 0.8 AMPS  |                                    |
| Electrical Connection: Direct Wire                                 |                                    |
| OPTIONAL ACCESSORIES   |                                    |
| 7-in. Round Damper   | BP87Q                              |
| ADA Wiring Kit   | HAWSK3                             |
| Make-up Air Dampers  | MD6TU, MD8TU and MD10TU            |
| Power Cord Kit   | HCK44                              |
| MOUNTING HEIGHT  |                                    |
| Minimum 18 in. from cooktop to bottom of hood for electrical range |                                    |
| Minimum 26 in. from cooktop to bottom of hood for gas range        |                                    |
| LIMITED WARRANTY   |                                    |

‡ Max. blower CFM indicates the performance of the hood blower in open air and is not HVI certified..

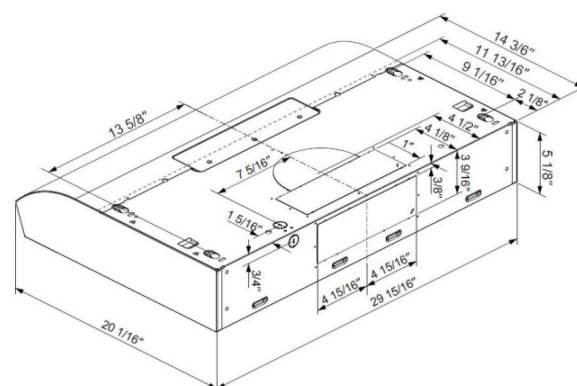


Dimensions shown in inches.



| HVI PERFORMANCE          |             |                   |       |      |     |                       |                      |
|--------------------------|-------------|-------------------|-------|------|-----|-----------------------|----------------------|
| Duct Orientation         | Size        | Damper            | Sones |      | CFM |                       |                      |
|                          |             |                   | Low   | High | Low | High<br>0.25 in. w.g. | High<br>0.1 in. w.g. |
| Vertical - Rectangular   | 3¼ x 10 in. | Included          | 1.5   | 6.5  | 130 | 160                   | 240                  |
| Horizontal - Rectangular | 3¼ x 10 in. | Included          | 2.0   | 7.0  | 110 | 160                   | 240                  |
| Round - Vertical         | 7 in.       | Sold Separately** | 2.0   | 6.0  | 150 | 140                   | 250                  |

\*\* 7 in. adaptor plate included

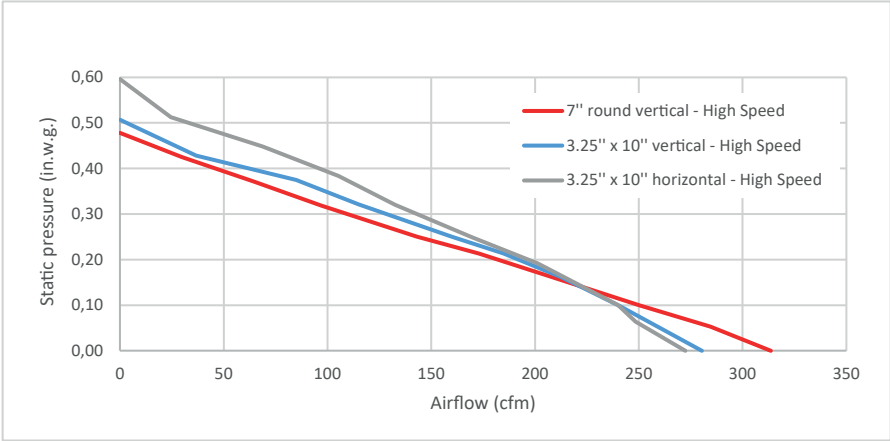

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 and 0.25 in. static pressure at high speed based on tests conducted in an HVI-approved state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

\* Where noted performance rating is not HVI certified but was established in accordance with HVI Standardized test procedure.