## CONSERVATO



18.3 Cu. Ft. Top Freezer Refrigerator


Top Freezer Refrigerator

Available Products: GRE1834VB, GRE1834VV, GRE1834VW

Available Colors: Black, Stainless Steel, White

## GRE1834VW - B - S

	Produ ——	ct Specifications	
Refrigerator		Freezer	
Air Filter Ready	Yes	Automatic Defrost	Yes
Crisper Color	Clear	Baskets / Bins Color	White
Deli Drawer	Yes	Shelf Material	Glass
Door Bin Color	White	Number of Fixed Door Bins	2
Humidity Controls	Automatic	Number of Adjustable Shelves	1
Interior Lighting	LED		
Shelf Material	Glass	Controls	
Number of Fixed Gallon Door Bins	2	Digital Display	No
Number of Adjustable Shelves	2	Digital Display	110
Number of Crispers	2	Dimensions and Volume	
•		Height With Hinge	66 3/8"
Ice Maker		Height Without Hinge	65 7/8"
Ice Maker	No	Width	30"
Ice Maker Ready	Yes	Width of Cabinet	30"
		Depth of Cabinet	26 5/8"
Exterior		Depth With Door	30 3/8"
Door Swing	Reversible	Depth With Door 90° Open	57"
Door Swing	reversione	Depth With Door and Handle	30 3/8"
<b>Electrical Specifications</b>		Freezer Capacity	4.9 Cu. Ft.
Minimum Circuit Required	15 Amps	Fresh Food Capacity	13.4 Cu. Ft.
William Circuit Required	137 Hilps	Total Capacity	18.3 Cu. Ft.
Cartifications and Approvals			
Certifications and Approvals	Yes	General Specifications	
ADA Compliant	ies	Annual Energy	410 kWh
C-C-t- C-t-C-t-C-t-		Refrigerant Type	R-600A
Safety Certifications and Approvals	3.7	Warranty - Labor	1 Year
UL Listed	Yes	Warranty - Parts	1 Year
		Performance Certifications and Approvals ENERGY STAR Certified	No
		ENERGT STAR CEITHER	INU






18.3 Cu. Ft. Top Freezer Refrigerator

Available Products: GRE1834VB, GRE1834VS,
GRE1834VW

Top Freezer Refrigerator


Available Colors: Black, Stainless Steel, White

**Installation Diagram** 

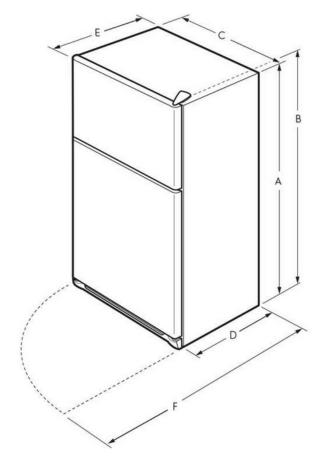

Version: 09/23

Α	65 <sup>7</sup> / <sub>8</sub> "
В	66 <sup>3</sup> /8"
С	30"
D	26 <sup>5</sup> / <sub>8</sub> "
Ε	30 <sup>3</sup> / <sub>8</sub> "
F	57"

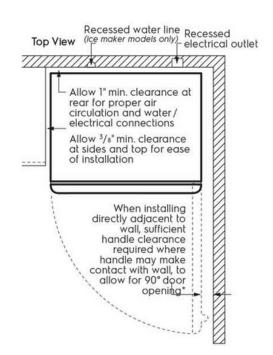

\* When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 140° door swing, providing complete crisper access and removal. (Absolute 3" minimum clearance will ONLY allow for 90° door swing which will provide limited crisper access with restricted removal.)