



Special Notes: LED lights. WL-1 warming lights are available on selected models.


| WIDTH: | 48" | | | |
|-----------|-----|--|--|--|
| DEPTH: | 21" | | | |
| HEIGHT: | 9" | | | |
| CFM: | 300 | | | |
| SONES: | 5.4 | | | |
| AMPS: | 2.5 | | | |
| # LIGHTS: | 3 | | | |

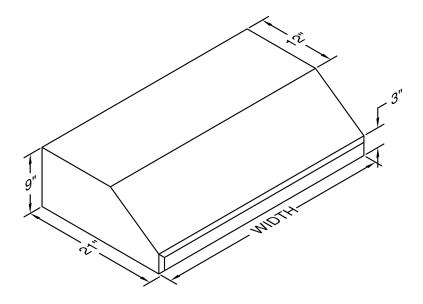

CONNECTION DIAGRAM

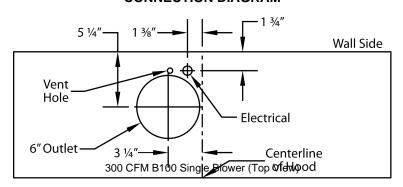

REC. MOUNTING HEIGHT*



* Exceeding recommended mounting height may compromise performance.

ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT

| ELECTRICAL MICAL OF ECH TOATIONS TOR SECTION OF THE CONTROL OF THE | | | | | | | | | | | | |
|--|-------------|-------|-------|----|------|-------------|-------------|-------------|-------------|-------------|-------------------------|--------|
| | MODEL | VOLTS | AMPS+ | HZ | RPM | CFM SP@0.0" | EQUIV CFM\$ | CFM SP@0.1" | CFM SP@0.2" | CFM SP@0.3" | MIN. ROUND DUCT SIZE | SONES# |
| | B100 Single | 115 | 2.5 | 60 | 1550 | 300 | 450 | 273 | 245 | 225 | 6" (28 sq. in.) | 5.4 |

⁺ Add 2.5 amps for each warming light. This model is equipped with LED lighting: (2 lights: 30" - 41", 3 lights: 42" - 48").

[#] Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.



^{\$} Because the Magic Lung blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung with other blower units made by other manufacturers, use the "Equivalent CFM".