



## Product and Cut-out Dimensions Convection Microwave Oven H 4044 BM

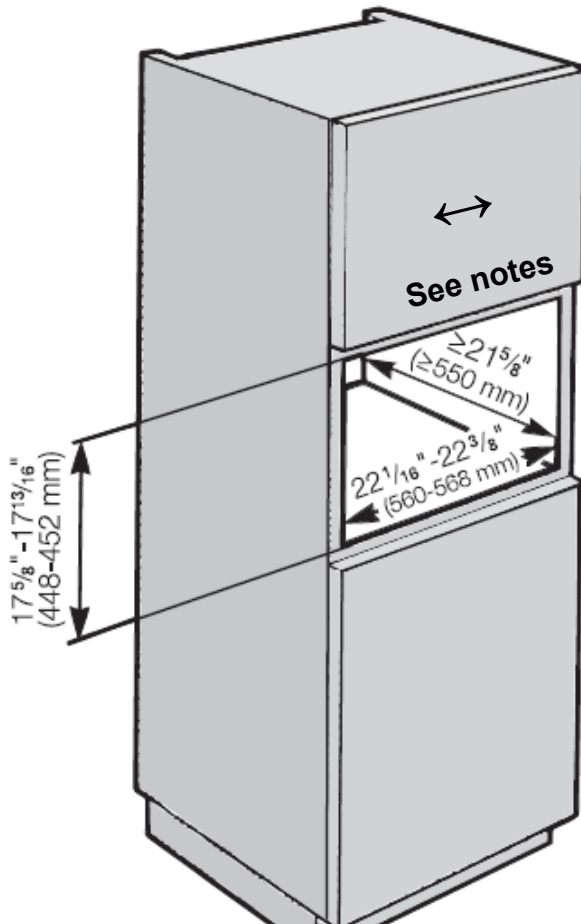

Miele appliances can be installed flush or proud. Discuss your installation requirements with your architect, designer and installer.

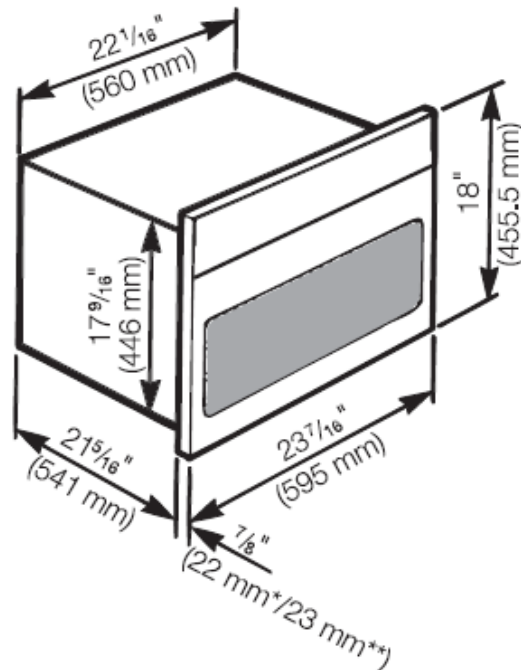

### Location Codes

E – The oven comes equipped with a 7.2 ft. (2.2 m) power cord with a NEMA 14-30 P molded plug ready for connection to a:  
120/240V, 20 A, 60 Hz power supply  
or  
120/208V, 20 A, 60 Hz power supply.

O – 2 1/2" <sup>2</sup> minimum hole size for plug. Outlet to be installed in adjacent cabinetry

### Notes

Width with optional EBA Trim Kits:  
22996178USA **EBA 5470** 26" – 26 1/4"  
22996179USA **EBA 5476** 28 3/4" – 28 1/2"

All installations must be done in accordance with local codes.

\* Appliances with glass front

\*\* Appliances with metal front

Please view page 4


**Note: Drawing is not to scale**

**Specification Sheets OJS 09192011**

## Product and Cut-out Dimensions Convection Microwave Oven H 4044 BM

When installed under a cooktop regard the installation instructions and dimensions of the cooktop

Miele appliances can be installed flush or proud. Discuss your installation requirements with your architect, designer and installer.

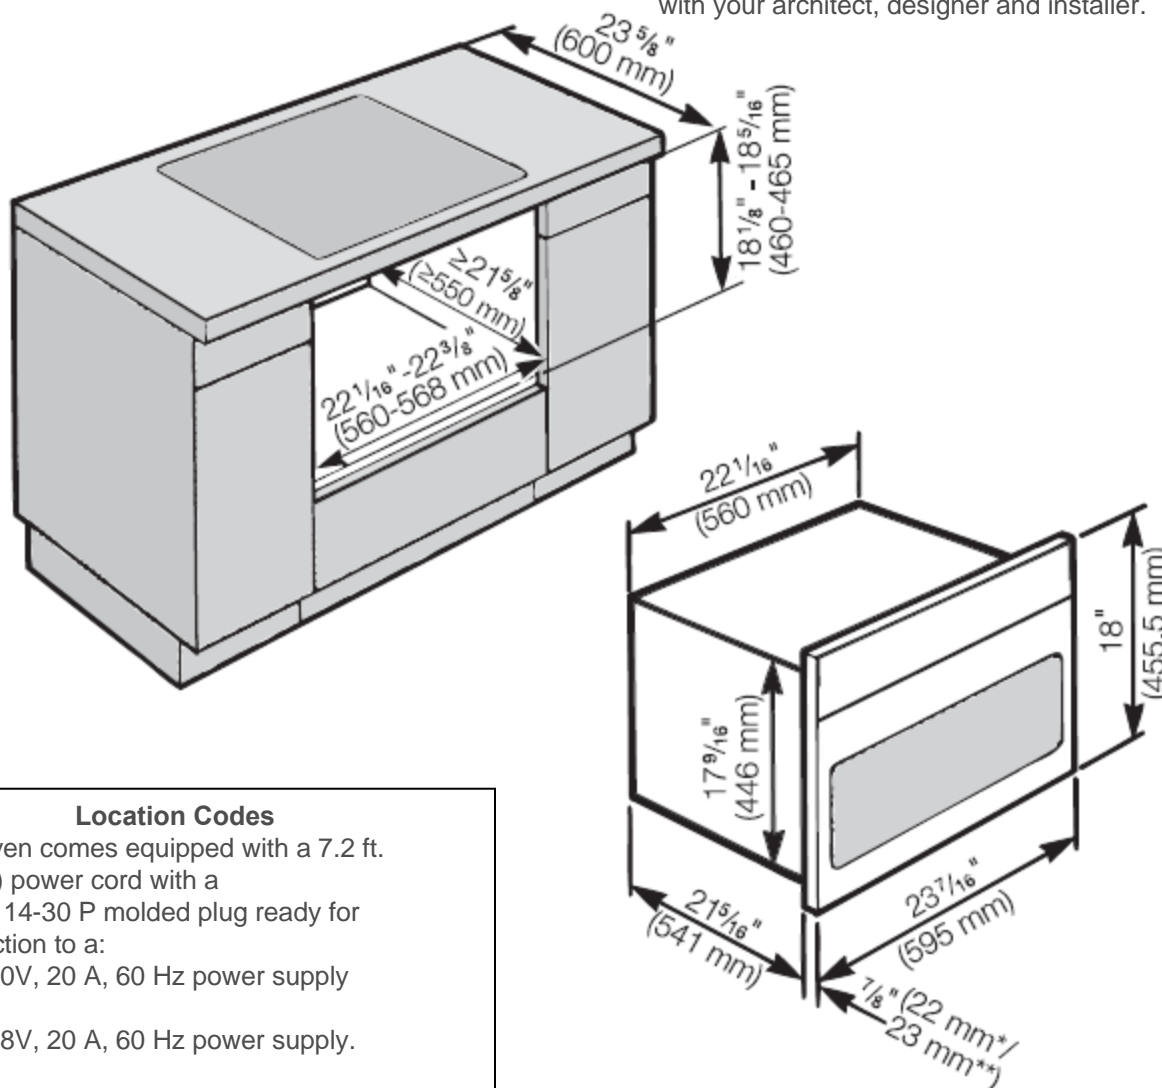

### Location Codes

E – The oven comes equipped with a 7.2 ft. (2.2 m) power cord with a NEMA 14-30 P molded plug ready for connection to a:  
120/240V, 20 A, 60 Hz power supply  
or  
120/208V, 20 A, 60 Hz power supply.

O –  $2\frac{1}{2}"^2$  minimum hole size for plug. Outlet to be installed in adjacent cabinetry

### Notes

Width with optional EBA Trim Kits:  
22996178USA **EBA 5470** 26" – 26  $\frac{1}{4}"$   
22996179USA **EBA 5476** 28  $\frac{3}{4}"$  – 28  $\frac{1}{2}"$   
All installations must be done in accordance with local codes.

\* Appliances with glass front

\*\* Appliances with metal front

Please view page 4

**Note: Drawing is not to scale**




**Specification Sheets OJS 09192011**

# Product and Cut-out Dimensions

## Convection Microwave Oven

### H 4044 BM

Page 3 of 4

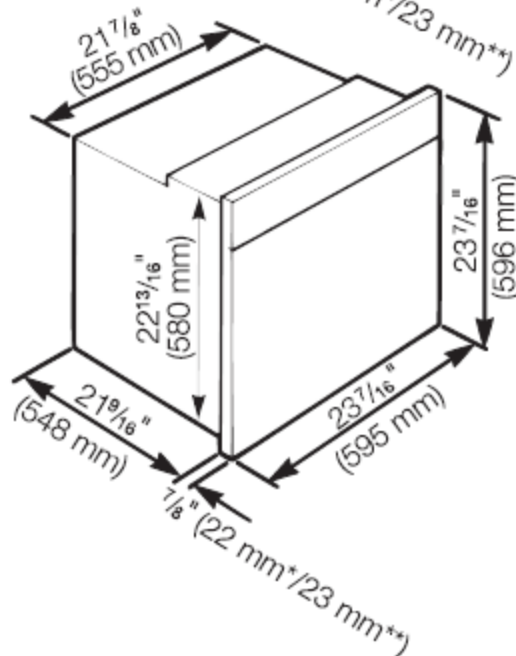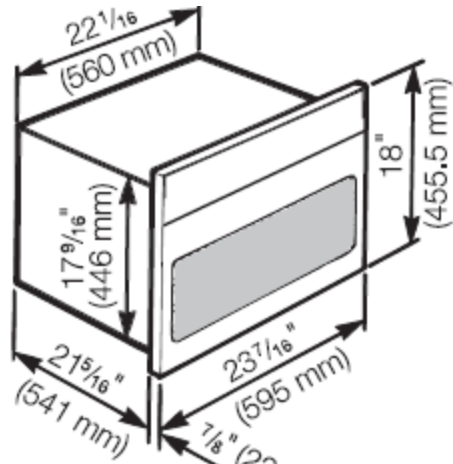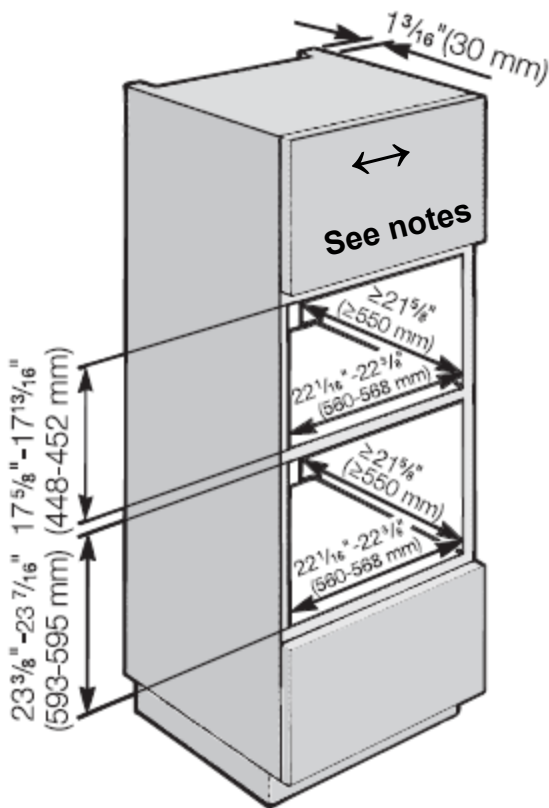

## Location Codes

E – The oven comes equipped with a 7.2 ft. (2.2 m) power cord with a NEMA 14-30 P molded plug ready for connection to a:

120/240V, 20 A, 60 Hz power supply  
or

120/208V, 20 A, 60 Hz power supply.

O – 2 ½" <sup>2</sup> minimum hole size for plug. Outlet to be installed in adjacent cabinetry

## Notes

Width with optional EBA Trim Kits:

22996178USA **EBA 5470** 26" – 26 ¼"

22996179USA **EBA 5476** 28 3/4" – 28 1/2"

All installations must be done in accordance with local codes.

\* Appliances with glass front

\*\* Appliances with metal front

Please view page 4


**Note: Drawing is not to scale**

Specification Sheets OJS 09192011

## Product and Cut-out Dimensions Convection Microwave Oven H 4044 BM

Page 4 of 4

### Machine front dimensions

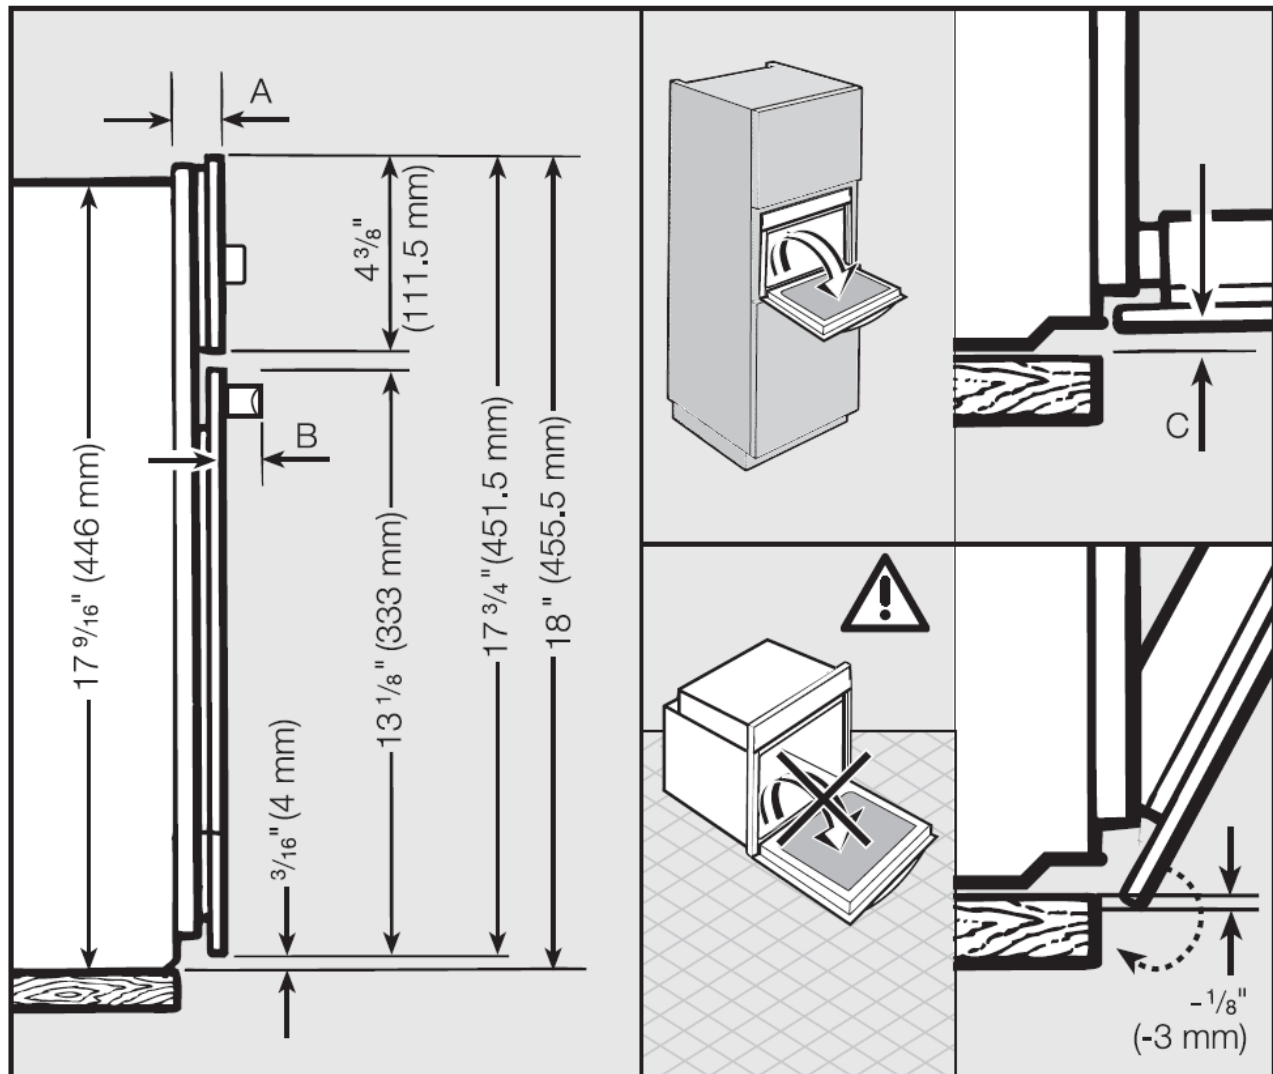

A 7/8" (Appliance with glass front: 22 mm / Appliance with metal front: 23 mm)

B H 4044 BM: 2 3/16" (1.5 mm)

C Appliances with glass front: 1/16" (1.5 mm)

Appliances with metal front: 1/32" (0.5 mm)

Note: Drawing is not to scale

Specification Sheets OJS 09192011