

**SPECIAL ORDER**

**COMMERCIAL THROUGH  
RETAIL (CTR)**



# COIN DROP

## STACKED DRYERS

## AND STACKED WASHER-DRYERS



### Coin Drop

Coin drop payment actuations blend mechanical engineering with convenience. They ensure smooth transactions and efficient machine operation, providing customers with an easy laundry experience and streamlined business operations for owners.

### Stacked Dryers (Tall/Short)


- Two commercial dryers in the space of one, both operating independently, including independent controls for optimum usage
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- Quiet, efficiency blower system

### Stacked Washer-Dryers (Short)


- Washer is ADA compliant
- Combines heavy-duty construction with reliable operation
- The freestanding softmount design can be installed on all floor types or levels



ENERGY STAR®  
Certified Washer

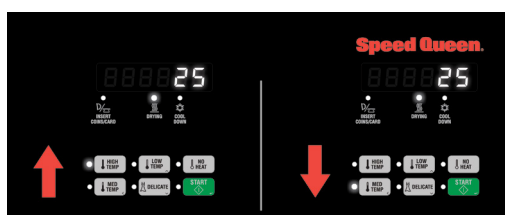

Coin Drop – Stacked Dryer Control Panel

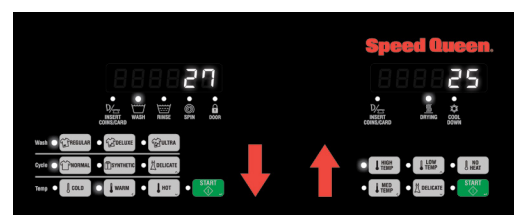

Coin Drop – Stacked Washer-Dryer Control Panel

# COMMERCIAL THROUGH RETAIL

## COIN DROP STACKED DRYERS AND STACKED WASHER-DRYERS



| Product                               | Stacked Dryer                        |                                      |
|---------------------------------------|--------------------------------------|--------------------------------------|
|                                       | Tall                                 | Short                                |
| Color                                 | White                                |                                      |
| Capacity - lb (kg)                    | 18 (8.2) ea                          |                                      |
| Cylinder Volume - cu.ft. (liters)     | 7.0 (198) ea                         |                                      |
| Motor (Thermal Protected) - HP        | 0.33                                 |                                      |
| Type of Gas (Gas Models Only)         | Factory Equipped Natural             |                                      |
| Available Cycles                      | High, Medium, Low, Delicate, No Heat |                                      |
| Air Outlet Diameter - in              | 4                                    |                                      |
| Exhaust Airflow - cfm (liters/sec)    | 220 (105)                            |                                      |
| Electrical Requirements (v/Hz/Ph-Amp) | *Electric                            | 208-240/60/1-30 Amp                  |
|                                       | Gas                                  | 120/60/1-15 Amp                      |
| Heating Element                       | Electric                             | 5350W, 240V / 4750W, 208V            |
|                                       | Gas                                  | 25,000 Btu                           |
| Net Weight - lb (kg)                  | 270 (122)                            |                                      |
| Shipping Weight - lb (kg)             | 280 (127)                            |                                      |
| Shipping Dimensions Approx. - in      | Width                                | 33                                   |
|                                       | Depth                                | 30                                   |
|                                       | Height                               | 80                                   |
| Agency Approvals                      | Electric                             | cULus                                |
|                                       | Gas                                  | cCSAus                               |
| Model No.                             | SSENCAGS176TW01<br>SSGNCAGS116TW01   | SSENCFS176TW01<br>SSGNCFS116TW01     |
| Required Coin Kits (sold separately)  | Coin Box Model #: CK043 (2 required) | Coin Box Model #: CK042 (2 required) |

**Note (not supplied):** Each stacked dryer pocket requires its own power cord and the stacked washer-dryer requires two power cords, one for washer, one for dryer.

### For Commercial Use Only

| Product                                                                                    | Stacked Washer-Dryer                 |                                      |
|--------------------------------------------------------------------------------------------|--------------------------------------|--------------------------------------|
|                                                                                            | Washer                               | Dryer                                |
| Color                                                                                      | White                                |                                      |
| Capacity - lb (kg)                                                                         | 21.5 (9.5)                           | 18 (8.2)                             |
| Cylinder Volume - cu.ft. (liters)                                                          | 3.42 (96.8)                          | 7.0 (198)                            |
| Spin Speed G-Force (RPM)                                                                   | 440 (1200)                           | —                                    |
| Motor Size - HP                                                                            | 0.9                                  | 0.33                                 |
| Type of Gas (Gas Models Only)                                                              | —                                    | Factory Equipped Natural             |
| Water Consumption Per Cycle - g (liter)**                                                  | 13.68 (51.8)                         | —                                    |
| IWF (Water Factor) - gal/ft <sup>3</sup> (liters/liter/cycle)**                            | 4.0 (0.53)                           | —                                    |
| MEF <sub>72</sub> (Modified Energy Factor) ft <sup>3</sup> /kWh/cycle (Liters/kWh/cycle)** | 2.20 (62.3)                          | —                                    |
| Available Cycles                                                                           | Normal, Synthetic, Delicate          | High, Medium, Low, Delicate, No Heat |
| Air Outlet Diameter - in                                                                   | —                                    | 4                                    |
| Exhaust Airflow - cfm (liters/sec)                                                         | —                                    | 220 (105)                            |
| Electrical Requirements (v/Hz/Ph-Amp)                                                      | *Electric                            | 120/60/1-15 Amp                      |
|                                                                                            | Gas                                  | 208-240/60/1-30 Amp                  |
| Heating Element                                                                            | Electric                             | 5350W, 240V<br>4750W, 208V           |
|                                                                                            | Gas                                  | 25,000 Btu                           |
| Net Weight - lb (kg)                                                                       | 385 (175)                            |                                      |
| Shipping Weight - lb (kg)                                                                  | 417 (189)                            |                                      |
| Shipping Dimensions Approx. - in                                                           | Width                                | 34                                   |
|                                                                                            | Depth                                | 30                                   |
|                                                                                            | Height                               | 80                                   |
| Agency Approvals                                                                           | Electric                             | cULus                                |
|                                                                                            | Gas                                  | cCSAus                               |
| Model No.                                                                                  | STENCFS176TW01, STGNCFS116TW01       |                                      |
| Required Coin Kits (sold separately)                                                       | Coin Box Model #: CK042 (2 required) |                                      |

| Dimensions                   | Width - in | Height - in | Depth - in | Floor to Door Opening - in | Door Swing - in |
|------------------------------|------------|-------------|------------|----------------------------|-----------------|
| Stacked Dryer - Tall         | 26.875     | 78.17       | 28         | 15.44                      | 23.5            |
| Stacked Dryer - Short        | 26.875     | 76.5        | 28         | 15.44                      | 23.5            |
| Stacked Washer-Dryer - Short | 26.875     | 76.5        | 27.73      | 14.5***                    | 23.5            |

\* Electric dryers are dual rated for 208-240V applications. Using dryer in 208V will reduce the wattage output. An optional kit (61928) can be used to field convert the unit for 4750 output at 208V.

\*\* Average usage based on multiple load sizes and current DOE test protocol. Real usage will vary depending on load size, composition and cycle selectivity.


\*\*\* For ADA compliance turn legs out from base 0.5 inches

Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

**For additional accessories and warranty, please refer to the price list.**

# PREP FOR CARD

## FRONT LOAD WASHERS AND TOP LOAD WASHERS



### Prep for Card

Prep for card payment actuations involve integrating a secure and robust digital payment platform. This enhances the customer experience, streamlines transactions, and boosts operational efficiency.

### Front Load Washers (*Rear/Front*)



- 440 G-Force extraction speed to maximize moisture removal, reduce dry times and minimize utility costs
- Four-compartment soap dispenser
- Front control washer is ADA compliant

### Top Load Washers

- Touch pad control with sound annunciator
- 27 cycle selections
- Multi-level vend pricing
- Extract speed of 710 RPM spins clothes out drier



ENERGY STAR®  
Certified Washer

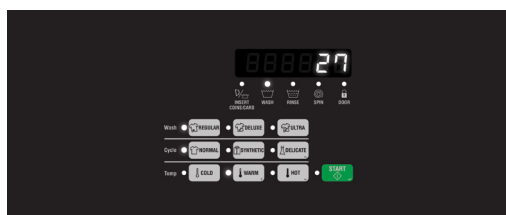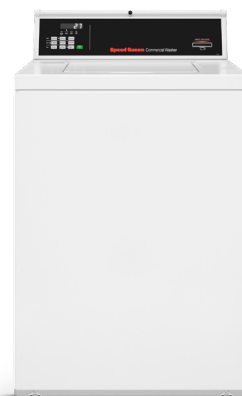

Prep for Card – Front Load Washer Control Panel



Prep for Card – Top Load Washer Control Panel

COMMERCIAL  
THROUGH RETAIL

PREP FOR CARD  
FRONT LOAD  
WASHERS  
AND TOP LOAD  
WASHERS



| Product                                                                      | Front Load Washer             |                 |
|------------------------------------------------------------------------------|-------------------------------|-----------------|
|                                                                              | Rear Control                  | Front Control   |
| Color                                                                        | White                         |                 |
| Capacity - lb (kg)                                                           | 21.5 (9.5)                    |                 |
| Cylinder Volume - cu.ft. (liters)                                            | 3.42 (96.8)                   |                 |
| Spin Speed G-Force (RPM)                                                     | 440 (1200)                    |                 |
| Motor Size - HP (kw)                                                         | 0.9 (0.67)                    |                 |
| Water Consumption Per Cycle - g (liter)*                                     | 13.68 (51.8)                  |                 |
| IWF (Water Factor) - gal/ft³ (liters/liter/cycle)*                           | 4.0 (0.53)                    |                 |
| MEF <sub>32</sub> (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)* | 2.20 (62.3)                   |                 |
| Available Water Temperatures                                                 | Cold, Warm, Hot               |                 |
| Available Cycles                                                             | Normal, Synthetic, Delicate   |                 |
| Electrical Requirements (v/Hz/Ph-Amp)                                        | 120/60/1-15 Amp               |                 |
| Water Pressure - p.s.i (bar)                                                 | 20-120 (1.4/8.3)              |                 |
| Drain                                                                        | Pump                          |                 |
| Cylinder Finish                                                              | Stainless Steel               |                 |
| Net Weight - lb (kg)                                                         | 260 (118)                     |                 |
| Shipping Weight - lb (kg)                                                    | 270 (122.2)                   |                 |
| Shipping Dimensions Approx. - in                                             | Width                         | 34              |
|                                                                              | Depth                         | 30              |
|                                                                              | Height                        | 44.5            |
| Agency Approvals                                                             | cULus, ENERGY STAR® certified |                 |
| Model No.                                                                    | SFNNYRSP116TW01               | SFNNYASP116TW01 |

| Product                                                                      |        | Top Load Washer             |
|------------------------------------------------------------------------------|--------|-----------------------------|
| Color                                                                        |        | White                       |
| Capacity - lb (kg)                                                           |        | 16 (7.3)                    |
| Cylinder Volume - cu.ft. (liters)                                            |        | 3.19 (90.3)                 |
| Spin Speed G-Force (RPM)                                                     |        | 150 (710)                   |
| Motor Size - HP (kw)                                                         |        | 0.5 (0.37)                  |
| Water Consumption Per Cycle - g (liter)*                                     |        | 28.07 (106)                 |
| IWF (Water Factor) - gal/ft³ (liters/liter/cycle)*                           |        | 8.8 (1.18)                  |
| MEF <sub>32</sub> (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)* |        | 1.35 (38.2)                 |
| Available Water Temperatures                                                 |        | Cold, Warm, Hot             |
| Available Cycles                                                             |        | Normal, Synthetic, Delicate |
| Electrical Requirements (v/Hz/Ph-Amp)                                        |        | 120/60/1-15 Amp             |
| Water Pressure - p.s.i (bar)                                                 |        | 20-120 (1.4/8.3)            |
| Drain                                                                        |        | Pump                        |
| Cylinder Finish                                                              |        | Stainless Steel             |
| Net Weight - lb (kg)                                                         |        | 206 (93.4)                  |
| Shipping Weight - lb (kg)                                                    |        | 218 (98.8)                  |
| Shipping Dimensions Approx. - in                                             | Width  | 28                          |
|                                                                              | Depth  | 30                          |
|                                                                              | Height | 45                          |
| Agency Approvals                                                             |        | cULus                       |
| Model No.                                                                    |        | SWNNY2SP116TW01             |

| Dimensions                        | Width - in | Height - in | Depth - in | Floor to Door Opening - in | Door Swing - in |
|-----------------------------------|------------|-------------|------------|----------------------------|-----------------|
| Front Load Washer - Rear Control  | 26.875     | 43.875      | 27.73      | 14.6                       | 24              |
| Front Load Washer - Front Control | 26.875     | 44.34       | 27.73      | 14.6**                     | 24              |
| Top Load Washer                   | 25.625     | 43          | 28         | 51                         | –               |

For Commercial Use Only

Supply inject kits available.


\* Average usage based on multiple load sizes and current DOE test protocol.  
Real usage will vary depending on load size, composition and cycle selectivity.

\*\* For ADA compliance turn legs out from base 0.5 inches

For additional accessories and warranty, please refer to the price list.

# PREP FOR CARD

## SINGLE DRYERS AND STACKED DRYERS



### Prep for Card


Prep for card payment actuations involve integrating a secure and robust digital payment platform. This enhances the customer experience, streamlines transactions, and boosts operational efficiency.

### Single Dryers (Rear/Front)

- Integrated meter case
- Upfront lint filter easy to clean and secured
- Perfect balance of heat, airflow and tumble action for optimal performance and efficiency
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)

### Stacked Dryers (Tall/Short)

- Two commercial dryers in the space of one, both operating independently, including independent controls for optimum usage
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- Quiet, efficiency blower system

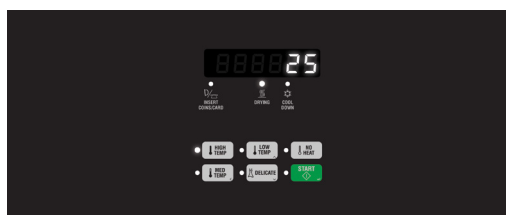

Prep for Card – Single Dryer Control Panel



Prep for Card – Stacked Dryer Control Panel

# COMMERCIAL THROUGH RETAIL

## PREP FOR CARD SINGLE DRYERS AND STACKED DRYERS



| Product                               | Single Dryer                         |                                    |
|---------------------------------------|--------------------------------------|------------------------------------|
|                                       | Rear Control                         | Front Control                      |
| Color                                 | White                                |                                    |
| Capacity - lb (kg)                    | 18 (8.2)                             |                                    |
| Cylinder Volume - cu.ft. (liters)     | 7.0 (198)                            |                                    |
| Motor (Thermal Protected) - HP        | 0.33                                 |                                    |
| Type of Gas (Gas Models Only)         | Factory Equipped Natural             |                                    |
| Available Cycles                      | High, Medium, Low, Delicate, No Heat |                                    |
| Air Outlet Diameter - in              | 4                                    |                                    |
| Exhaust Airflow - cfm (liters/sec)    | 220 (105)                            |                                    |
| Electrical Requirements (v/Hz/Ph-Amp) | *Electric                            | 208-240/60/1-30 Amp                |
|                                       | Gas                                  | 120/60/1-15 Amp                    |
| Heating Element                       | Electric                             | 5350W, 240V / 4750W, 208V          |
|                                       | Gas                                  | 25,000 Btu                         |
| Net Weight - lb (kg)                  | 150 (68)                             |                                    |
| Shipping Weight - lb (kg)             | 161 (73)                             |                                    |
| Shipping Dimensions Approx. - in      | Width                                | 30.5                               |
|                                       | Depth                                | 29.5                               |
|                                       | Height                               | 45                                 |
| Agency Approvals                      | Electric                             | cULus                              |
|                                       | Gas                                  | cCSAus                             |
| Model No.                             | SDENYRGS176TW01<br>SDGNYRGS116TW01   | SDENYAGS176TW01<br>SDGNYAGS116TW01 |

| Product                               | Stacked Dryer                        |                                    |
|---------------------------------------|--------------------------------------|------------------------------------|
|                                       | Tall                                 | Short                              |
| Color                                 | White                                |                                    |
| Capacity - lb (kg)                    | 18 (8.2) ea                          |                                    |
| Cylinder Volume - cu.ft. (liters)     | 7.0 (198) ea                         |                                    |
| Motor (Thermal Protected) - HP        | 0.33                                 |                                    |
| Type of Gas (Gas Models Only)         | Factory Equipped Natural             |                                    |
| Available Cycles                      | High, Medium, Low, Delicate, No Heat |                                    |
| Air Outlet Diameter - in              | 4                                    |                                    |
| Exhaust Airflow - cfm (liters/sec)    | 220 (105)                            |                                    |
| Electrical Requirements (v/Hz/Ph-Amp) | *Electric                            | 208-240/60/1-30 Amp                |
|                                       | Gas                                  | 120/60/1-15 Amp                    |
| Heating Element                       | Electric                             | 5350W, 240V / 4750W, 208V          |
|                                       | Gas                                  | 25,000 Btu                         |
| Net Weight - lb (kg)                  | 270 (122)                            |                                    |
| Shipping Weight - lb (kg)             | 280 (127)                            |                                    |
| Shipping Dimensions Approx. - in      | Width                                | 33                                 |
|                                       | Depth                                | 30                                 |
|                                       | Height                               | 80                                 |
| Agency Approvals                      | Electric                             | cULus                              |
|                                       | Gas                                  | cCSAus                             |
| Model No.                             | SSENYAGS176TW01<br>SSGNYAGS116TW01   | SSENYFGS176TW01<br>SSGNYFGS116TW01 |

| Dimensions                   | Width - in | Height - in | Depth - in | Floor to Door Opening - in | Door Swing - in |
|------------------------------|------------|-------------|------------|----------------------------|-----------------|
| Single Dryer - Rear Control  | 26.875     | 43          | 28         | 15.44                      | 23.5            |
| Single Dryer - Front Control | 26.875     | 44.34       | 28         | 15.44                      | 23.5            |
| Stacked Dryer - Tall         | 26.875     | 78.17       | 28         | 15.44                      | 23.5            |
| Stacked Dryer - Short        | 26.875     | 76.5        | 28         | 15.44                      | 23.5            |

**Note** (not supplied): Each stacked dryer pocket requires its own power cord.

### For Commercial Use Only


\* Electric dryers are dual rated for 208-240V applications. Using dryer in 208V will reduce the wattage output. An optional kit (61928) can be used to field convert the unit for 4750 output at 208V.

Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

**For additional accessories and warranty, please refer to the price list.**

# PREP FOR CARD

## STACKED WASHER-DRYERS



### Prep for Card

Prep for card payment actuations involve integrating a secure and robust digital payment platform. This enhances the customer experience, streamlines transactions, and boosts operational efficiency.

### Stacked Washer-Dryers (Tall)

- Washer is ADA compliant
- Combines heavy-duty construction with reliable operation
- The freestanding softmount design can be installed on all floor types or levels



ENERGY STAR®  
Certified Washer



Prep for Card – Stacked Washer-Dryer Control Panel



COMMERCIAL  
THROUGH RETAIL

PREP FOR CARD  
STACKED  
WASHER-DRYERS



| Product                                                                      |            | Stacked Washer-Dryer             |                                      |
|------------------------------------------------------------------------------|------------|----------------------------------|--------------------------------------|
|                                                                              |            | Washer                           | Dryer                                |
| Color                                                                        |            | White                            |                                      |
| Capacity - lb (kg)                                                           |            | 21.5 (9.5)                       | 18 (8.2)                             |
| Cylinder Volume - cu.ft. (liters)                                            |            | 3.42 (96.8)                      | 7.0 (198)                            |
| Spin Speed G-Force (RPM)                                                     |            | 440 (1200)                       | –                                    |
| Motor Size - HP                                                              |            | 0.9                              | 0.33                                 |
| Type of Gas (Gas Models Only)                                                |            | –                                | Factory Equipped Natural             |
| Water Consumption Per Cycle - g (liter)*                                     |            | 13.68 (51.8)                     | –                                    |
| IWF (Water Factor) - gal/ft³ (liters/liter/cycle)*                           |            | 4.0 (0.53)                       | –                                    |
| MEF <sub>32</sub> (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)* |            | 2.20 (62.3)                      | –                                    |
| Available Cycles                                                             |            | Normal, Synthetic, Delicate      | High, Medium, Low, Delicate, No Heat |
| Air Outlet Diameter - in                                                     |            | –                                | 4                                    |
| Exhaust Airflow - cfm (liters/sec)                                           |            | –                                | 220 (105)                            |
| Electrical Requirements (v/Hz/Ph-Amp)                                        | **Electric | 120/60/1-15 Amp                  | 208-240/60/1-30 Amp                  |
|                                                                              | Gas        | 120/60/1-15 Amp                  |                                      |
| Heating Element                                                              | Electric   | –                                | 5350W, 240V / 4750W, 208V            |
|                                                                              | Gas        | –                                | 25,000 Btu                           |
| Net Weight - lb (kg)                                                         |            | 385 (175)                        |                                      |
| Shipping Weight - lb (kg)                                                    |            | 417 (189)                        |                                      |
| Shipping Dimensions Approx. - in                                             | Width      | 34                               |                                      |
|                                                                              | Depth      | 30                               |                                      |
|                                                                              | Height     | 80                               |                                      |
| Agency Approvals                                                             | Electric   | cULus                            |                                      |
|                                                                              | Gas        | cCSAus                           |                                      |
| Model No.                                                                    |            | STENYASP176TW01, STGNYASP116TW01 |                                      |

| Dimensions                  | Width - in | Height - in | Depth - in | Floor to Door Opening - in | Door Swing - in |
|-----------------------------|------------|-------------|------------|----------------------------|-----------------|
| Stacked Washer-Dryer - Tall | 26.875     | 78.17       | 28         | 14.6***                    | 24              |

**Note** (not supplied): Stacked washer-dryer requires two power cords, one for washer, one for dryer.

For Commercial Use Only

\* Average usage based on multiple load sizes and current DOE test protocol.  
Real usage will vary depending on load size, composition and cycle selectivity.

\*\* Electric dryers are dual rated for 208-240V applications. Using dryer in 208V will reduce the wattage output. An optional kit (61928) can be used to field convert the unit for 4750 output at 208V.

Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

\*\*\* For ADA compliance turn legs out from base 0.5 inches.

For additional accessories and warranty, please refer to the price list.

# PUSH-TO-START

## TOP LOAD WASHERS, SINGLE DRYERS AND STACKED DRYERS




### Push-to-Start

Push-to-start actuations optimize laundry room efficiency without sacrificing performance. They provide easy push-to-start activation indicated by “In Use” light.

### Top Load Washers

- Automatic Balancing Suspension provides the industry’s best out-of-balance handling, completing wash cycles without interruption
- Extract speed of 710 RPM spins clothes out drier
- Curved four-vane polypropylene agitator provides 210° agitation stroke which delivers superior washability

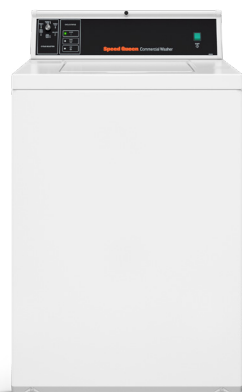


### Single Dryers (Rear)


- Integrated meter case
- Upfront lint filter easy to clean and secured
- Perfect balance of heat, airflow and tumble action for optimal performance and efficiency
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)

### Stacked Dryers (Tall)

- Two commercial dryers in the space of one, both operating independently, including independent controls for optimum usage
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- Quiet, efficiency blower system



Push-to-Start – Top Load Washer Control Panel



Push-to-Start – Single Dryer Control Panel



Push-to-Start – Stacked Dryer Control Panel

# COMMERCIAL THROUGH RETAIL

## PUSH-TO-START TOP LOAD WASHERS, SINGLE DRYERS, AND STACKED DRYERS



| Product                               | Single Dryer                          | Stacked Dryer                      |
|---------------------------------------|---------------------------------------|------------------------------------|
|                                       | Rear Control                          | Tall                               |
| Color                                 | White                                 |                                    |
| Capacity - lb (kg)                    | 18 (8.2)                              | 18 (8.2) ea                        |
| Cylinder Volume - cu.ft. (liters)     | 7.0 (198)                             | 7.0 (198) ea                       |
| Motor (Thermal Protected) - HP        | 0.33                                  |                                    |
| Type of Gas (Gas Models Only)         | Factory Equipped Natural/Mixed Gas    |                                    |
| Available Cycles                      | Normal, Perm Press, Delicate, No Heat |                                    |
| Air Outlet Diameter - in              | 4                                     |                                    |
| Exhaust Airflow - cfm (liters/sec)    | 220 (105)                             |                                    |
| Electrical Requirements (v/Hz/Ph-Amp) | *Electric                             | 208-240/60/1-30 Amp                |
|                                       | Gas                                   | 120/60/1-15 Amp                    |
| Heating Element                       | Electric                              | 5350W, 240V                        |
|                                       | Gas                                   | 5350W, 240V<br>4750W, 208V         |
|                                       | 25,000 Btu                            |                                    |
| Net Weight - lb (kg)                  | 150 (68)                              | 262 (119)                          |
| Shipping Weight - lb (kg)             | 161 (73)                              | 272 (123.4)                        |
| Shipping Dimensions Approx. - in      | Width                                 | 30.5                               |
|                                       | Depth                                 | 33                                 |
|                                       | Height                                | 29.5                               |
| Agency Approvals                      | Electric                              | 45                                 |
|                                       | Gas                                   | 80                                 |
| Model No.                             | Electric                              | cULus                              |
|                                       | Gas                                   | cCSAus                             |
| Model No.                             | SDEMNRGS173TW01<br>SDGMNRGS113TW01    | SSEMNRGS173TW01<br>SSGMNRGS113TW01 |

| Product                                                                       |        | Top Load Washer                                                                  |
|-------------------------------------------------------------------------------|--------|----------------------------------------------------------------------------------|
| Color                                                                         |        | White                                                                            |
| Capacity - lb (kg)                                                            |        | 16 (7.3)                                                                         |
| Cylinder Volume - cu.ft. (liters)                                             |        | 3.19 (90.3)                                                                      |
| Spin Speed G-Force (RPM)                                                      |        | 150 (710)                                                                        |
| Motor Size - HP (kw)                                                          |        | 0.5 (0.37)                                                                       |
| Water Consumption Per Cycle - g (liter)**                                     |        | 28.07 (106)                                                                      |
| IWF (Water Factor) - gal/ft³ (liters/liter/cycle)**                           |        | 8.8 (1.18)                                                                       |
| MEF <sub>32</sub> (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)** |        | 1.35 (38.2)                                                                      |
| Available Cycles                                                              |        | Normal Hot, Normal Warm, Normal Cold, Delicate, Perm Press Cold, Perm Press Warm |
| Electrical Requirements (v/Hz/Ph-Amp)                                         |        | 120/60/1-15 Amp                                                                  |
| Water Pressure - p.s.i (bar)                                                  |        | 20-120 (1.4/8.3)                                                                 |
| Drain                                                                         |        | Pump                                                                             |
| Cylinder Finish                                                               |        | Stainless Steel                                                                  |
| Net Weight - lb (kg)                                                          |        | 206 (93.4)                                                                       |
| Shipping Weight - lb (kg)                                                     |        | 218 (98.8)                                                                       |
| Shipping Dimensions Approx. - in                                              | Width  | 28                                                                               |
|                                                                               | Depth  | 30                                                                               |
|                                                                               | Height | 45                                                                               |
| Agency Approvals                                                              |        | cULus                                                                            |
| Model No.                                                                     |        | SWNMN2SP115TW01                                                                  |

| Dimensions                  | Width - in | Height - in | Depth - in | Floor to Door Opening - in | Door Swing - in |
|-----------------------------|------------|-------------|------------|----------------------------|-----------------|
| Single Dryer - Rear Control | 26.875     | 43          | 28         | 15.44                      | 23.5            |
| Stacked Dryer - Tall        | 26.875     | 78.17       | 28         | 15.44                      | 23.5            |
| Top Load Washer             | 25.625     | 43          | 28         | 51                         | —               |

**Note** (not supplied): Each stacked dryer pocket requires its own power cord.

### For Commercial Use Only

\* Electric dryers are dual rated for 208-240V applications. Using dryer in 208V will reduce the wattage output. An optional kit (61928) can be used to field convert the unit for 4750 output at 208V.

Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

\*\* Average usage based on multiple load sizes and current DOE test protocol. Real usage will vary depending on load size, composition and cycle selectivity.

**For additional accessories and warranty, please refer to the price list.**

# COIN SLIDE

## STACKED DRYERS



### Coin Slide

Coin Slide actuations offer heavy-duty operation, is easy to use and offers the basic features needed for optimal laundry room operations.

### Stacked Dryers (Tall)

- Two commercial dryers in the space of one, both operating independently, including independent controls for optimum usage
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- Quiet, efficiency blower system



Coin Slide – Stacked Dryer Control Panel

COMMERCIAL  
THROUGH RETAIL

COIN SLIDE  
STACKED  
DRYERS



| Product                                     |           | Stacked Dryer<br>Tall                      |
|---------------------------------------------|-----------|--------------------------------------------|
| Color                                       |           | White                                      |
| Capacity - lb (kg)                          |           | 18 (8.2) ea                                |
| Cylinder Volume - cu.ft. (liters)           |           | 7.0 (198) ea                               |
| Motor (Thermal Protected) - HP              |           | 0.33                                       |
| Type of Gas (Gas Models Only)               |           | Factory Equipped Natural                   |
| Available Cycles                            |           | Normal, Perm Press, Delicate, No Heat      |
| Air Outlet Diameter - in                    |           | 4                                          |
| Exhaust Airflow - cfm (liters/sec)          |           | 220 (105)                                  |
| Electrical<br>Requirements<br>(v/Hz/Ph-Amp) | *Electric | 208-240/60/1-30 Amp                        |
|                                             | Gas       | 120/60/1-15 Amp                            |
| Heating Element                             | Electric  | 5350W, 240V / 4750W, 208V                  |
|                                             | Gas       | 25,000 Btu                                 |
| Net Weight - lb (kg)                        |           | 270 (122)                                  |
| Shipping Weight - lb (kg)                   |           | 277 (126)                                  |
| Shipping Dimensions<br>Approx. - in         | Width     | 33                                         |
|                                             | Depth     | 30                                         |
|                                             | Height    | 80                                         |
| Agency<br>Approvals                         | Electric  | cULus                                      |
|                                             | Gas       | cCSAus                                     |
| Model No.                                   |           | SSESXAGS173TW01, SSGSXAGS113TW01           |
| Required Coin Kits<br>(sold separately)     |           | Coin Box<br>Model #: CK124<br>(2 required) |

| Dimensions           | Width - in | Height - in | Depth - in | Floor to Door<br>Opening - in | Door<br>Swing - in |
|----------------------|------------|-------------|------------|-------------------------------|--------------------|
| Stacked Dryer - Tall | 26.875     | 78.17       | 28         | 15.44                         | 23.5               |

**Note** (not supplied): Each stacked dryer pocket requires its own power cord.

**For Commercial Use Only**

\* Electric dryers are dual rated for 208-240V applications. Using dryer in 208V will reduce the wattage output. An optional kit (61928) can be used to field convert the unit for 4750 output at 208V.  
Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

**For additional accessories and warranty, please refer to the price list.**

# NON-VENDED

## FRONT LOAD WASHERS

### Electronic

Non-Vended Electronic controls offer an easy to read digital display and features a variety of cycle and temperature settings to assure the best laundering possible.

### Mechanical

Non-Vended Mechanical control provides easy to start activation indicated by “In Use” light.

### Front Load Washers - Electronic (Rear/Front)

- Redesigned four compartment soap dispenser for simplified use and cleaning
- Revolutionary suspension and sensing technology
- Easy to read digital display

### Front Load Washers - Mechanical (Tall)


- Revolutionary balancing technology
- Durable stainless steel tub
- Four compartment soap dispenser




ENERGY STAR®  
Certified Washer



ENERGY STAR®  
Certified Washer

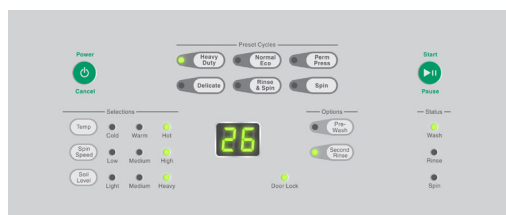

Non-Vended – Electronic Rear & Front Control  
Front Load Washer Control Panel

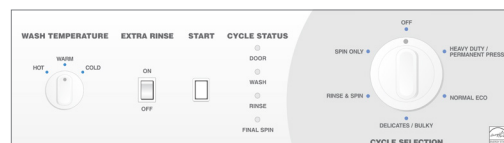

Non-Vended – Mechanical Rear Control  
Front Load Washer Control Panel

# COMMERCIAL THROUGH RETAIL

## NON-VENDED FRONT LOAD WASHERS



| Product                                                                                   | Electronic - Front Load Washer                                   |                 |
|-------------------------------------------------------------------------------------------|------------------------------------------------------------------|-----------------|
|                                                                                           | Rear Control                                                     | Front Control   |
| Color                                                                                     | White                                                            |                 |
| Capacity - lb (kg)                                                                        | 21.5 (9.5)                                                       |                 |
| Cylinder Volume - cu.ft. (liters)                                                         | 3.42 (96.8)                                                      |                 |
| Spin Speed G-Force (RPM)                                                                  | 440 (1200)                                                       |                 |
| Motor Size - HP (kw)                                                                      | 0.9 (0.67)                                                       |                 |
| Water Consumption Per Cycle - g (liter)*                                                  | 13.68 (51.8)                                                     |                 |
| IWF (Water Factor) - gal/ft <sup>3</sup> (liters/liter/cycle)*                            | 4.0 (0.53)                                                       |                 |
| MEF <sub>32</sub> (Modified Energy Factor) ft <sup>3</sup> /kWh/cycle (Liters/kWh/cycle)* | 2.20 (62.3)                                                      |                 |
| Available Water Temperatures                                                              | Cold, Warm, Hot                                                  |                 |
| Available Cycles                                                                          | Heavy Duty, Normal Eco, Perm Press, Delicate, Rinse & Spin, Spin |                 |
| Electrical Requirements (v/Hz/Ph-Amp)                                                     | 120/60/1-15 Amp                                                  |                 |
| Water Pressure - p.s.i (bar)                                                              | 20-120 (1.4/8.3)                                                 |                 |
| Drain                                                                                     | Pump                                                             |                 |
| Cylinder Finish                                                                           | Stainless Steel                                                  |                 |
| Net Weight - lb (kg)                                                                      | 260 (118)                                                        |                 |
| Shipping Weight - lb (kg)                                                                 | 270 (122.5)                                                      |                 |
| Shipping Dimensions Approx. - in                                                          | Width                                                            | 34              |
|                                                                                           | Depth                                                            | 30              |
|                                                                                           | Height                                                           | 44.5            |
| Agency Approvals                                                                          | cULus, ENERGY STAR® certified                                    |                 |
| Model No.                                                                                 | LFNE5RSP115TW01                                                  | LFNE5BSP115TW01 |

| Product                                                                                   |        | Mechanical - Front Load Washer                                                  |
|-------------------------------------------------------------------------------------------|--------|---------------------------------------------------------------------------------|
| Color                                                                                     |        | White                                                                           |
| Capacity - lb (kg)                                                                        |        | 21.5 (9.5)                                                                      |
| Cylinder Volume - cu.ft. (liters)                                                         |        | 3.42 (96.8)                                                                     |
| Spin Speed G-Force (RPM)                                                                  |        | 440 (1200)                                                                      |
| Motor Size - HP (kw)                                                                      |        | 0.9 (0.67)                                                                      |
| Water Consumption Per Cycle - g (liter)*                                                  |        | 13.68 (51.8)                                                                    |
| IWF (Water Factor) - gal/ft <sup>3</sup> (liters/liter/cycle)*                            |        | 4.0 (0.53)                                                                      |
| MEF <sub>32</sub> (Modified Energy Factor) ft <sup>3</sup> /kWh/cycle (Liters/kWh/cycle)* |        | 2.20 (62.3)                                                                     |
| Available Water Temperatures                                                              |        | Cold, Warm, Hot                                                                 |
| Available Cycles                                                                          |        | Heavy Duty/Permanent Press, Normal Eco, Delicate/Bulky, Rinse & Spin, Spin Only |
| Electrical Requirements (v/Hz/Ph-Amp)                                                     |        | 120/60/1-15 Amp                                                                 |
| Water Pressure - p.s.i (bar)                                                              |        | 20-120 (1.4/8.3)                                                                |
| Drain                                                                                     |        | Pump                                                                            |
| Cylinder Finish                                                                           |        | Stainless Steel                                                                 |
| Net Weight - lb (kg)                                                                      |        | 260 (118)                                                                       |
| Shipping Weight - lb (kg)                                                                 |        | 270 (122.5)                                                                     |
| Shipping Dimensions Approx. - in                                                          | Width  | 34                                                                              |
|                                                                                           | Depth  | 30                                                                              |
|                                                                                           | Height | 44.5                                                                            |
| Agency Approvals                                                                          |        | cULus, ENERGY STAR® certified                                                   |
| Model No.                                                                                 |        | LFN50RSP115TW01                                                                 |

| Dimensions                                     | Width - in | Height - in | Depth - in | Floor to Door Opening - in | Door Swing - in |
|------------------------------------------------|------------|-------------|------------|----------------------------|-----------------|
| Electronic - Front Load Washer - Rear Control  | 26.875     | 43          | 27.73      | 14.6**                     | 24.06           |
| Electronic - Front Load Washer - Front Control | 26.875     | 40.42       | 27.73      | 14.6**                     | 24.06           |
| Mechanical - Front Load Washer - Rear Control  | 26.875     | 43          | 27.73      | 14.6                       | 24.06           |

### For Commercial Use Only

Supply inject kits available.

\* Average usage based on multiple load sizes and current DOE test protocol.  
Real usage will vary depending on load size, composition and cycle selectivity.

\*\* For ADA compliance turn legs out from base 0.5 inches

Note: Not all options are available for all models.

**For additional accessories and warranty, please refer to the price list.**

# NON-VENDED

## SINGLE DRYERS AND STACKED DRYERS

### Electronic

Non-Vended Electronic controls offer an easy to read digital display and features a variety of cycle and temperature settings to assure the best laundering possible.

### Single Dryers (Rear/Front)

- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- Moisture sensing technology
- Efficiency and fast dry cycle

### Stacked Dryers (Tall)

- 2.06 sq. ft. door opening is the largest in the industry, providing easy loading and unloading
- Quiet, efficient blower system
- Upfront lint filter easy to clean and secured



Non-Vended – Electronic Rear & Front Control  
Single Dryer Control Panel



Non-Vended – Electronic Stacked Dryer  
Control Panel



# COMMERCIAL THROUGH RETAIL

## NON-VENDED SINGLE DRYERS AND STACKED DRYERS



| Product                               |           | Single Dryer                                                      |                                    |
|---------------------------------------|-----------|-------------------------------------------------------------------|------------------------------------|
|                                       |           | Rear Control                                                      | Front Control                      |
| Color                                 |           | White                                                             |                                    |
| Capacity - lb (kg)                    |           | 18 (8.2)                                                          |                                    |
| Cylinder Volume - cu.ft. (liters)     |           | 7.0 (198)                                                         |                                    |
| Motor (Thermal Protected) - HP        |           | 0.33                                                              |                                    |
| Type of Gas (Gas Models Only)         |           | Factory Equipped Natural/Mixed Gas                                |                                    |
| Available Cycles                      |           | Regular, Permanent Press, Delicate, Time Dry, Quick Dry, Fluff Up |                                    |
| Air Outlet Diameter - in              |           | 4                                                                 |                                    |
| Exhaust Airflow - cfm (liters/sec)    |           | 220 (105)                                                         |                                    |
| Electrical Requirements (v/Hz/Ph-Amp) | *Electric | 208-240/60/1-30 Amp                                               |                                    |
|                                       | Gas       | 120/60/1-15 Amp                                                   |                                    |
| Heating Element                       | Electric  | 5350W, 240V                                                       | 5350W, 240V<br>4750W, 208V         |
|                                       | Gas       | 25,000 Btu                                                        |                                    |
| Net Weight - lb (kg)                  |           | 126 (57.2)                                                        |                                    |
| Shipping Weight - lb (kg)             |           | 136 (61.7)                                                        |                                    |
| Shipping Dimensions Approx. - in      | Width     | 30.5                                                              |                                    |
|                                       | Depth     | 29.5                                                              |                                    |
|                                       | Height    | 45                                                                |                                    |
| Agency Approvals                      | Electric  | cULus                                                             |                                    |
|                                       | Gas       | cCSAus                                                            |                                    |
| Model No.                             |           | LDEE7RGS173TW01<br>LDGE7RGS113TW01                                | LDEE5BGS173TW01<br>LDGE5BGS113TW01 |

| Product                               |           | Stacked Dryer - Tall                                              |
|---------------------------------------|-----------|-------------------------------------------------------------------|
| Color                                 |           | White                                                             |
| Capacity - lb (kg)                    |           | 18 (8.2) ea                                                       |
| Cylinder Volume - cu.ft. (liters)     |           | 7.0 (198) ea                                                      |
| Motor (Thermal Protected) - HP        |           | 0.33                                                              |
| Type of Gas (Gas Models Only)         |           | Factory Equipped Natural/Mixed Gas                                |
| Available Cycles                      |           | Regular, Permanent Press, Delicate, Time Dry, Quick Dry, Fluff Up |
| Air Outlet Diameter - in              |           | 4                                                                 |
| Exhaust Airflow - cfm (liters/sec)    |           | 220 (105)                                                         |
| Electrical Requirements (v/Hz/Ph-Amp) | *Electric | 208-240/60/1-30 Amp                                               |
|                                       | Gas       | 120/60/1-15 Amp                                                   |
| Heating Element                       | Electric  | 5350W, 240V / 4750W, 208V                                         |
|                                       | Gas       | 25,000 Btu                                                        |
| Net Weight - lb (kg)                  |           | 262 (119)                                                         |
| Shipping Weight - lb (kg)             |           | 272 (123.4)                                                       |
| Shipping Dimensions Approx. - in      | Width     | 33                                                                |
|                                       | Depth     | 30                                                                |
|                                       | Height    | 80                                                                |
| Agency Approvals                      | Electric  | cULus                                                             |
|                                       | Gas       | cCSAus                                                            |
| Model No.                             |           | LSEE5AGS173TW01<br>LSGE5AGS113TW01                                |

| Dimensions                   | Width - in | Height - in | Depth - in | Floor to Door Opening - in | Door Swing - in |
|------------------------------|------------|-------------|------------|----------------------------|-----------------|
| Single Dryer - Rear Control  | 26.875     | 43          | 28         | 15.44                      | 23.5            |
| Single Dryer - Front Control | 26.875     | 40.42       | 28         | 15.44                      | 23.5            |
| Stacked Dryer - Tall         | 26.875     | 78.17       | 28         | 15.44                      | 23.5            |

**Note** (not supplied): Each stacked dryer pocket requires its own power cord.

### For Commercial Use Only

\* Electric dryers are dual rated for 208-240V applications. Using dryer in 208V will reduce the wattage output. An optional kit (61928) can be used to field convert the unit for 4750 output at 208V.

Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.



**For additional accessories and warranty, please refer to the price list.**

# NON-VENDED

## TOP LOAD WASHERS AND STACKED WASHER-DRYERS

### Electronic

Non-Vended Electronic controls offer an easy to read digital display and features a variety of cycle and temperature settings to assure the best laundering possible.

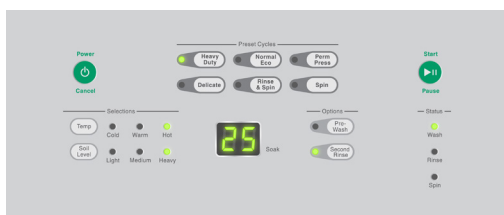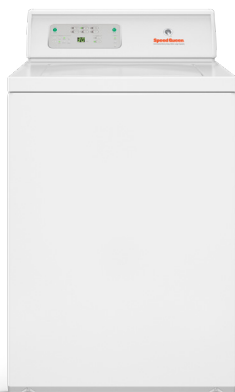


Non-Vended – Electronic  
Top Load Washer Control Panel

### Top Load Washers

- Automatic Balancing Suspension provides the industry's best out-of-balance handling, completing wash cycles without interruption.
- Curved four-vane polypropylene agitator provides 210° agitation stroke which delivers superior washability
- Extract speed of 710 RPM spins clothes out drier

### Stacked Washer-Dryers (Tall)

- Freestanding softmount design can be installed on all floor types or levels
- Industry-leading 1200 RPM spin speed exerts 440 G-Force extraction
- Includes cycle status indicator lights

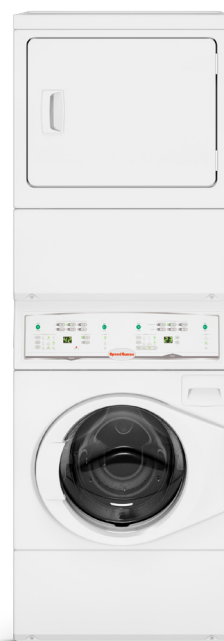

ENERGY STAR®  
Certified Washer




Non-Vended – Electronic  
Stacked Washer-Dryer Control Panel

# COMMERCIAL THROUGH RETAIL

## NON-VENDED

## TOP LOAD WASHERS AND STACKED WASHER- DRYER

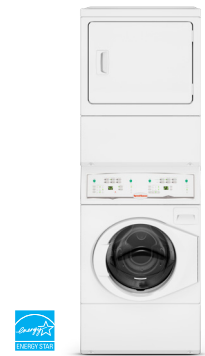

| Product                                                                                   |        | Top Load Washer                                                  |
|-------------------------------------------------------------------------------------------|--------|------------------------------------------------------------------|
| Color                                                                                     |        | White                                                            |
| Capacity - lb (kg)                                                                        |        | 16 (7.3)                                                         |
| Cylinder Volume - cu.ft. (liters)                                                         |        | 3.17 (89.76)                                                     |
| Spin Speed G-Force (RPM)                                                                  |        | 150 (710)                                                        |
| Motor Size - HP (kw)                                                                      |        | 0.5 (0.37)                                                       |
| Water Consumption Per Cycle - g (liter)*                                                  |        | 27.9 (105.61)                                                    |
| IWF (Water Factor) - gal/ft <sup>3</sup> (liters/liter/cycle)*                            |        | 8.8 (1.18)                                                       |
| MEF <sub>32</sub> (Modified Energy Factor) ft <sup>3</sup> /kWh/cycle (Liters/kWh/cycle)* |        | 1.35 (38.2)                                                      |
| Available Water Temperatures                                                              |        | Cold, Warm, Hot                                                  |
| Available Cycles                                                                          |        | Heavy Duty, Normal Eco, Perm Press, Delicate, Rinse & Spin, Spin |
| Electrical Requirements (v/Hz/Ph-Amp)                                                     |        | 120/60/1-15 Amp                                                  |
| Water Pressure - p.s.i (bar)                                                              |        | 20-120 (1.4/8.3)                                                 |
| Drain                                                                                     |        | Pump                                                             |
| Cylinder Finish                                                                           |        | Stainless Steel                                                  |
| Net Weight - lb (kg)                                                                      |        | 186 (84.4)                                                       |
| Shipping Weight - lb (kg)                                                                 |        | 196 (88.9)                                                       |
| Shipping Dimensions Approx. - in                                                          | Width  | 28                                                               |
|                                                                                           | Depth  | 30                                                               |
|                                                                                           | Height | 45                                                               |
| Agency Approvals                                                                          |        | cULus                                                            |
| Model No.                                                                                 |        | LWNE22SP115TW01                                                  |

**Note** (not supplied): Stacked washer-dryer requires two power cords, one for washer, one for dryer.

**For Commercial Use Only**

| Product                                                                                   |            | Stacked Washer-Dryer                                       |                                                              |
|-------------------------------------------------------------------------------------------|------------|------------------------------------------------------------|--------------------------------------------------------------|
|                                                                                           |            | Washer                                                     | Dryer                                                        |
| Color                                                                                     |            | White                                                      |                                                              |
| Capacity - lb (kg)                                                                        |            | 21.5 (9.5)                                                 | 18 (8.2)                                                     |
| Cylinder Volume - cu.ft. (liters)                                                         |            | 3.42 (96.8)                                                | 7.0 (198)                                                    |
| Spin Speed G-Force (RPM)                                                                  |            | 440 (1200)                                                 | –                                                            |
| Motor Size - HP                                                                           |            | 0.9                                                        | 0.33                                                         |
| Type of Gas (Gas Models Only)                                                             |            | –                                                          | Factory Equipped Natural/Mixed Gas                           |
| Water Consumption Per Cycle - g (liter)*                                                  |            | 13.68 (51.8)                                               | –                                                            |
| IWF (Water Factor) - gal/ft <sup>3</sup> (liters/liter/cycle)*                            |            | 4.0 (0.53)                                                 | –                                                            |
| MEF <sub>32</sub> (Modified Energy Factor) ft <sup>3</sup> /kWh/cycle (Liters/kWh/cycle)* |            | 2.20 (62.3)                                                | –                                                            |
| Available Cycles                                                                          |            | Heavy Duty, Normal Eco, Perm Press, Delicate, Rinse & Spin | Regular, Perm Press, Delicate, Time Dry, Quick Dry, Fluff Up |
| Air Outlet Diameter - in                                                                  |            | 4                                                          |                                                              |
| Exhaust Airflow - cfm (liters/sec)                                                        |            | 220 (105)                                                  |                                                              |
| Electrical Requirements (v/Hz/Ph-Amp)                                                     | **Electric | 120/60/1-15 Amp                                            | 208-240/60/1-30 Amp                                          |
|                                                                                           | Gas        | 120/60/1-15 Amp                                            | 120/60/1-15 Amp                                              |
| Heating Element                                                                           | Electric   | –                                                          | 5350W, 240V<br>4750W, 208V                                   |
|                                                                                           | Gas        | –                                                          | 25,000 Btu                                                   |
| Net Weight - lb (kg)                                                                      |            | 350 (158.8)                                                |                                                              |
| Shipping Weight - lb (kg)                                                                 |            | 380 (172.4)                                                |                                                              |
| Shipping Dimensions Approx. - in                                                          | Width      | 34                                                         |                                                              |
|                                                                                           | Depth      | 30                                                         |                                                              |
|                                                                                           | Height     | 80                                                         |                                                              |
| Agency Approvals                                                                          | Electric   | cULus                                                      |                                                              |
|                                                                                           | Gas        | cCSAus                                                     |                                                              |
| Model No.                                                                                 |            | LTEE5ASP175TW01<br>LTGE5ASP115TW01                         |                                                              |

| Dimensions                  | Width - in | Height - in | Depth - in | Floor to Door Opening - in | Door Swing - in |
|-----------------------------|------------|-------------|------------|----------------------------|-----------------|
| Top Load Washer             | 25.625     | 43          | 28         | 51                         | –               |
| Stacked Washer-Dryer - Tall | 26.875     | 78.17       | 27.73      | 14.6***                    | 24              |

\* Average usage based on multiple load sizes and current DOE test protocol.  
Real usage will vary depending on load size, composition and cycle selectivity.

\*\* Electric dryers are dual rated for 208-240V applications. Using dryer in 208V will reduce the wattage output. An optional kit (61928) can be used to field convert the unit for 4750 output at 208V.

Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

\*\*\* For ADA compliance turn legs out from base 0.5 inches.

**For additional accessories and warranty, please refer to the price list.**



For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice. The quality management systems of Alliance Laundry Systems are registered to ISO 9001.

Printed in the USA.

Speed Queen by Alliance Laundry Systems

©2023 Alliance Laundry Systems LLC

AR23-0092

***Commercial product is not authorized for sale to Residential end consumers.***