


FIORENTINA 48"

DUAL FUEL - SOLID OVEN DOOR



OGS486FCU

TECHNICAL DRAWINGS

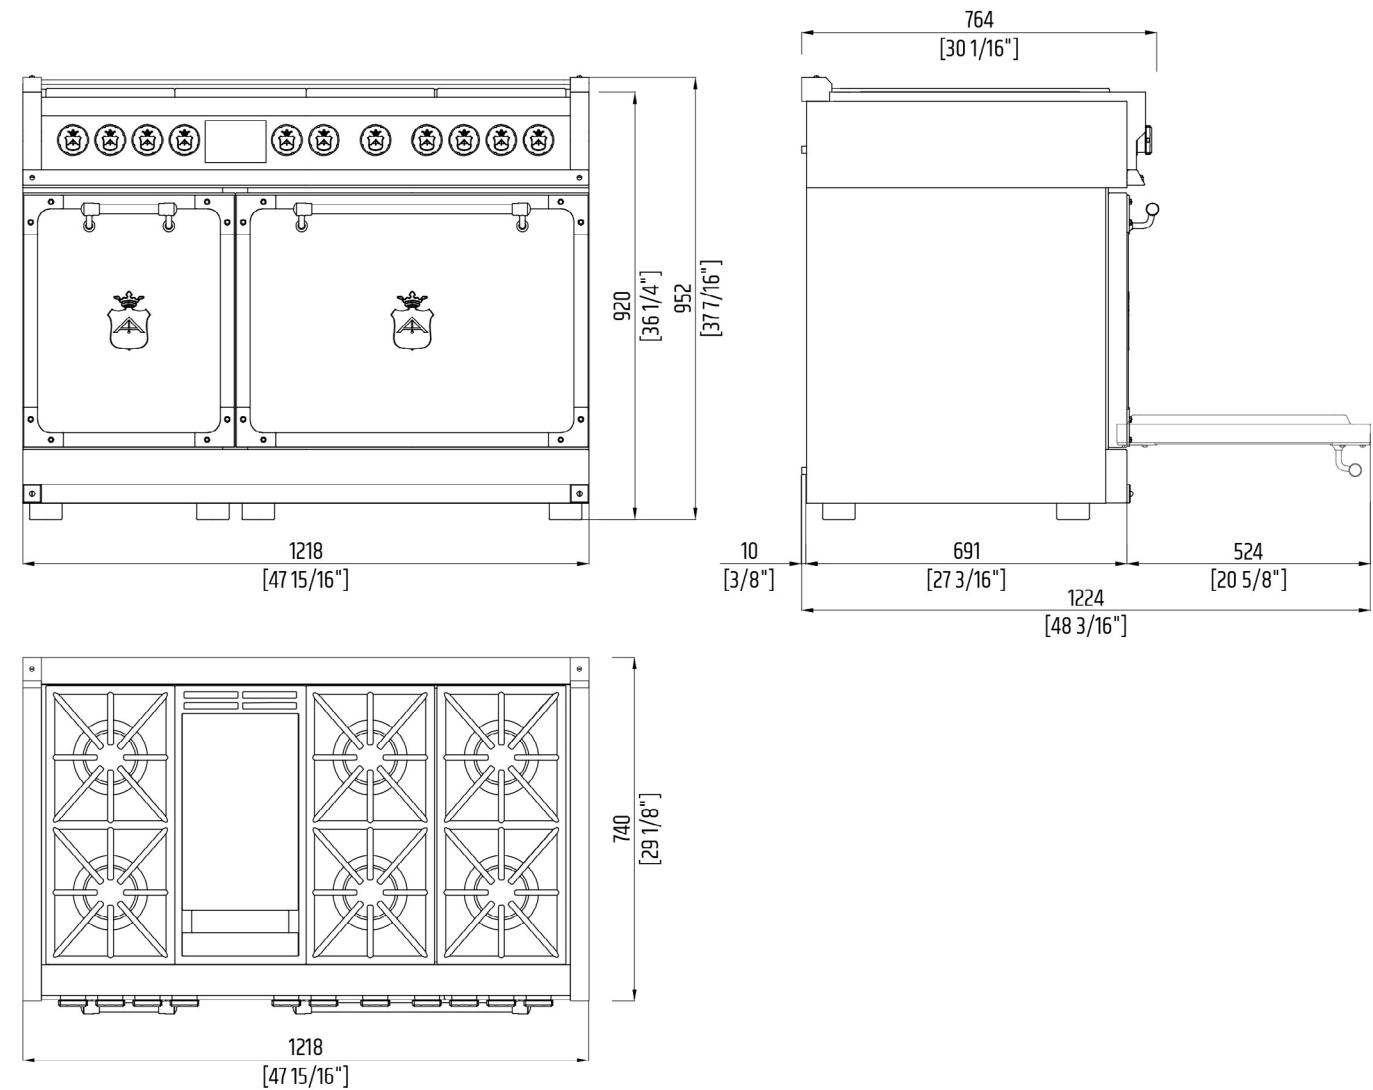

CONTROL PANEL		GAS COOKTOP FEATURES	
Control Type	11 Heavy Duty Knobs	Electric re-ignition system	•
Oven Programming	Electronic with 6 touch keys	Flame-out sensing	•
Display: clock/temperature/function	White led	Top mount injectors	•
COOKTOP		L.P. conversion kit	•
Type	GAS (NG or LP)	Dual crown brass burners	•
Cooking Surface	Matte black enamel	Heavy duty cast iron grates	3
		Cooking zones	6 burner + griddle
		Burners types	All dual flame/Simmer burner
		Front-L/ Front-R - Pwr (Max/Min) G20-5" / 31-10"	20000 (BTU/h) - 5850W / 750 (BTU/h) - 220W 15000 (BTU/h) - 4400W / 750 (BTU/h) - 220W
		Rear-L/ Front Center "Right"/ Rear Center "Right"/ Rear-R - Power (Max/Min) G20 - 5" / G31 - 10"	18000 (BTU/h) - 5300W / 750 (BTU/h) - 220W 15000 (BTU/h) - 4400W / 750 (BTU/h) - 220W
		Griddle Burner (Center "Left")	Thermostat Control Griddle Burner
		Power (Max/Min) G20 - 5" / G31 - 10"	11500 (BTU/h) - 3370W / 2000 (BTU/h) - 590W

OVEN		18" ACCESSORY OVEN	30" MAIN OVEN
Type	Electric self-clean - dual convection (true euro conv.)	76 lt	124 lt
Temperature regulation	Electronic control (min/max 170/550°F - 75/290°C)	Black	Black
OVEN FEATURES		Rack positions	6
Dual True convection	6 Digit touch control: digital timer and knobs	Oven lights	2x20W halogen
Black porcelain enamel interior	2 chromed racks		3x20W halogen
1 Fully retractable telescopic rack	PYROLYSIS Self-cleaning		
OVEN FUNCTIONS			
Proof	Bake		
Defrost	Dehydrate		
Convection Roast	Convection broil		
OVEN DOOR(S)			
Door hinges - soft-closing system	Heavy duty steady tilt		
Handle style	Brass tube, brass endcaps		
OVEN CAVITY			
Capacity	76 lt		
Cavity enamel colour	Black		
Rack positions	6		
Heating elements (@230V)			
Broil upper heating element	2100W		
Upper auxiliary element	700W		
Concealed bake lower heating element	1750W		
Convection element	1x1300W		
DIMENSIONS/WEIGHT			
Overall dim - width	47 15/16" / 1218 mm		
Overall dim - height (min-max)	36 1/4" - 37 7/16" / 920 mm - 952 mm		
Overall dim - depth	30 1/16" / 764 mm		
Gross weight	240 kg		
POWER/RATINGS (208/240 V, 60HZ)			
kW / Amps rating at 120-240V, 60Hz	7.00 kW - 31.3 A		
kW / Amps rating at 120-208V, 60Hz	6.00 kW - 29.5 A		
Power cable	Nema 14-50P		
INSTRUCTIONS FOR USE			
Use & Care manual / Installation manual	italian/english		


FIORENTINA 48”

DUAL FUEL - GLASS OVEN DOOR



OGG486FCU

TECHNICAL DRAWINGS

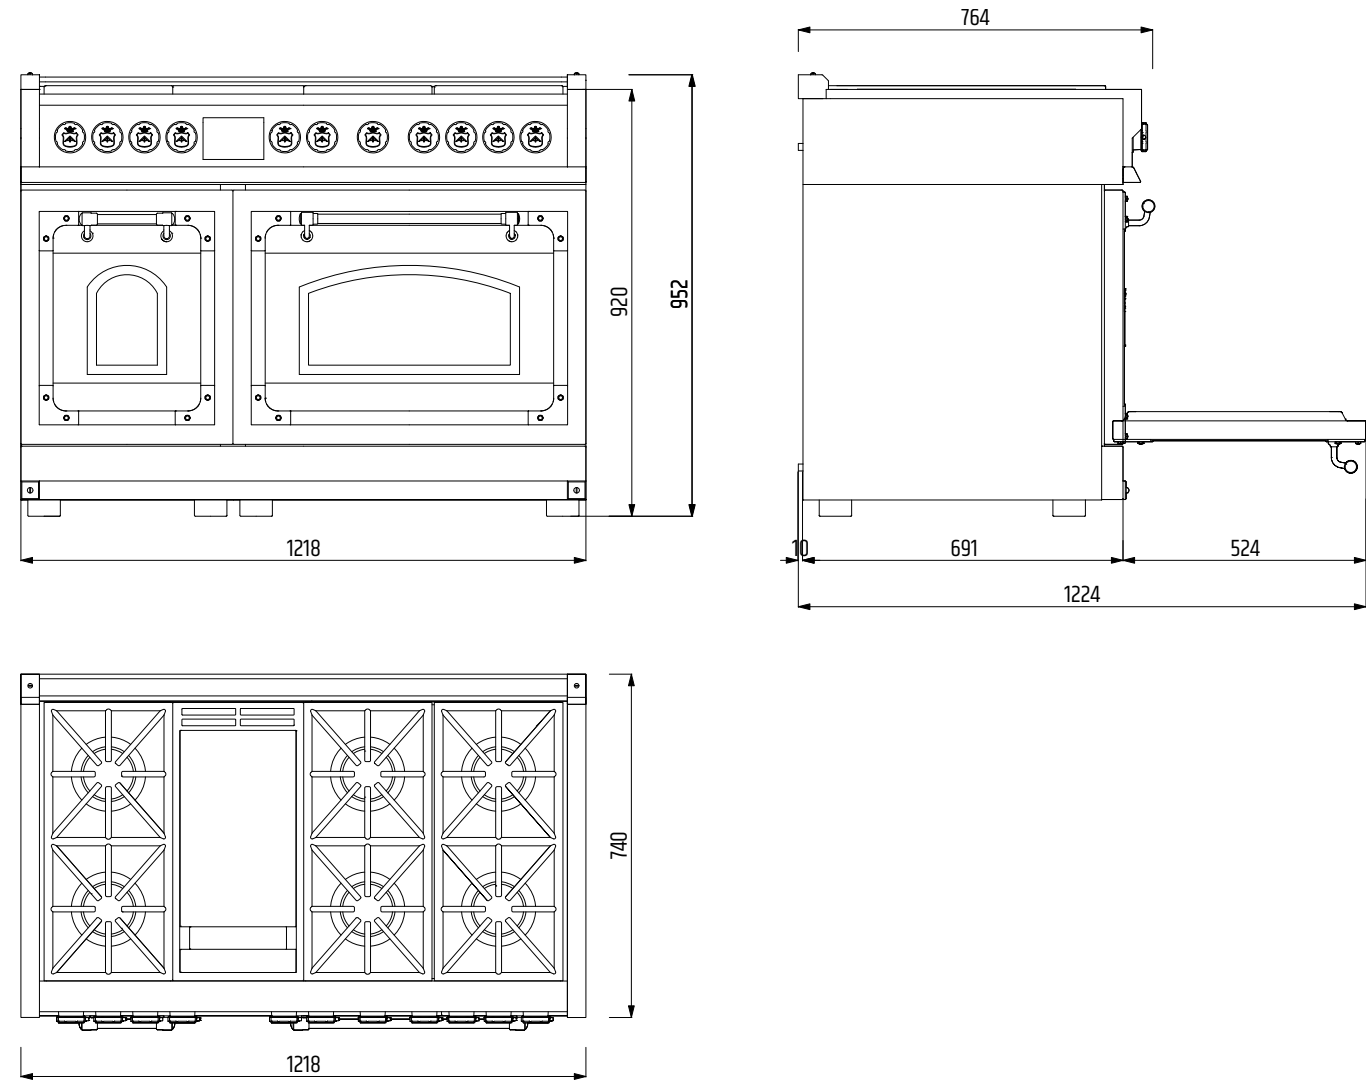

CONTROL PANEL		GAS COOKTOP FEATURES	
Control Type	11 Heavy Duty Knobs	Electric re-ignition system	•
Oven Programming	Electronic with 6 touch keys	Flame-out sensing	•
Display: clock/temperature/function	White led	Top mount injectors	•
COOKTOP		L.P. conversion kit	•
Type	GAS (NG or LP)	Dual crown brass burners	•
Cooking Surface	Matte black enamel	Heavy duty cast iron grates	3
		Cooking zones	6 burner + griddle
		Burners types	All dual flame/Simmer burner
		Front-L/ Front-R - Pwr (Max/Min) G20-5" / 31-10"	20000 (BTU/h) - 5850W / 750 (BTU/h) - 220W 15000 (BTU/h) - 4400W / 750 (BTU/h) - 220W
		Rear-L/ Front Center "Right"/ Rear Center "Right"/ Rear-R - Power (Max/Min) G20 - 5" / G31 - 10"	18000 (BTU/h) - 5300W / 750 (BTU/h) - 220W 15000 (BTU/h) - 4400W / 750 (BTU/h) - 220W
		Griddle Burner (Center "Left")	Thermostat Control Griddle Burner
		Power (Max/Min) G20 - 5" / G31 - 10"	11500 (BTU/h) - 3370W / 2000 (BTU/h) - 590W

OVEN		OVEN CAVITY	18" ACCESSORY OVEN	30" MAIN OVEN
Type	Electric self-clean - dual convection (true euro conv.)	Capacity	76 lt	124 lt
Temperature regulation	Electronic control (min/max 170/550°F - 75/290°C)	Cavity enamel colour	Black	Black
OVEN FEATURES		Rack positions	6	6
Dual True convection	6 Digit touch control: digital timer and knobs	Oven lights	2x20W halogen	3x20W halogen
Black porcelain enamel interior	2 chromed racks	HEATING ELEMENTS (@230V)		
1 Fully retractable telescopic rack	PYROLYSIS Self-cleaning	1 enamel tray with anti-splash insert	2100W	3500W
OVEN FUNCTIONS		Internal lighting with 3 light sources	700W	1032W
Proof	Bake	Convection bake	1750W	3000W
Defrost	Dehydrate	Broil	Convection element	2x1300W
Convection Roast	Convection broil	Pizza	DIMENSIONS/WEIGHT	
OVEN DOOR(S)			Overall dim - width	47 15/16" / 1218 mm
Oven glass window	Deep embossed extra wide window		Overall dim - height (min-max)	36 1/4" - 37 7/16" / 920 mm - 952 mm
Door cooling system	4 heat resistant glasses		Overall dim - depth	30 1/16" / 764 mm
Door hinges - soft-closing system	Heavy duty steady tilt		Gross weight	240 kg
Handle style	Brass tube, brass endcaps		POWER/RATINGS (208/240 V, 60HZ)	
			kW / Amps rating at 120-240V, 60Hz	7.00 kW - 31.3 A
			kW / Amps rating at 120-208V, 60Hz	6.00 kW - 29.5 A
			Power cable	Nema 14-50P
INSTRUCTIONS FOR USE			INSTRUCTIONS FOR USE	
Use & Care manual / Installation manual		italian/english		