# SUMMIT

# SBC15NCF



#### 34.25" x 15" x 22.5" (H x W x D)

15" wide, built-in, commercially listed nitro coffee kegerator, auto defrost with digital thermostat, stainless steel door, front lock, black cabinet, sealed back, and includes all equipment necessary to dispense nitro-infused coffee

#### **Highlights**:

15" wide design makes it ideal for smaller residential and commercial settings

Commercially approved tap kit includes all equipment to serve nitro-infused coffee

Listed to NSF-7 standards and meets UL 471 for commercial use

### **Product Features:**

15" wide design	Slim-fit design complements smaller commercial and residential spaces	
Commercially approved	ETL-S listed to NSF-7 standard and meets UL-471 for use in commercial settings	
Built-in capability	Make the best use of space by installing your appliance under the counter; NOTE: if installing flush with wall or cabinets, unit will require an extra ¼" of space due to the door design. For more information, see the user manual	
Complete tap kit for serving nitro-infused coffee	Commercially approved tap kit includes a stainless steel tower, Nitrogen tank, and regulator	
Nitrogen tank included	5 lb. Nitrogen tank included (ships empty)	
Nitro coffee dispenser	2.9 cu.ft. interior can accept a 1/6 (sixtel) nitro coffee keg	
Automatic defrost	Reduced user maintenance with auto defrost operation	
Digital thermostat	Electronic controls ensure easy temperature management, with an external readout in Celsius or Fahrenheit	
Tap cool system	Keeps cold air flowing to the tower for consistently cold nitro coffee	

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

info@summitappliance.com

 $\checkmark$ 




## SUMMIT

## SBC15NCF Specifications:

Overview	
Height of Cabinet	34.25" (87 cm)
Width	15.0" (38 cm)
Width with Door Open	15.25" (39 cm)
Depth	22.5" (57 cm)
Depth with Handle	24.5" (62 cm)
Depth with door at 90°	36.5" (93 cm)
Capacity	2.9 cu.ft. (82 L)
Defrost Type	Automatic
Door	Stainless Steel
Cabinet	Black
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Sanitation	ETL-S
Energy Usage/Year	280.0kWh/year
Amps	1.25
Voltage/Frequency	115 V AC/60 Hz
Weight	78.0 lbs. (35 kg)
Shipping Weight	84.0 lbs. (38 kg)
Estimated Time to Ship	1 to 2 days
Parts & Labor Warranty	1 Year
Compressor Warranty	5 Years
Kegerator	
Door Swing	RHD
Reversible	Yes
Tap Kit	Yes
Height with Tap	49.75" (126 cm)
Number of Taps	1
Adjustable Shelves	Yes
Shelf Type	Chrome
Shelf Qty	2
Thermostat Type	Digital
Fan Type	Exterior
Refrigerant	R600a
Refrigerant Amount	1.06 oz.
High Side PSI	150.0
Low Side PSI	50.0
Inter Height	26.75" (68 cm)
Interior Width	11.75" (30 cm)
	```

Interior Depth	17.5" (44 cm)
Compressor Step Height	3.75" (10 cm)
Compressor Step Width	11.75" (30 cm)
Compressor Step Depth	5.0" (13 cm)
Level Legs Qty	4
Wheel Qty	4
Temperature Range	34º to 50º F

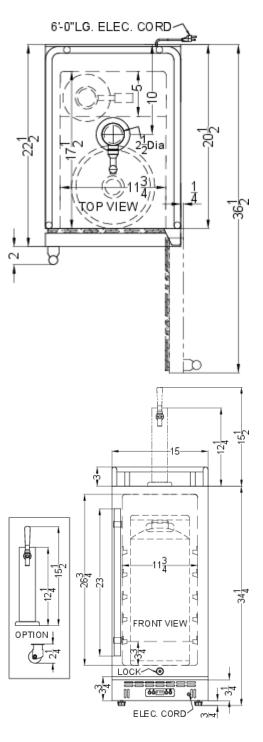

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

