

Classic style and superior performance make this island range hood the perfect addition to any kitchen. Quiet operation and bright LED lighting enhance your cooking experience, while the sleek 4-speed capacitive touch control makes operation and clean-up easy. An optional remote allows for convenient control from anywhere in the kitchen.

SIZE	STAINLESS	GREASE FILTERS (replacement)	NON-DUCTED CHARCOAL FILTERS
35-7/16 in.	EIT1366SS	S1108684 (set of 3)	S99527023 (set of 3)

HVI PERFORMANCE											
Duct Orientation	Size	Damper	Sones				CFM				
			Normal	Med-Low*	Med-high*	High	Normal	Med-Low*	Med-High*	High 0.25 in. w.g.	High 0.1 in. w.g.
Round - Vertical	6 in.	Included	< 0.3	4.0	9.5	12.0	110	290	490	560	580 ‡

‡ CFM reduction to 400 or 300 is available. Review Installation instructions for more details.

FEATURES	
Max blower CFM**	640
Finish	430 Stainless Steel no. 4 Brushed
Wall Mount	No
Telescopic Flue	Yes - Accommodates 8-ft. to 9-ft. ceilings
Convertible to non-ducted operation	Yes - Non-Duct Kit ANKIBF4 sold separately
Blower type	Single, Centrifugal
Cord-connected	No
Soft-Touch Control	<ul style="list-style-type: none"> <li>• Blower low speed</li> <li>• Blower medium-low speed</li> <li>• Blower medium-high speed</li> <li>• Blower high speed</li> <li>• 2-Intensity lighting</li> <li>• 15-Minute delay</li> </ul>
Lighting	4 x LED Modules 5.5 W, (included)
Grease Filters	Baffle filters, dishwasher-safe with quick-release latch

AC INPUT	
120 V, 60 Hz - 3.7 AMPS	



#### OPTIONAL ACCESSORIES (sold separately)

Flue Extension for 10-ft. ceiling	FXNEIT1SS
Non-Duct Kit	ANKIBF4
Remote Control	HCR4

MOUNTING HEIGHT	
26-in. from cooktop to bottom of hood	

LIMITED WARRANTY	
1-year (See installation manual for full warranty text.)	

#### FOR INDOOR USE ONLY

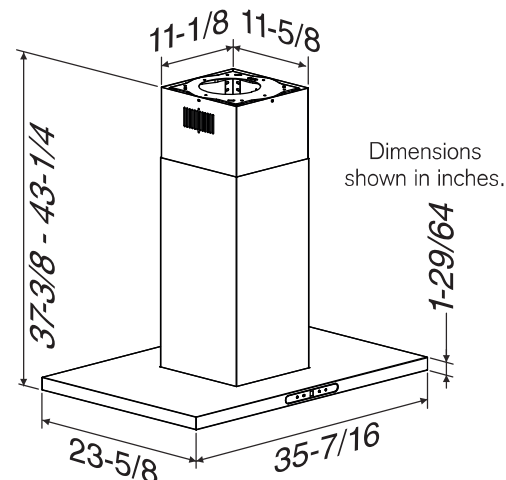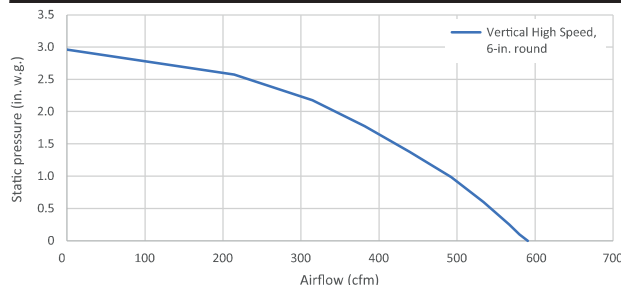

Dimensions shown in inches.

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 and 0.25 in. static pressure at high speed based on tests conducted in an HVI-approved state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

\* Where noted performance rating is not HVI certified but was established in accordance with HVI Standardized test procedure.

\*\* Max. blower CFM indicates the performance of the hood blower in open air. The Max. blower CFM rating is not HVI certified.

<b>Broan-NuTone LLC</b>	926 West State Street, Hartford, Wisconsin, USA 53027	broan-nutone.com	800-558-1711
<b>Venmar Ventilation ULC</b>	550 Lemire Blvd., Drummondville, Québec, Canada J2C 7W9	broan-nutone.ca	800-567-3855

1108680A