

VF2A-FS

Two Section Full Solid Door Freezer

VALIANCE®

by  HOSHIZAKI

VF2A-FS
09/15/25
Item #13736

W x D x H

54.31" x 32.00" x 81.70"
(including 4" casters)



Dimensions / Capacity

Two Section VF2A-FS

Interior Storage Capacity (CF) (AHAM)	42.45 ft ³
Overall Width x Depth	54.31" x 32.00"
Height (including 4" casters)	81.70"
Door Opening (W x H)	22.63" x 52.31"
Depth with Door Open at 90°	57.5"
Adjustable Shelves	6
Shelf Dimensions (W x D)	23.94" x 25.16"
Crated Shipping Weight	543 lbs
Crated Length x Depth x Height	58" x 33.5" x 83.88"

Electrical / Refrigeration

Two Section VF2A-FS

Voltage	115/60/1
HACR Breaker	15.0 Amps
Electrical Connection (NEMA)	5-15P 
Voltage Range	103-127
Ambient Temp. Range	45° to 100°F
Control Setpoint Range	-4° to 4°F
Amperage	4.6
Energy Consumption (kWh/day) @ASHRAE	6.94
Approx. Nominal Compress. BTU/HR (HP)	1718(1/2HP)
Refrigerant / Charge Amount (oz.)	R290 / (4.2oz)

Options

- ☐ Full Tray Pan Rack, 16 Pan Capacity (HS-5786)
- ☐ Half Tray Pan Rack, 8 Pan Capacity (HS-5787)
- ☐ Left 2-Section UR Shelf, 1 pack (HS-5790)
- ☐ Left 2-Section UR Shelf, 3 Pack (HS-5791)
- ☐ Right 2-Section UR Shelf, 1 pack (HS-5792)
- ☐ Right 2-Section UR Shelf, 3 pack (HS-5793)

Warranty

3 Year - labor on entire machine
4 Year - parts on entire machine
5 Year - parts on Compressor

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Item #: _____
Project: _____
Qty: _____
AIA#: _____

FEATURES

- Rear-Ducted Air-Flow ensures even cooling throughout entire cabinet
- Energy efficient interior LED light
- Environmentally friendly R290 hydrocarbon refrigerant
- Fits full size tray pans
- 3, 4, 5 Warranty
- Stay-open and self-closing doors
- Exterior - Stainless steel doors, DualGuard™ Coated steel sides
- Interior - Stainless steel floor, aluminum sides, rear and top
- SmartCheck™ time initiated and time or temperature terminated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section
- Standard with 4" casters (three with brakes)
- 9 ft. cord and plug
- Cabinet Qty: 22

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

We reserve the right to change specifications without notice.

VF2A-FS


Two Section Full Solid Door Freezer

VALIANCE[®]


by  HOSHIZAKI

VF2A-FS
09/15/25
Item #13736

FRONT VIEW

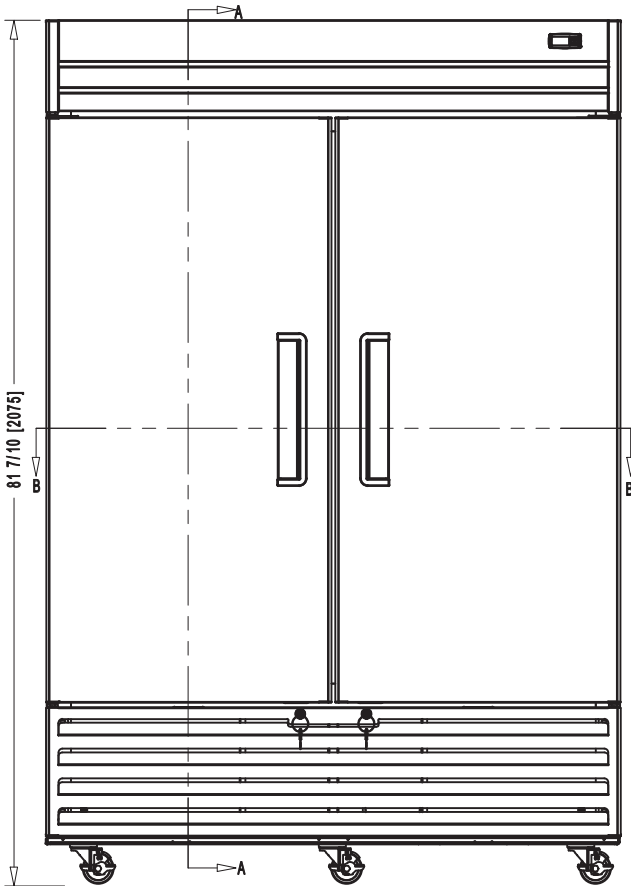

SIDE VIEW

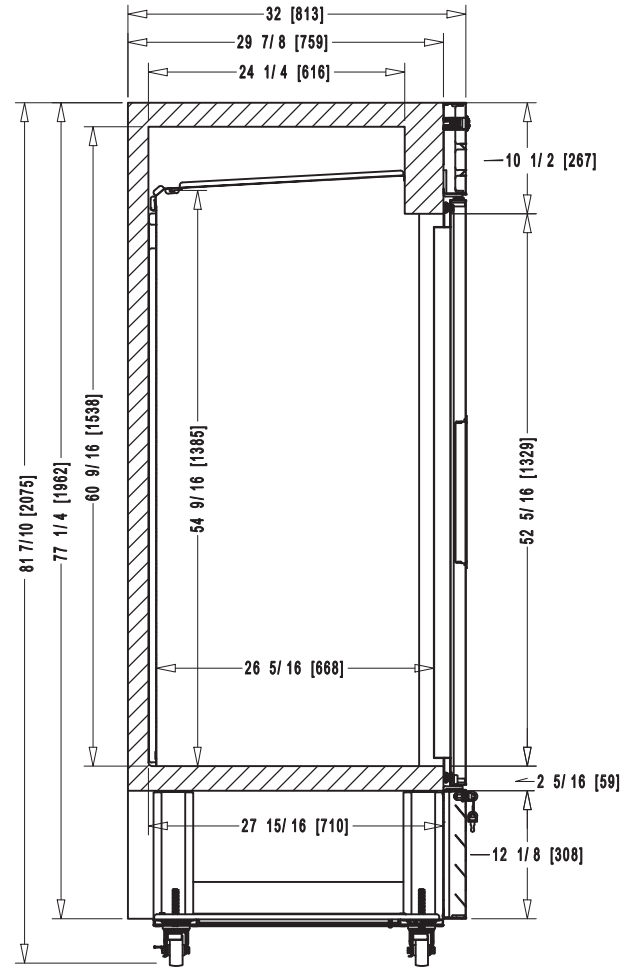

PLAN VIEW

