
PWLCL136S1 PRO Canopy Hood






For homeowners who are passionate about the culinary arts, the seamless welded corner craftsmanship, traditional styling and gleaming stainless steel of this hood, provides the look and performance expected from a professional-grade range hood.

With the new backlit hidden knob controls and traditional baffle filters, it is available in 36" and equipped with a 1200 CFM blower to support all cooking needs. Designed for standard ducted ventilation only.

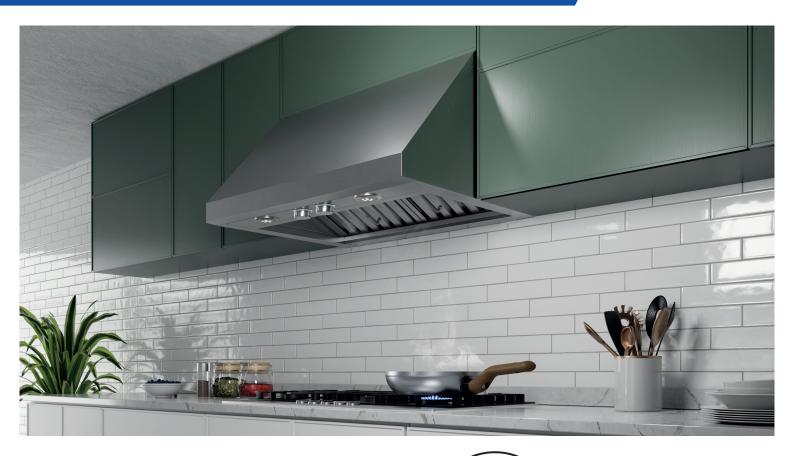

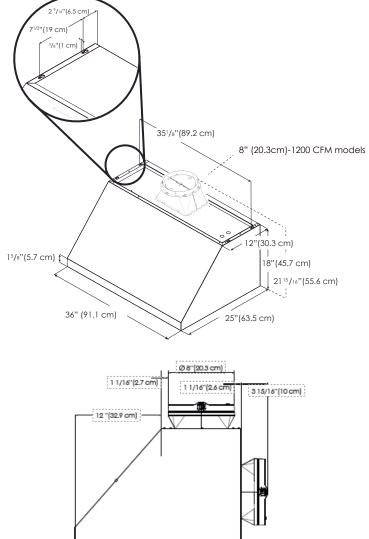



SPECIFICATIONS

Model: PWLCL136S1 Dimensions: 36"W x 25"D x 18"H Blower Type(internal):** 1200 CFM(4-speed) Noise (sones):** 2 - 8.5 Sones Finish: Stainless Steel Controls: Fully Retractable Rotating Knobs with White Backlighting Illumination: 2 LED, 6.5 Watts 3000 KELVIN 540 LUMEN/Lamp Grease Filter: (2) Grease Collecting Stainless Steel Baffle Duct Transition: 8" Round with Backdraft Damper (top and rear) Installation Type: Ducted or Recirculating with Kit Mounting Height Range: Electric 24", Gas ≥ 30" Electrical: 120V - 60 Hz, 913 Watts ACCESSORIES: ACC02158 Long Chimney Ext. 6": ACC02158 Long Chimney Ext. 12": ACC02158 Heat Lamp w/2 175W bulbs: ACC0155107
Blower Type(internal):** 1200 CFM(4-speed) Noise (sones):** 2 - 8.5 Sones Finish: Stainless Steel Controls: Fully Retractable Rotating Knobs with White Backlighting Illumination: 2 LED, 6.5 Watts 3000 KELVIN 540 LUMEN/Lamp (Replaceable Lamps 1 Intensity) 2 LED, 6.5 Watts 3000 KELVIN 540 LUMEN/Lamp Grease Filter: (2) Grease Collecting Stainless Steel Baffle Duct Transition: 8" Round with Backdraft Damper (top and rear) Installation Type: Ducted or Recirculating with Kit Mounting Height Range: Electric ≥ 24", Gas ≥ 30" Electrical: 120V - 60 Hz, 913 Watts ACC02158 ACC02161
Noise (sones):** 2 - 8.5 Sones Finish: Stainless Steel Controls: Fully Retractable Rotating Knobs with White Backlighting Illumination: 2 LED, 6.5 Watts 3000 KELVIN 540 LUMEN/Lamp (Replaceable Lamps 1 Intensity) 2 LED, 6.5 Watts 3000 KELVIN 540 LUMEN/Lamp Grease Filter: (2) Grease Collecting Stainless Steel Baffle Duct Transition: 8" Round with Backdraft Damper (top and rear) Installation Type: Ducted or Recirculating with Kit Mounting Height Range: Electric ≥ 24", Gas ≥ 30" Electrical: 120V - 60 Hz, 913 Watts ACCESSORIES: ACC02158 Long Chimney Ext. 6": ACC02161
Finish: Stainless Steel Controls: Fully Retractable Rotating Knobs with White Backlighting Illumination: (Replaceable Lamps 1 Intensity) 2 LED, 6.5 Watts 3000 KELVIN 540 LUMEN/Lamp Grease Filter: (2) Grease Collecting Stainless Steel Baffle Duct Transition: 8" Round with Backdraft Damper (top and rear) Installation Type: Ducted or Recirculating with Kit Mounting Height Range: Electric ≥ 24", Gas ≥ 30" Electrical: 120V - 60 Hz, 913 Watts ACC02158 Long Chimney Ext. 6": ACC02161
Controls: Fully Retractable Rotating Knobs with White Backlighting Illumination: 2 LED, 6.5 Watts 3000 KELVIN 540 LUMEN/Lamp Grease Filter: (2) Grease Collecting Stainless Steel Baffle Duct Transition: 8" Round with Backdraft Damper (top and rear) Installation Type: Ducted or Recirculating with Kit Mounting Height Range: Electric ≥ 24", Gas ≥ 30" Electrical: 120V - 60 Hz, 913 Watts ACCESSORIES: ACC02158 Long Chimney Ext. 6": ACC02161
Illumination: (Replaceable Lamps 1 Intensity) 2 LED, 6.5 Watts 3000 KELVIN 540 LUMEN/Lamp Grease Filter: (2) Grease Collecting Stainless Steel Baffle Duct Transition: 8" Round with Backdraft Damper (top and rear) Installation Type: Ducted or Recirculating with Kit Mounting Height Range: Electric ≥ 24", Gas ≥ 30" Electrical: 120V - 60 Hz, 913 Watts ACCESSORIES: ACC02158 Long Chimney Ext. 6": ACC02161
(Replaceable Lamps 1 Intensity) 2 LED, 6.5 Watts 3000 KELVIN 540 LUMEN/Lamp Grease Filter: (2) Grease Collecting Stainless Steel Baffle Duct Transition: 8" Round with Backdraft Damper (top and rear) Installation Type: Ducted or Recirculating with Kit Mounting Height Range: Electric ≥ 24", Gas ≥ 30" Electrical: 120V - 60 Hz, 913 Watts ACCESSORIES: ACC02158 Long Chimney Ext. 6": ACC02161
Duct Transition: 8" Round with Backdraft Damper (top and rear) Installation Type: Ducted or Recirculating with Kit Mounting Height Range: Electric ≥ 24", Gas ≥ 30" Electrical: 120V - 60 Hz, 913 Watts ACCESSORIES: ACC02158 Long Chimney Ext. 6": ACC02161
Installation Type: Ducted or Recirculating with Kit Mounting Height Range: Electric ≥ 24", Gas ≥ 30" Electrical: 120V - 60 Hz, 913 Watts ACCESSORIES: ACC02158 Long Chimney Ext. 6": ACC02161
Mounting Height Range: Electric ≥ 24", Gas ≥ 30" Electrical: 120V - 60 Hz, 913 Watts ACCESSORIES: ACC02158 Long Chimney Ext. 6": ACC02158 ACC02161 ACC02161
Electrical: 120V - 60 Hz, 913 Watts ACCESSORIES: Iong Chimney Ext. 6": Long Chimney Ext. 12": ACC02158 ACC02161 ACC02161
ACCESSORIES: Iong Chimney Ext. 6": ACC02158 Long Chimney Ext. 12": ACC02161
Long Chimney Ext. 6": ACC02158 Long Chimney Ext. 12": ACC02161
Long Chimney Ext. 12": ACC02161
Long Chinney LAL 12.
Heat Lamp w/2 175W bulbs: ACC0155107
Stainless Steel Backsplash: ACC0142867
External Blower Shell Kit: ACC0179547 (8" or 10" duct size compatible, only for 1200 CFM models)
Inline Blower Shell Kit: ACC0179549(8" or 10" duct size compatible, only for 1200 CFM models)
RECIRCULATING KITS:
Carbon Filters: ACC0192765 (Contains 4 round carbon filters)
Metal Deflector: ACC0192763 (8" round metal deflector for 1200 CFM models)

WARRANTY:

Two (2) years parts & in-home labor

FEATURES

ᢆᠿ

QUIET SYSTEM - Specialized technology that allows reducing sound 2 levels of your hood, which can effectively decrease noise by more than 35%. Grease Collecting Baffle Filters - Intended for high airflow cooking, Their ([111])) "S" shape design and Stainless Steel finish is crafted to capture significant amounts of grease.

Thermal barrier - The system detects extreme temperatures above 158 degrees and automatically increases the blower speed to HIGH.

AIR FLOW CONTROL - AFC technology enables the user to reduce the maximum blower CFM achieving <300 CFMs, to meet local code AFC requirements.



Superior performance - High performance ventilation with a 1200 CFM blower.

AIRFLOW CONTROL

Air Flow Control technology enables the user to reduce the maximum blower CFM of your hood achieving <300 CFMs, to meet local code requirements.

This model includes an Electronic Bypass Kit that needs to be placed at the moment of installing.



* The product images shown are for illustration purposes only and may not be an exact representation of the product.

** CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.