# SKSRT480SIS

# 48-INCH DUAL-FUEL PRO RANGETOP WITH SOUS-VIDE AND INDUCTION







#### **BUILT-IN SOUS VIDE**

The industry's first built-in sous vide delivering the ultimate in precision cooking, right on the cooktop. Get professional-style results every time and capture the full, true flavor of foods.

## **POWER-UP OR SIMMER DOWN**

Two Ultra-High Burners deliver 23K BTUs of pure cooking power for better searing and quick stir frying. Two Ultra-Low Burners simmer down to maintain temperatures as low as 100° to prepare delicate sauces and sugary confections.

## **TWO-ZONE INDUCTION**

When the recipe calls for instant temperatures and precision control, two induction zones meet the culinary need. The zones can be combined for use with a griddle, teppanyaki plate or large cookware.

## **BUILT-IN WOK GRATE**

The two front burner grates are convertible for roundbottom wok cooking. Stir fry at home with professionalstyle results.

## Innovation

Wi-Fi Enabled for ThinQ° Control with iPhone / Android App	Yes
Remote Monitoring	Yes
Sous Vide Cooking	Yes

## **Cooktop Features**

Number of Burners / Elements	
Sous Vide + 4 Burners + 2 Zone Inductio	n
Continuous Grates	2
Wok Convertible Grate (On Front Burners)	Yes
Heating Element "ON" Indicator Light	Yes
LED Power Level Display	Yes

## **Cooktop Performance**

Simmer – Max. BTU/h (NG)	
Left Rear	310 – 15,000
Right Rear	310 – 15,000
Left Front	650 – 23,000
Right Front	650 – 23,000
Induction Cooktop (W)	
Front (Level 9 / Boost)	2,000/3,650
Rear (Level 9 / Boost)	2,000/3,650
Flex (Boost)	3,650
Sous Vide Module	800W

©2025 LG Electronics USA, Inc. All rights reserved. "Signature Kitchen Suite" and the Signature Kitchen Suite logo are registered trademarks of LG Electronics Inc. Design, features and specifications are subject to change without notice. Specifications are for planning purposes only. Consult the product's installation instructions for final dimensional data and other details prior to making cutouts or custom panels. Consult with a heating and ventilation engineer for your specific ventilation requirements. Non-metric weights and measurements are approximate. Smart features require Internet access.

# SKSRT480SIS

# 48-INCH DUAL-FUEL PRO RANGETOP WITH SOUS-VIDE AND INDUCTION



## **Controls**

Knob Cooktop Controls w/LED Display Yes

# Warranty Summary\*

Limited Warranty, Parts & Labor 3 Years

## Rangetop / General Features

Sealed Gas Burners (Brass)	Yes
Surface Material	Black Porcelain
Stainless Steel Side Panels	Yes

## **Natural Gas or LP**

Gas Rangetops are shipped by the factory to operate on natural gas. If the location / job site requires conversion from natural gas to propane (LP), utilize the included LP kit. Conversion must be done by a qualified installer or service technician.

## **Technical Specs**

Energy Source	Natural Gas and Electric
Alternative Energy Source	LP Gas and Electric
LP Conversion Kit Included	Yes
KW & Amp Rating at 240V	4.7 kW
Required Power Supply	240 / 208V, 60 Hz, 30 Amp

## **Dimensions and Weight**

Overall Width (inches)	47 7/8"
Overall Height Including Grates (inches)	8 15/16"
Overall Depth Including Knobs (inches)	28 15/16"
Overall Depth without Knobs (inches)	26 3/4"
Net Weight (approx.)	193 lbs.
Shipping Weight (approx.)	261 lbs.

## **Accessories**

Included Accessories:

2 Wok Grates, Sous Vide Bath, Sous Vide Rack


<sup>\*</sup>These warranties give you specific legal rights and you may have other rights that vary from state to state. For complete warranty details, refer to your Use & Care manual.

# SKSRT480SIS

# 48-INCH DUAL-FUEL PRO RANGETOP WITH SOUS-VIDE AND INDUCTION




## **CUTOUT DIMENSIONS**

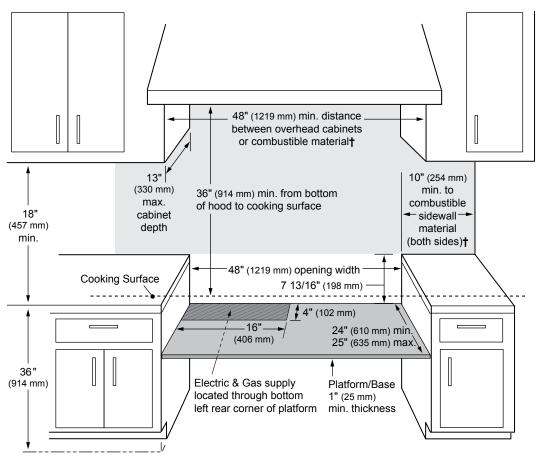

<sup>&</sup>lt;sup>†</sup>As defined in the "National Fuel Gas Code" (ANSI Z223.1, Current Edition). Clearances from non-combustiblematerials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances of less than 12" (305 mm) must be approved by the local codes and/or by the local authority having jurisdiction.

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area. For island installation, 12" (305 mm) minimum clearance from back of rangetop.

## **OVERALL PRODUCT DIMENSIONS**



**Important Installation Information:** Rangetops use a single phase, four-wire cable, 120/240 volt, 60 hertz, AC-only electrical supply with ground.

