800 Series Washer with Home Connect® - WAW285H2UC





WAW285H2UC White

The 800 Series Laundry pair is ENERGY STAR® certified and offers matching quality, water protection, design and fast wash and dry cycles.

Features & Benefits

The Bosch 800 Series washer with Home Connect® can be operated from anywhere.

AquaStop®Plus provides extra protection against water damage.

Customized stain options treat organic oils, blood, red wine and grass.

SpeedPerfect® provides up to 40% faster washing time.*

At 2.2 cu. ft. Bosch washers are compact in size without sacrificing capacity so you can fit a variety of loads.









General Properties	
Tub material	Stainless Steel
Maximum spin speed	1,400 rpm
Interior light	Yes (LED)
Leak protection systems	AquaStop® Plus (AquaStop® Base + Aquashield® Hose)
Internal water heater	Yes
Stackable	Yes with Stacking Kit Accessory
Silence level – washing	50 dBA
Silence level – spinning	71 dBA
Programs (No.), [Special]	(14), [Super Quick 15, Whitest Whites]
Options (No.), [Special]	(10) [Remote Start, EcoPerfect™, Stains]
Home Connect™ (Wi-Fi enabled)	Yes
Energy consumption	84 kWh/yr
Water consumption	2,379 gal/yr
ENERGY STAR® certified	Yes
Capacity	
Capacity	2.2 cu. ft.
Design Elements	
Door ring	Chrome
Control type	Premium LED touch
Dial	Illuminated jog dial
Bosch logo on door glass	Yes
Technical Details	
Watts	2,520 W
Circuit breaker	15 A**
Volts	208/220-240 V
Current	10.5 A
Frequency	60 Hz
Power Cord (included) [Type]	(Yes) [240V; NEMA 6-15, 3-prong]

Technical Details Continued		
Power cord length	63" (Full Length)	
Drain hose length	57" (Full Length)	
Inlet hose length	59" (Full Length)	
Door hinge	Left Side (Not Reversible)	
Dimensions & Weight		
Dimensions & Weight		
Dimensions & Weight Overall appliance dimensions (HxWxD)	33 1/4" x 23 1/2" x 25"	
Overall appliance		
Overall appliance dimensions (HxWxD)	x 25"	

[†]ADA compliance

- Meets ADA height and access requirements when installed on pedestal.
- Meets ADA operable parts requirements for controls and detergent dispenser.

Accessories	
Short Stainless Steel Hose (If needed for plumbing box clearance with AQS hose)	P/N 645787

Dryer Stacking Kits





Kit w/ Shelf Kit w/out Shelf Kit w/Brackets Necessary only when stacking a matching Bosch dryer on top of washer. Shown here for reference only.

Power Adapters







Matching Bosch Dryers are supplied with WTZPA20UC adapter to fit a standard 4-Prong, 30A, Dryer receptacle (NEMA 14-30R) to power both Bosch Washers and Drvers.

Note: - 3-Prong Adapter may be ordered directly from Bosch (not supplied with Washer or Dryer).

- Use of two individual NEMA 6-15R or 6-20R receptacles/circuits may be used as alternative means to power Washer and Dryer.



WMZPW20W Washer Pedestal

As compared to Perm Press Heavy Soil cycle without SpeedPerfect®

**Stated circuit breaker size is if the appliance is plugged into an individual 240/208V, 15A minimum branch circuit.


Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST). Sat 6 am to 3 pm PST). Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.


Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

800 Series Washer with Home Connect® - WAW285H2UC



Installation Details

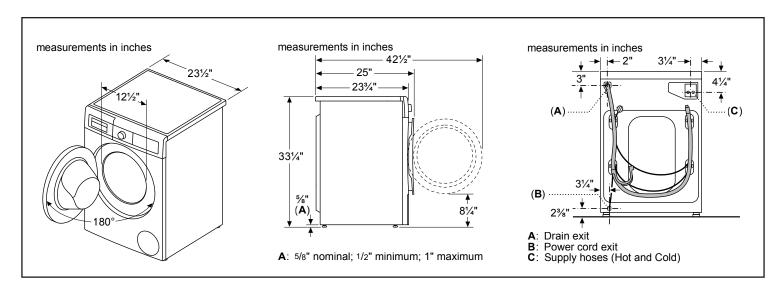

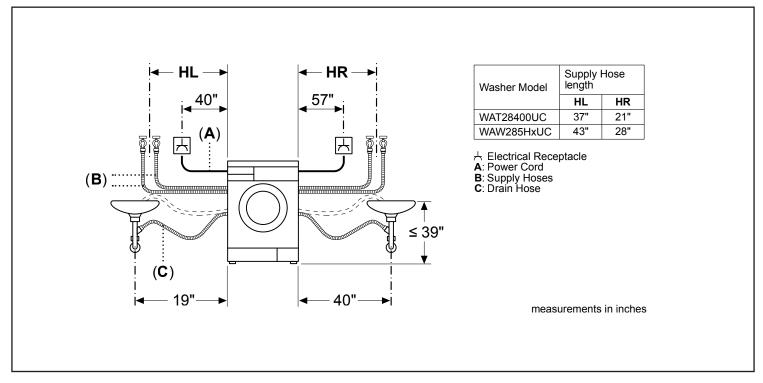

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).


Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

800 Series Washer with Home Connect® - WAW285H2UC





Installation Details

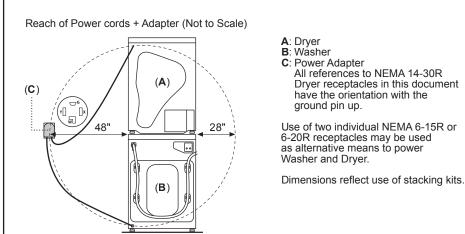

All references to NEMA 14-30R Dryer receptacles in this document have the orientation with the

Use of two individual NEMA 6-15R or 6-20R receptacles may be used as alternative means to power



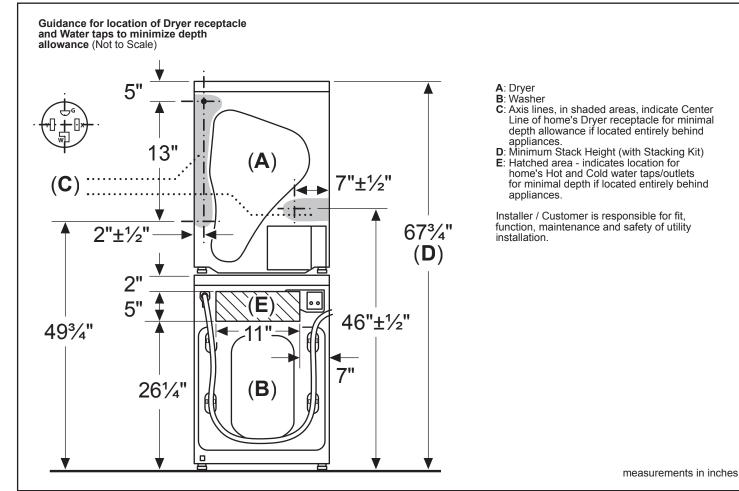

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST). Sat 6 am to 3 pm PST). Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without


notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

800 Series Washer with Home Connect® - WAW285H2UC




Installation Details

Closet: Stacked Washer and Condensing Dryer



Closet: Stand Alone (shown) or Side by Side



Minimum clearance requirements

(Stacked, Stand Alone or Side by Side):

- A: Both sides (left and right) 5/8
- **B**: Top $-6\frac{1}{4}$ "
- C: Rear 21/2"
- D: Front 21/2"

Minimum louvered area and spacing:


- E: Top louver area 63 sq. in. F: Bottom louver area 63 sq. in.
- G: Lower Height (stacked) 37
- G: Lower Height (stacked) 36"

 J: Lower Height (stand alone) 3"

 K: Upper Height (stand alone) 29"

For shortest drying times keep closet door open while dryer is operating. When closet doors are closed, open areas only allow minimal drying results (expect long drying times).

Closet: Stacked Washer with Heat Pump Dryer



Minimum clearance requirements

(Stacked, Stand Alone or Side by Side):

- A: Both sides (left and right) 1/2
- **B**: Top 61/4 **C**: Rear 3"
- **D**: Front ½"


Minimum door undercut (louvered area): E: Undercut height (Top and Bottom) – 1½"

- Louvered areas of equal total sizes and split between upper and lower portions of door are permitted.
- F: Undercut width (Top and Bottom):

 24" minimum for Stacked and Stand Alone
 - 48" minimum for Side by Side

For shortest drying times keep closet door open while dryer is operating. When closet doors are closed, open areas only allow minimal drying results (expect long drying times).

Under Counter (Preferred)




Minimum opening dimensions:

- **A**: Depth 28" **B**: Width 231/8"

Front of appliance fully open.

C: Height - 341/2" No doors or coverings.

Under Counter Enclosed (Less Preferred)



If the front of the appliance is covered, louvered openings must be installed as shown and front/rear clearances adhered to according to closet installations.

Minimum louvered area and spacing:

- E: Top louver area 63 sq. in.
- F: Bottom louver area 63 sq. in.
- G: Lower Height 3"
- H: Upper Height 14"

For shortest drying times keep cabinet door open while dryer is operating. When cabinet door is closed, open areas only allow minimal drying results (expect long drying times).

measurements in inches

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST). Sat 6 am to 3 pm PST). Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.