

# SEP-200

## SEP-200 INDOOR / OUTDOOR SERVICE ENTRANCE PROTECTOR For Residential and Light Commercial Use

AC surge protector permanently connected to main service panel. SEP-200 SERVICE ENTRANCE PROTECTOR features a compact chassis, visible diagnostic LED and easy installation.

- Rated for split/single phase panels up to 400 Amps
- 3 Wires Plus Ground
- Meets ANSI C62.41 Requirements.
- 700V L-N / 800V N-G Voltage Protection Rating, UL 1449 3rd Edition
- 5-Year, Product Warranty
- Install Indoors or Outside
- 3-year, \$10,000 Appliance Policy




### PROTECTS MAJOR APPLIANCES FROM CATASTROPHIC SURGES...EVEN LIGHTNING!

SEP-200 protects against electrical surges that can cause damage to major appliances including their sensitive electronic circuitry.

Catastrophic failures and gradual component degradation can be caused by high voltage surges, which are generated by harsh weather conditions, external power problems, or day-to-day electrical component switching.

Panamax also recommends using secondary plug-in protectors at the equipment you would like to protect.

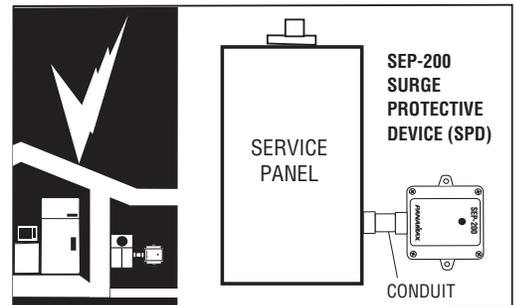

*For use before or after the main disconnect for optimum lightning protection.*



**PANAMAX** [www.panamax.com](http://www.panamax.com) • 800-472-5555

WEIGHTS & MEASUREMENTS, QUANTITIES, UPC'S FOR ORDERING & SHIPPING		
<b>SINGLE MODEL SEP-200</b>		
Dimensions	Weight	
L 5.5" x H 2.5" x W 5.5"	1.25 lbs.	
<b>SINGLE UNIT CARTON (QUANTITY 1)</b>		
Dimensions	Weight	UPC
L 8" x H 3" x W 8"	1.5 lbs.	050616-008563
<b>MASTER CARTON (QUANTITY 6)</b>		
Dimensions	Weight	UPC
L 17" x H 8" x W 11"	10 lbs.	50050616008568