



# INCOGNEETO™ INDUCTION WARMER

*Viking Professional 5 Series – VUIW*

## TRUE COMMERCIAL TECHNOLOGY FOR THE HOME

- Offers four selectable temperature settings: 150°/160°/175°/190°F (65°/70°/80°/85°C)
- 650 watts of power
- The Magneeto™ II trivet-like device is used on the upper surface of the countertop to locate the heat zone and acts as a temperature sensor
- Touch control user interface with SmarTag™ Technology uses a wireless communicator to provide precise temperature control
- Cookware/bakeware up to a diameter of approximately 12" (30.5 cm) with an induction compatible base can be used
- Automatic pan detection allows for instant energy transmission to pan and no energy transmission when pan is not present
- Can combine up to three units per 15 amp circuit



## EASY INSTALLATION

- A beautiful piece of natural stone or "engineered stone" can transform into an induction warmer capable of holding food within 2°F
  - Designed to be mounted directly under stone or engineered stone countertops
  - The unit mounts underneath the counter with no drilling or cutting of the stone required
- Compatible with all natural and engineered stones
  - 1-1/4" thick with no substrate
  - 3/4" thick with 1/2" – 3/4" plywood substrate



## MODEL NUMBERS

- VUIW518 – 18"W. Undercounter Induction Warmer

## COLOR FINISHES

- Stainless housing with black glass (unit to be hidden under countertop)

## WARRANTY

- 1-year full covers complete unit
- 90-day full – cosmetic parts such as glass, painted items, and decorative items





# INCOGNEETO™ INDUCTION WARMER

Viking Professional 5 Series – VUIW

INCOGNEETO™ INDUCTION WARMER	
DESCRIPTION	VUIW518
Dimensions	17.5" x 17.5" x 4.5" (44.5 x 44.5 x 11.4 cm)
Power Range	100-650W
Amperage	5A (max)
Voltage	100-120VAC, 50/60 Hz
Power Requirements	100-120VAC, 1Ph
Preset Temperatures	150, 160, 175, 190°F/65, 70, 80, 85°C
Approximate Shipping Weight	20 lb. (9 kg)

Please do not prepare installation from brochure data only. See installation instructions for important clearance/installation information.

Dimensions	
A	17-1/2" (4.5 cm)
B	4-1/2" (1.8 cm)
C	2-7/8" (7.4 cm)
D	2-1/4" (5.7 cm)
E	3-1/4" (8.3 cm)
F	1-3/16" (3.0 cm)
G	2-1/2" (6.3 cm)
H	3-13/16" (9.7 cm)
I	1" (2.5 cm)

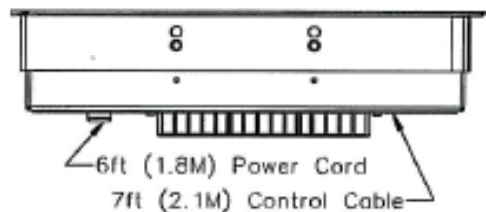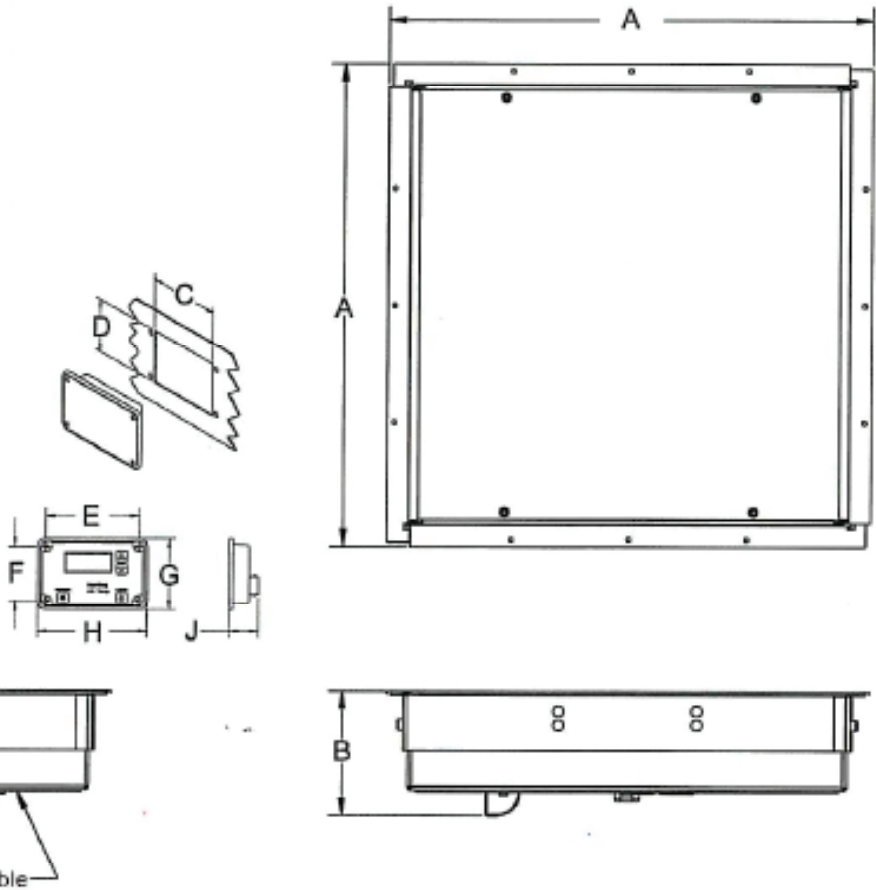

VIKING RANGE, LLC 111 FRONT STREET GREENWOOD, MISSISSIPPI 38930 USA

For detailed product information, model numbers, or to request a quote call 1-888-845-4641 or visit [vikingrange.com](http://vikingrange.com)  
© 2015 Viking Range, LLC All rights reserved. Specifications subject to change without notice.