
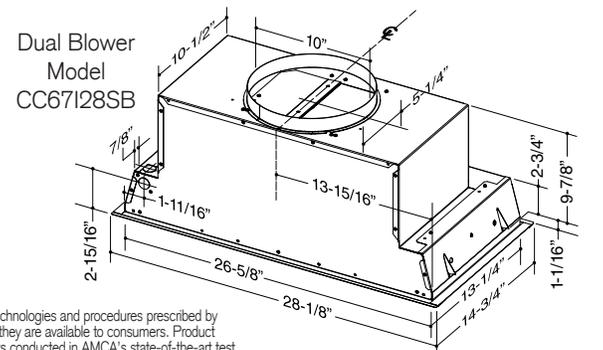
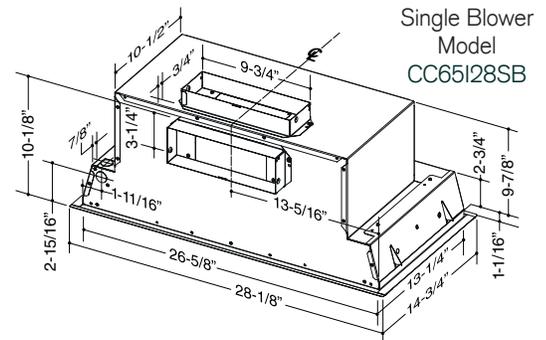
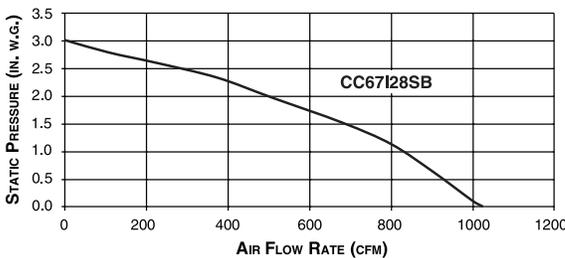


BLOWER	MODEL	REPLACEMENT GREASE FILTERS
Single	CC65I28SB	18428
Dual	CC67I28SB	18428

PERFORMANCE								
Blower	Duct Size & Discharge	Volts	Hz	Amps	Sones		CFM	
					Low	High	Low	High
Single	3¼-in. x 10-in. Vertical	120	60	3.0	2.0	11.5	200	570 ‡
	3¼-in. x 10-in. Horizontal	120	60	2.9	2.0	10.5	190	570 ‡
Dual	10-in. Round	120	60	9.5	1.5	12.0	370	1000 ‡

‡ If needed, ask a recommended installer to limit discharge to 300 CFM.

FEATURES	
Finish	430 Stainless Steel
Cooktop Lighting	2 LED Modules - 120V, 5.5W
Grease Filters	Hybrid Baffle, Stainless Steel with Aluminum Mesh - Dishwasher Safe
Damper	3¼-in. x 10-in. (Included with CC65) 10-in. Round (Included with CC67)
OPTIONAL ACCESSORIES	
30" Liner	ALCC630SB
36" Liner	ALCC636SB
42" Liner	ALCC642SB
CFM Reducer Kit	ARP310 (for use with CC65)
MOUNTING HEIGHT	
24-in. to 30-in. from cooktop to bottom of hood	
LIMITED WARRANTY	
5-year (See installation manual for full warranty text.)	
FOR INDOOR USE ONLY	

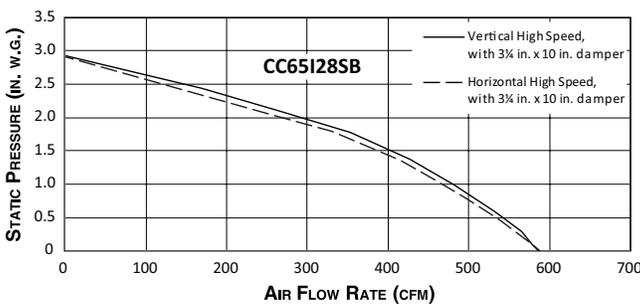

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.