### FRIGIDAIRE GALLERY

**AVAILABLE** 

**COLORS** 

## FGHN2868T F/P/E

#### Smudge-Proof™ Stainless Steel



## SIGNATURE FEATURES



#### Crisp Seal™

Sealed humidity-controlled crispers maintain moisture for market-fresh produce.



### PureSource Ultra® II Ice & Water Filtration

Discover how our genuine filtration works to keep your water cleaner. PureSource Ultra® II Water Filters remove 99.3% of lead and 99.9% of cysts from your household water.



#### **Effortless™ Glide Crisper Drawers**

Our humidity-controlled crisper drawers can be configured any number of ways, either side-by-side or stacked on top of each other so you can organize your refrigerator the way you want.



#### PureAir Ultra® II Filters

Our PureAir Ultra® II air filters effortlessly keep the air in your refrigerator fresh.

# FRENCH DOOR REFRIGERATOR

27.6 CU. FT. STANDARD-DEPTH

#### PRODUCT DIMENSIONS

Height (Including Hinges & Rollers) 69-7/8"

Width (Doors) 36"

Depth (Including Door) 33-3/8"

#### MORE EASY-TO-USE FEATURES

#### Even Temp™

Even temperature throughout the refrigerator.

#### Adjustable Interior Storage

Over 100 ways to organize and customize your refrigerator.

#### Multi-Level LED Lighting

Corner-to-corner LED lighting throughout the refrigerator for better visibility.

#### Store-More™ Shelves

More space to store your food with edge-to-edge shelves.

#### Full-Width Cool-Zone™ Drawer

A large capacity Cool Zone™ drawer extends completely and provides space to easily store anything from sheet cakes and large platters to snacks and juice boxes.

#### Express-Select® Controls

Easily select options with the touch of a button.

#### Freezer Basket with Divider

Deep freezer storage with adjustable divider keeps food organized and accessible.

#### Effortless™ Glide Freezer Drawers

Drawers glide out smoothly and fully extend, giving you easy access to what's inside.

#### Quick Freeze

Quickly freeze foods so they stay at their freshest.

#### Store-More™ Bins

Our bins are designed to store more, so you can fit gallon size beverages.

#### **CERTIFICATIONS**

**ENERGY STAR®** 



Star-K® Certified (Sabbath Mode)



#### **FEATURES**

Door Design	Tall Soft-Arc	
Door Handle Design	Stainless (F), Color-Coordinated (P/E)	
Cabinet Finish	Grey (F), Color-Coordinated (P/E)	
Door Stops/Door Closers	Yes/Yes	
Door Hinge Covers	Hidden	
Rollers - Front/Rear	Adjustable/Yes	
Water Filter Location	Top-Right Fresh Food Section	
Sound Package		

#### **CONTROL FEATURES**

Controls	Express-Select*	
Control Panel Location	Left Door, Inside Edge	
Number of Control Buttons	tons 11	
Ice Option/Freeze Option	Quick Ice/Quick Freeze	
Display On/Off Option		
Lock		
Temp/Door Ajar/Power Failure Alerts	ar/Power Failure Alerts Yes/Yes/Yes	
Water Filter Change Indicator Light	Yes	
Air Filter Change Indicator Light	Yes	

#### REFRIGERATOR FEATURES

TEL TRIBETORI EXTRIBUTES	
Lighting	Multi-Level Designer LED
Water Filter Type	PureSource Ultra® II
Air Filter Type	PureAir Ultra® II
Quarter-Width Fixed Shelves	
Half-Width Fixed Shelves	4 Store-More™
Quarter-Width Sliding Shelves	
Half-Width Sliding Shelves	
Cantilever Shelves	Yes
Store-More™ Full-Width Drawer	1 Cool Zone™
Hanging Wine Rack/Can Dispenser	
Crisper Drawer/Humidity Controls	2 Clear/2
Store-More™ Fixed Door Bins	2 Clear
2-Liter Fixed Door Bins	
Gallon Adjustable Door Bins	4 Clear
2-Liter Adjustable Door Bins	2 Clear
Dispenser Bin	
Non-Slip Bin Liner/Bottle Retainers	Yes/No

#### FREEZER FEATURES

CERTIFICATIONS			
Ice Maker	Yes		
Lighting	LED		
Basket Dividers	1 (Bottom Basket)		
Sliding Full-Width Freezer Baskets	2 Effortless™ Glide		
Self-Closing Pull-Out Drawer	Yes		

#### ENERGY STAR®


Shipping Weight (Approx.)

Star-K® Certified (Sabbath Mode)	Yes
SPECIFICATIONS	
Total Capacity (Cu. Ft.)	27.6
Refrigerator Capacity (Cu. Ft.)	18.9
Freezer Capacity (Cu. Ft.)	8.7
Power Cord Connection Location	Right Bottom Rear
Water Inlet Connection Location	Left Bottom Rear
Voltage Rating	120V/60Hz
Connected Load (kW rating) @ 120 Volts <sup>1</sup>	1.02
Amps @ 120 Volts	8.5
Minimum Circuit Required (Amps)	15

'For use on adequately wired 1201, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

#### PRODUCT DIMENSIONS

A-Height (Including Hinges & Rollers)	69-7/8"
B-Cabinet Width/Door Width	35-7/8"/36"
C-Depth (Including Door)	33-3/8"
Depth with Door Open 90°	47-3/8"
Depth with Drawer Fully Extended (Including Handle)	55"

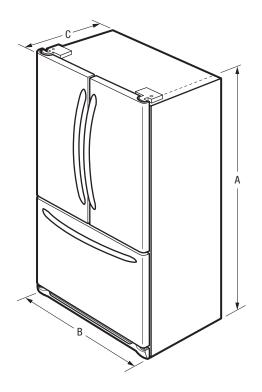




Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes.

Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca

Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca

365 Lbs.



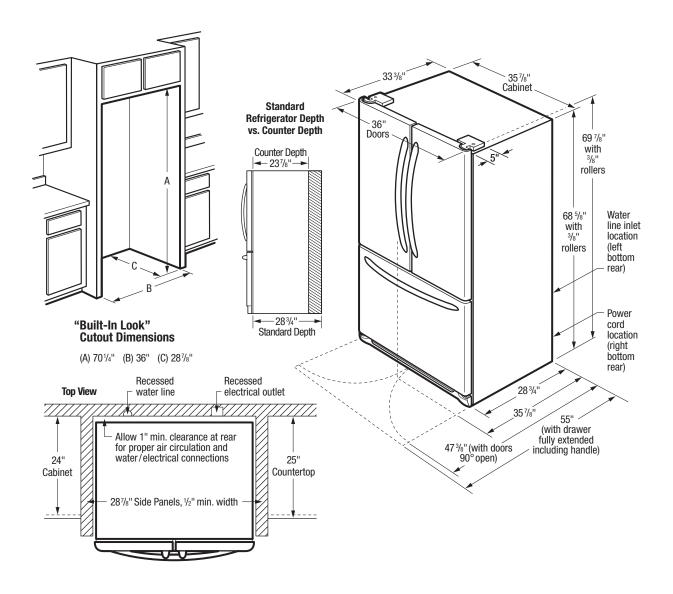

### INSTALLATION SPECIFICATIONS

- Product Shipping Weight (approx.) 365 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.
- Voltage Rating 120V/60 Hz
- Connected Load (kW Rating)@120 Volts = 1.02 kW
- Amps @ 120 Volts = 8.5 Amps
- Always consult local and national electric & plumbing codes.
- Floor should be level surface of hard material, capable of supporting fully loaded refrigerator.
- When installing refrigerator adjacent to wall, cabinet or other appliance that
  extends beyond front edge of unit, 20" minimum clearance recommended
  to allow for optimum 120° to 180° door swing, providing complete
  drawer/crisper access and removal. (Absolute 4-1/2" minimum clearance will
  ONLY allow for 90° door swing which will provide drawer/crisper access with
  restricted removal.)
- To ensure optimum performance, avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.

- For proper ventilation, front grille MUST remain unobstructed.
- Recess electrical outlet when possible.
- Water recess on rear wall recommended to prevent water line damage.
- Water Pressure Cold water line must provide between 30 and 100 pounds per square inch (psi).
- Copper tubing with 1/4" O.D. recommended for water supply line with length equal to distance from rear of unit to household water supply line plus 7 additional feet. Optional Water Supply Installation Kits available.
- Adjustable front rollers to assist with door alignment.

#### "BUILT-IN LOOK" SPECIFICATIONS

- Minimum opening of 70-1/4" H  $\times$  36" W  $\times$  28-7/8" D required to allow for ease of installation, proper air circulation, and plumbing/electrical connections.
- Remove all wall/floor molding prior to installation.



Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes.

Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca

Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca