





## FULL SIZE REFRIGERATOR

30" Refrigerator (Right or Left Hinged) With Solid Stainless Steel Door or Stainless Glass Door

The 30" Refrigerator Column offers homeowners the freedom to design kitchens that look the way they want and, as importantly, reflect the way they live. Paired with a 30" Freezer, a 30" Wine Column, or even with one of our side-by-sides, the 30" Refrigerator Column means complete control and complete freedom, and for homeowners and designers alike, that means complete luxury.



## 30 INCH REFRIGERATOR COLUMN



TR-30REF-R-SS-A  
Door Closed



TR-30REF-R-SG-A  
Door Closed

### EXCEPTIONAL FEATURES

Industry exclusive, 300-series stainless steel interior and exterior. Stainless steel interior is antibacterial, hygienic, easy to clean, and does not retain food odors.

All stainless steel, beautifully crafted proud hinges pass True's rigorous one million door opening test.

Beautifully crafted solid stainless steel door with 120° stay-open feature and ergonomically designed, robust, tubular handle.

Commercially inspired lift-up grill on top of the unit with toe kick that complements the look of True's undercounter units.

Ramp-up, showcase interior LED lighting provides amazing illumination throughout.

Low-E, double pane, UV tinted glass on glass door models.

Intuitive True Precision® Control and readout provides digital accuracy and easy operation.

Balanced, forced-air refrigeration system enables proper airflow and even temperature throughout to keep food fresh.

### ORGANIZATION

4 adjustable/removable stainless steel encapsulated glass shelves.

3 stainless steel soft-close drawer bins with polycarbonate fronts and integrated handles.

3 adjustable/removable stainless steel door bins.  
(Solid door only)

### OPTIONAL ACCESSORIES

Side panels - Required for exposed side installation.

60" joining kit - 60" cohesive grill & toe kick when installing (2) units together

90" joining kit - 90" cohesive grill & toe kick when installing (3) units together

### ELECTRICAL SPECIFICATIONS

Voltage: 115/60/1

Amps: 2.0


Power Cord Length: 8'

Annual kWh Consumption TR-30REF-R-SS: 307

Annual kWh Consumption TR-30REF-R-SG: 345



## PLAN VIEW

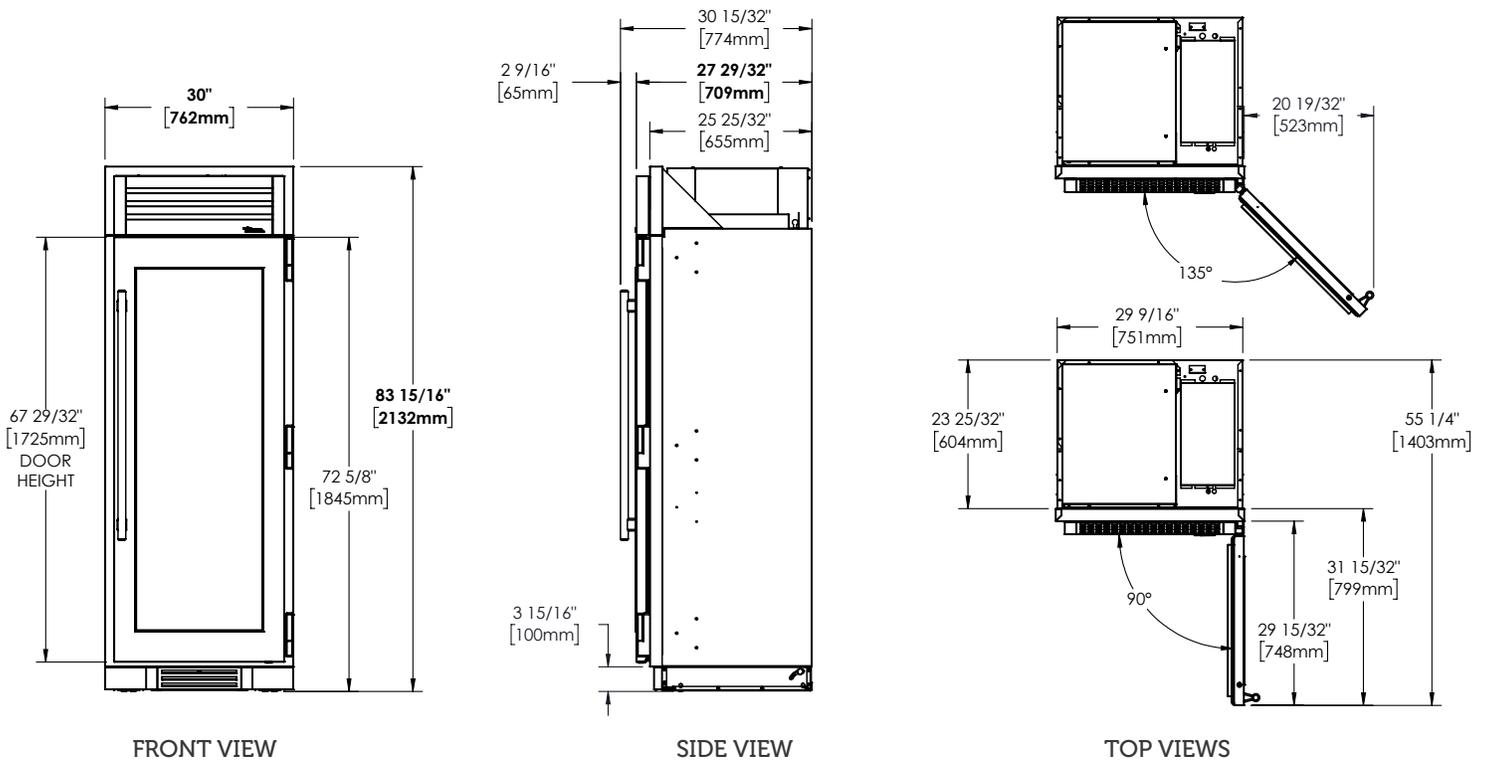


Dimensions may vary by ± 1/8"

### FLUSH OPENING DIMENSIONS

Width	Depth†	Height
30 1/4"	26"	84 1/4"


TOP VIEW  
FIGURE 1 ROUGH OPENING

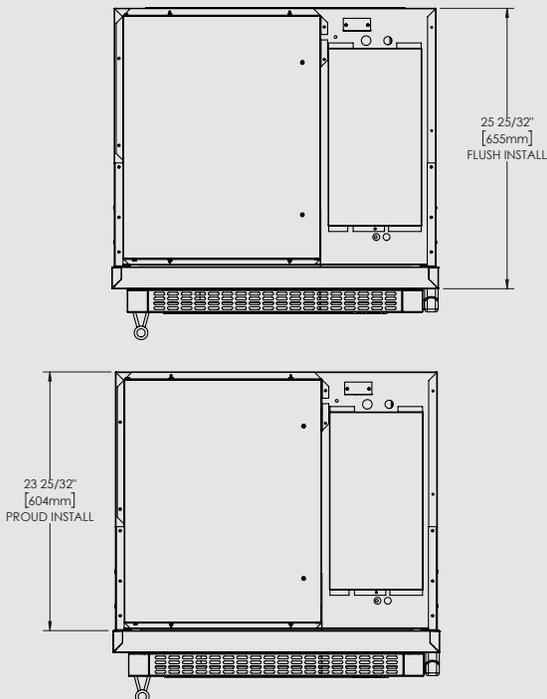

### PROUD OPENING DIMENSIONS

Width	Depth†	Height
29 3/4"	24"	84"

FRONT VIEW  
FIGURE 2 ROUGH OPENING

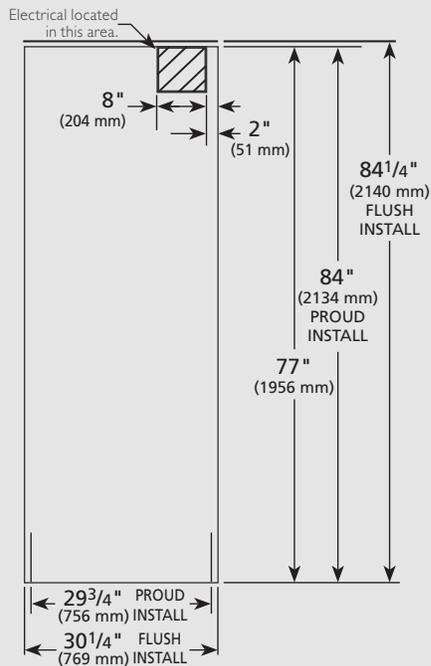

### SPECIFICATIONS

Width	30"
Depth†	28"
Height	84"
Shelving	4 adjustable/removable stainless steel encapsulated glass shelves. 3 stainless steel soft-close drawer bins with polycarbonate fronts and integrated handles. 3 adjustable/removable stainless steel door bins (Solid door only).
Flush Opening Width	30 1/4"
Flush Opening Depth	26"
Flush Opening Height	84 1/4"
Proud Opening Width	29 3/4"
Proud Opening Depth	24"
Proud Opening Height	84"
Weight**	TBD lbs

†Depth does not include 2 7/8" for door handle.  
 \*\*Because of the weight of this unit, it is recommended to consult a flooring expert prior to installation. The flooring beneath the unit should be rated to support at least 150 pounds per square foot.