# 15" SIGNATURE SERIES REFRIGERATOR

HP15RS-3 | 15" INDOOR MODEL HP15RO-3 | 15" OUTDOOR MODEL













## GENERAL SIGNATURE SERIES FEATURES

- Zero-clearance hinging allows for abutment with surrounding cabinetry
- Best in Class 525 Btu commercial-grade compressor
- Front-vented, RAPIDcool forced-air refrigeration system
- Commercial-grade stainless steel interior and exterior
- Industry Exclusive convertible door design allows all doors the ability to be converted to wood overlay from stainless steel
- *Industry Exclusive* adjustable, full-extension pull-out shelves (drawer models and beer dispenser excluded)
- Stainless-steel ball-bearing glides provide smooth movement of shelves
- Adjustable Crisp White and Cool Blue LED lighting

- Low E, UV-coated glass provides industry leading insulation and protection.
- State-of-the-art digital control module
- Optional door locks and Industry-Exclusive drawer locks (factory installed)
- Stacking kit available
- Indoor and outdoor models available
- Also available 15" Beverage Center, Wine Reserve, Beer Dispenser and Clear Ice Maker
- 2.8 cubic feet of capacity
- Industry Best Three Year Warranty plus additional three years on sealed system

#### HP15RS-3/RO-3 FEATURES

- Available with solid stainless steel door, solid wood overlay door, stainless steel glass door or wood overlay glass door
- Refrigerator rated for both food and beverage storage
- Includes two (2) full-extension pull-out shelves
- Refrigerator temperature 33°- 42°F

Form No.HP15R-3 Rev. 01.15.2016

#### **PRODUCT SPECIFICATIONS**

| Overall Width               | 14-7/8" (37.78 cm)             |
|-----------------------------|--------------------------------|
| Overall Height              | 34-1/4" (86.96 cm)             |
| Overall Depth               | 24" (60.96 cm.)                |
| Opening Width               | 15" (38.1 cm.)                 |
| Opening Height              | 34-3/8" (87.31 cm.)            |
| Opening Depth               | 24" (60.96 cm.)                |
| Refrigerated Volume         | 2.8 cu. ft.                    |
| <b>Door Swing Clearance</b> | 16" (40.64 cm) minimum         |
| Electrical                  | 115V, 60Hz., 1 Phase, 2.3 amps |
| Plumbing                    | None Required                  |
| Shipping Weight             | 150 lbs (68.04 kg)             |
| Annual Energy Usage         | 280 kWh/yr                     |


#### **INDOOR MODELS**

| HP15RS-3-1L* | Solid stainless steel door, hinge left |
|--------------|--|
| HP15RS-3-2L* | Solid wood overlay door, hinge left    |
| HP15RS-3-3L* | Stainless steel glass door, hinge left |
| HP15RS-3-4L* | Wood overlay glass door, hinge left    |
| HP15RS-3-5   | Stainless Steel Drawers                |
| HP15RS-3-6   | Wood Overlay Drawers                   |

### **OUTDOOR MODELS**

| HP15RO-3-1L* | Solid stainless steel door, hinge left |
|--------------|--|
| HP15RO-3-2L* | Solid wood overlay door, hinge left    |
| HP15RO-3-3L* | Stainless steel glass door, hinge left |
| HP15RO-3-4L* | Wood overlay glass door, hinge left    |
| HP15RO-3-5   | Stainless Steel Drawers                |
| HP15RO-3-6   | Wood Overlay Drawers                   |

<sup>\*</sup> Also available hinge right

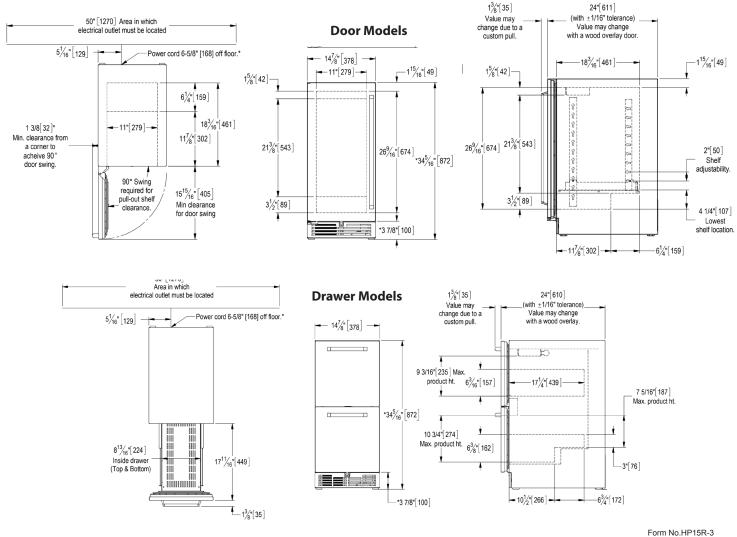

Form No.HP15R-3 Rev. 01.15.2016