


# Leone

## Wallmount hood



Learn  
more

### MEASUREMENTS

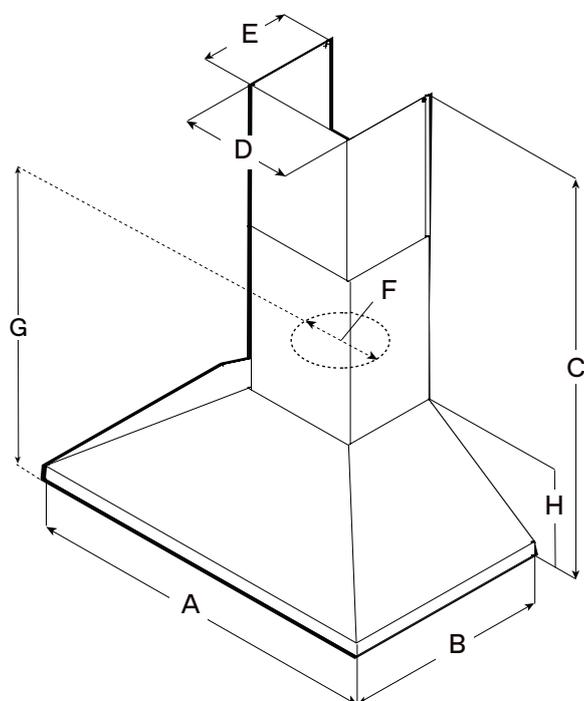

	ELN630S2	ELN636SS* ELN136S2**	ELN142S2	ELN148SS
A	30" (76 cm)	36" (91.4 cm)	42" (106.7 cm)	48" (121.9 cm)
B	24" (61 cm)			
C	Max: 47 5/8" (121.6 cm) Min: 30" (76.2 cm)			
D	13 1/8" (33.2 cm)			
E	10 5/8" (27 cm)			
F	6" (15.2 cm)	6" (15.2 cm)* 8" (20.3 cm)**	8" (20.3 cm)	8" (20.3 cm)
G	16 7/8" (42.9 cm)			
H	12 3/16" (12.2 cm)			

### DESCRIPTION

Give a splash of Italian design to your professional kitchen with Leone's crisp lines, seamless welded corner craftsmanship, beveled rim and gleaming stainless steel.

Leone has the extra depth (24") and power (1200 CFM on 36", 42" & 48" W) & 36" in 600 CFM needed to support professional ranges and cooktops. No ear plugs required with Leone's HUSH sound suppression system, which enables you to comfortably talk and entertain, even when cooking up a storm.

Available in 30", 36" and 42" widths, Leone features backlit hidden knob controls which operate the 4-speed blower and LED lighting.



### FEATURES

-  Hush system
-  Heat guard
-  Professional performance
-  Grease collectors
-  Seamless look



### GENERAL PROPERTIES

Width	30"	36"	42"	48"
Model	ELN630S2	ELN636SS* ELN136S2**	ELN142S2	ELN148SS
Dimensions	30"Wx24"Dxmin30"max47 <sup>5</sup> / <sub>8</sub> "H	36"Wx24"Dxmin30"max47 <sup>5</sup> / <sub>8</sub> "H	42"Wx24"Dxmin30"max47 <sup>5</sup> / <sub>8</sub> "H	48"Wx24"Dxmin30"max47 <sup>5</sup> / <sub>8</sub> "H
Blower Type <sup>1</sup> (Internal)	600 CFM (4-speed)	600 CFM (4-speed)* 1200 CFM (4-speed)**	1200 CFM (4-speed)	1200 CFM (4-speed)
Noise (Min-max sones) <sup>1</sup>	1.7-7.0 Sones	1.7-7.0 Sones* 1.7-8.5 Sones**	1.7-8.5 Sones	1.7-8.5 Sones
Electrical	120V-60Hz,463W*	120V-60Hz,490W* 120V-60Hz,913W**	120V-60Hz,913W	120V-60Hz,913W
Illumination	2 LED Lights, 6.5W, 3000K, 540 Lumen/Lamp			
Finish	Stainless Steel			
Controls	Fully Retractable Rotating Knobs with Blue backlighting			
Grease filters	Dishwasher-Safe, Professional Stainless Steel Baffle			
Installation type	Ducted or recirculating with Kit			
Telescopic chimney	For ceiling heights 7'6"-10'0" (over electric cooking),8'0"-10'0" (over gas cooking)			
Duct transition	6" Round with Backdraft Damper (Top Only)	6" /8"*** Round with Backdraft Damper (Top Only)	8" Round with Backdraft Damper (Top Only)	8" Round with Backdraft Damper (Top Only)

### KITS

Long Chimney Ext	KIT02785 (can reach up to 13"), KIT01935 (can reach up to 11")
External Blower	KIT0153054 (1200 CFM blower, 8" or 10" compatible)
Inline Blower	KIT0154387 (1200 CFM blower, 8" or 10" compatible)
Inline Blower Shell (1200 CFM)	KIT0179549 (for use with 1200 CFM blower, 8" or 10" compatible)
Inline Blower Shell (600 CFM)	KIT0205342 (for use with 600 CFM blower, 6" compatible)
External Blower Shell	KIT0179547 (for use with 1200 CFM blowers only)
Recirculation (600 CFM)	KIT0192767 (6" round deflector) + KIT0192765 (4 round carbon filters) + KIT01936 (Duct Cover w/grates)
Recirculation (1200 CFM)	KIT0192759 (8" round deflector) + KIT0192765 (4 round carbon filters) + KIT01936 (Duct Cover w/grates)
Recirculation Duct Cover	KIT01936 (Duct covers w/recirculation grates)
Electronic CFM Reduction Bypass	KIT0185752 (Achieves <300 CFM for 600 CFM Blower) KIT0185099 (Achieves <400 CFM for 1200 CFM Blower)

**WARRANTY:<sup>2</sup> Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on [elica.com](http://elica.com)**



The product images shown are for illustration purposes only and may not be an exact representation of the product.

<sup>1</sup> CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

<sup>2</sup> For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.