

# TV2 & DV2


## COMMERCIAL THROUGH RETAIL NON-VENDED TOP LOAD WASHER & MATCHING DRYER

### Built for Reliable Performance

Huebsch® two-speed top load washers and matching dryers are durably constructed using premium materials for long-lasting, reliable performance and superior results. If you want your laundry done right, you want a Huebsch. Our machines are manufactured using metal instead of plastic. They're built with rugged, commercial-grade construction. Our world-class test lab rigorously pushes our products far beyond the conditions they're likely to ever face. We work hard at every point of our manufacturing process to ensure that our machines reflect that belief.



TV2 Control Panel

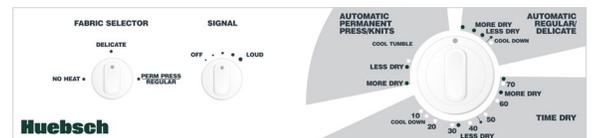

DV2 Control Panel

### Washer:

- Durable stainless steel wash tub
- Extract speed of 710 RPM spins clothes out drier
- Automatic Balancing Suspension provides the industry's best out-of-balance handling, completing wash cycles without interruption
- Curved four-vane polypropylene agitator provides 210° agitation stroke which delivers superior washability

### Dryer:

- Door is reversible for installation flexibility
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- 100% serviceable from the front
- Efficient and fast dry cycle



# COMMERCIAL THROUGH RETAIL NON-VENDED TOP LOAD WASHER & MATCHING DRYER



**TV2**



**DV2**

Product Code	TV2100WN	
Control Option	Mechanical Knob	
Color	White	
Capacity - lb (kg)	16 (7.2)	
Cylinder Volume - cu.ft. (liters)	3.19 (90.3)	
Spin Speed G-Force (RPM)	150 (710)	
Motor Size - HP (kw)	0.5 (0.37)	
Water Consumption Per Cycle - g (liter)*	27.9 (106)	
IWF (Water Factor) - gal/ft <sup>3</sup> (liters/liter/cycle)*	8.8 (1.18)	
MEF <sub>32</sub> (Modified Energy Factor) ft <sup>3</sup> /kWh/cycle (Liters/kWh/cycle)*	1.35 (38.2)	
Available Water Temperatures	Hot, Warm, Cold	
Available Cycles	Soak/Prewash, Heavy Duty/Permanent Press, Normal Eco, Delicate	
Electrical Requirements (v/Hz/Ph-Amp)	120/60/1 - 15 Amp	
Water Pressure - p.s.i (bar)	20-120 (1.4/8.3)	
Drain	Pump	
Cylinder Finish	Stainless Steel	
Net Weight - lb (kg)	186 (84.4)	
Shipping Weight - lb (kg)	196 (88.9)	
Shipping Dimensions Approx. - in	Width	28.25
	Depth	30
	Height	45
Agency Approvals	cULus	
Model No.	YWN432SP115CW01	

Product Code	Electric: DV2100WE	
Control Option	Mechanical Knob	
Color	White	
Capacity - lb (kg)	18 (8.2)	
Cylinder Volume - cu.ft. (liters)	7.0 (198)	
Motor (Thermal Protected)	0.33 HP	
Air Outlet Diameter - in	4	
Exhaust Airflow - cfm (liters/sec)	220 (105)	
Available Cycles	Automatic Permanent Press/Knits, Automatic Regular/Delicate, Time Dry	
Electrical Requirements	**Electric 120/208/240/60/1-30 Amp	
Heating Element	Electric 5000W, 240V / 4250W, 208V	
Net Weight - lb (kg)	130 (58.9)	
Shipping Weight - lb (kg)	140 (63.5)	
Shipping Dimensions Approx. - in	Width	30.5
	Depth	29.5
	Height	45
Agency Approvals	cULus	
Model No.	YDE3TRGS171CW01	

Dimensions	Width - in	Height - in	Depth - in	Floor to Door Opening - in	Door Swing - in
<b>TV2100WN</b>	25.625	43	28	53	-
<b>DV2100WE</b>	26.875	43	28	15.44	23.5

## For Commercial Use Only

\* Average usage based on multiple load sizes and current DOE test protocol. Real usage will vary depending on load size, composition and cycle selectivity.

\*\* Electric dryers are dual rated for 208-240V applications. Using dryer in 208V will reduce the wattage output. An optional kit (965P3) can be used to field convert the unit for 4250 output at 208V.

For the most accurate information, the installation guide should be used for all design and construction purposes.

Due to continuous product improvements, design and specifications are subject to change without notice.

The quality management systems of Alliance Laundry Systems are registered to ISO 9001.