

LG STUDIO

LTIS7338XE

7.3 cu. ft. Smart Wi-Fi Enabled Electric Double Oven Slide-In Range with ProBake® Convection and EasyClean®

Electric Double Oven

LED Display

Glass SmoothTouch™

2 - Year Limited Warranty

Induction Cooktop w/ Flex Zone

Energy Star® Qualified



Enjoy new ways to control your home with LG smart appliances

LG ThinQ®

- Install Setup Quick Check
- Preventative Alerts & Guidance
- Performance & Usage Reports




CAPACITY	
Type	Electric Double Oven
Oven Capacity (cu.ft.)	7.3
Color	Stainless Steel
ENERGY	
ENERGY STAR® Qualified	Yes
COOKTOP	
Type	Induction + Radiant
No. of Radiant Elements	5 (4 Inductions, 1 Radiant)
Element Size/Wattage - Left Rear	3300(Boost) / 1650(Normal) (7")
Element Size/Wattage - Right Rear (Warm Zone)	100 (6")
Element Size/Wattage - Left Front	3300(Boost) / 1650(Normal) (7")
Element Size/Wattage - Right Front	4300(Boost) / 2400 (Normal) (11")
Element Size/Wattage - Center Rear	1800(Boost) / 1300 (Normal) (6")
Hot Surface LED Indicator	Yes
UPPER OVEN FEATURES	
Configuration	Electric
Broil Element (Watts/h)	Sheathed Heater 3,800W
Bake Element (Watts/h)	2400W / 4 Pass (Exposed)
Oven Cooking	Conventional
Oven Modes	Warm, Broil, Bake, EasyClean®, Self Clean
Oven Control Features	Glass Touch (SmoothTouch™)
EasyClean®	Yes
EasyClean® time	10 Mins.
Self Clean	Yes
GoCook Smart Oven Light	Yes
No. Of Rack Positions	2
Door Lock	Yes



LOWER OVEN FEATURES	
Broil Element (Watts)	3800W / 6 Pass
Convection Type	ProBake Convection®
Convection Burner (Watts)	2500W / 2 Turn (ProBake Convection®)
Convection Conversion	Yes
Oven Modes	Bake, Conv. Bake, Conv. Roast, Warm/Proof, Broil, Frozen meal, Air Fry, Air Sous-vide, EasyClean®, Self Clean, Remote Start, Delayed Timed Cook, Timed Cook
Oven Control Features	Glass Touch (SmoothTouch™)
EasyClean®	Yes
EasyClean® time	10 Mins.
Self Clean	Yes
GoCook Smart Oven Light	Yes
No. Of Rack Positions	4
Door Lock	Yes
Auto Safety Shut-Down	After 12 Hours
CONTROL FEATURES	
Cooktop Control Type	Front Control Knobs
Flex Control Knob	Yes
Oven Control Type	SmoothTouch™ Glass
Display	LED / White
Language	English
Clock	Yes
Temperature Unit of Measure	Fahrenheit / Celsius
Cooking Complete Reminder Volume	Beep (Hi, Lo, Off)
Certified Sabbath Mode	Yes
APPEARANCE	
All Available Colors	Stainless Steel
Handle/Knobs Colors	Stainless Steel
Handle/Knobs Materials	Aluminum / PC+ABS
Handle Type	Bar Type
Oven Door Feature	InstaView® & WideView™ Window
PrintProof™ Finish	Yes
Cooktop Finish	Black Ceramic + Grey Pattern

Accessories	Gliding Rack (1), Heavy Duty Rack (2), Air Fry Tray (1), Temperature Probe (1), Cooktop Cream / Cleaner, Broiler pan & Grid, Pizza Stone & Peel
SMART FEATURES	
ThinQ® (Wi-Fi Enabled)	Yes
ThinQ UP	Yes
Check & Control	Yes
Voice Control	Google Assistant & Amazon Alexa
Smart Recipe (3rd Party Recipe App)	Sidechef
Proactive Customer Care	Yes
SmartDiagnosis™	Yes
NFC Tag On	No
DIMENSIONS / CLEARANCES / WEIGHT	
Shipping Weight (lbs)	257.94
Product Weight (lbs)	208.34
Cabinet Width (in)	30"
Overall Depth (in) - without Handle	26 7/8"
Overall Depth (in) - Including Handle	29 3/8"
Overall Width (in)	29 7/8"
Upper Oven Dimensions (in) (W x H x D)	24 13/16" x 10 13/16" x 19 13/16"
Lower Oven Dimensions (in) (W x H x D)	24 13/16" x 14 1/4" x 19 15/16"
Height to Cooking Surface (in)	36"
Carton Dimensions (in) (W x H x D)	32" x 42 1/16" x 29 15/16"
POWER / RATING	
Amp at 208 V	56.5 / 65.0
kW at 208V / 240V	12.7 / 15.5
Required Power Supply	40A
LIMITED WARRANTY	
Parts & Labor	2 Years
UPC CODES	
LTIS7338XE	48231348850

## LTIS7338XE

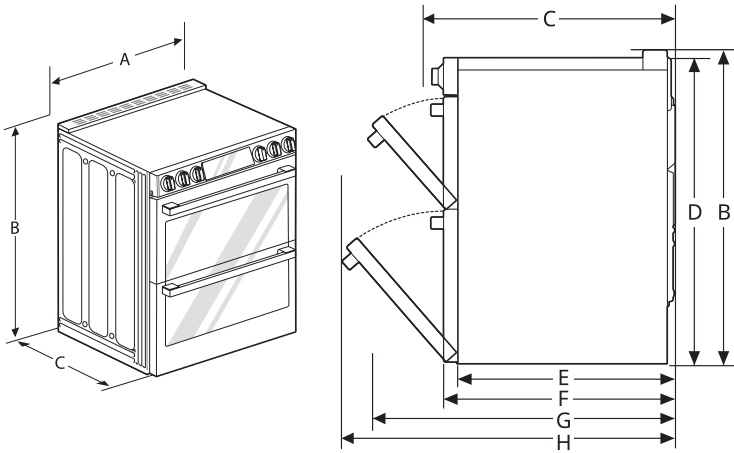

-	DIMENSIONS	LTIS7883XE
A	Width	29 7/8" (758.8mm)
B	Height	36 1/2" (927.9mm)
C	Depth (Includes Door Handle)	29 3/8" (745.2mm)
D	Height (Excludes Vent Trim)	36" (913.0mm)
E	Depth (Includes only the product body that is loaded into the cabinet. Excludes door, drawer, and handles)	24 3/4" (629.4mm)
F	Depth (Excludes Door Handle)	26 7/8" (683mm)
G	Depth when upper door is fully opened	38 5/8" (981.2mm)
H	Depth when lower door is fully opened	42 3/16" (1072.2mm)

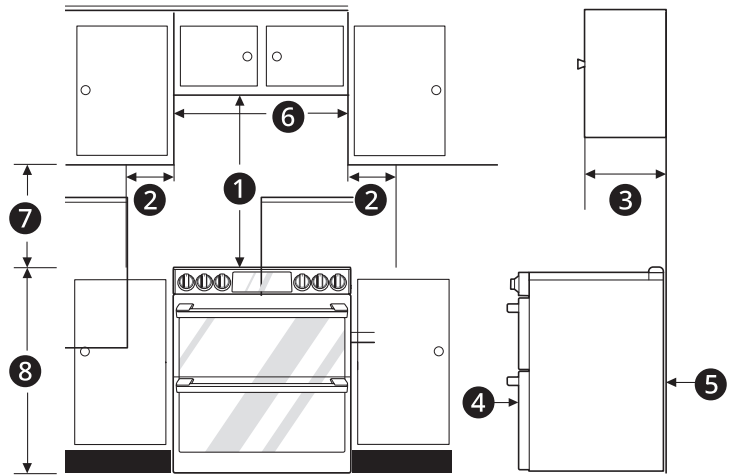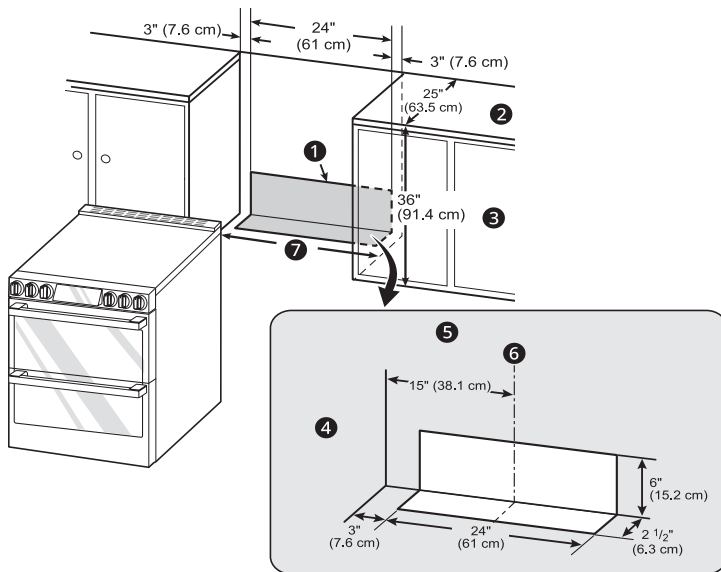

## MINIMUM DIMENSIONS

1	Minimum distance from top of range to combustible surface overhead	30" (76.2cm)
2	Minimum clearance to left/right wall	5" (12.7cm)
3	Maximum depth for cabinets above countertops	13" (33.0cm)
4	Front edge of the range side panel forward from cabinet	2 1/4" (6.3cm)
5	To cabinets below cooktop and at the range back	0"
6	Minimum opening in overhead cabinets	30" (76.2cm)
7	Minimum distance from countertop to overhead cabinets at side	15" (38.1cm)
8	Height of countertop	36" (91.3cm)

• 1 30" (76.2 cm) minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" (60.9 cm) minimum when bottom of wood or metal cabinet is protected by not less than 1/4" (0.64 cm) flame retardant millboard covered with not less than no. 28 MSG sheet steel, 0.015" (0.381 mm) stainless steel, 0.024" (0.610 mm) aluminum or 0.020" (0.508 mm) copper.

• 7 15" (38.1 cm) minimum between countertop and adjacent cabinet bottom.

• Important – Save for the use of the local electrical inspector.

• For installation in Canada, a free-standing range is not to be installed closer than 15/32" (12 mm) from any adjacent surface.

## DIMENSIONS / CLEARANCE

1	Acceptable Electrical Outlet Area	2	Normal Countertop Depth
3	Countertop Height	4	Cabinet
5	Wall	6	Center
7	Cabinet Opening		
	= 30" (76.2cm) For U.S.A		
	= 30" (76.2) - 31" (78.7cm) For CANADA		