TEMPEST

PRO-STYLE UNDER-CABINET

A streamlined under-cabinet pro-style range hood, Tempest I combines power, efficiency and flexibility. 650-CFM or optional 1,200-CFM blower options and high-airflow pro baffle filters (that are dishwasher-safe) ensure a lifetime

of exceptional performance. Additional options like a wireless remote control and recirculation kits for kitchens that require ductless venting ensure all you have to think about is cooking.





	INTERNAL BLOWER STANDARD
Single Blower (Included) Min Max. CFM	200 - 650
Single Blower (Included) Min Max. Sones	1 - 6
*Dual Blower (Optional) Min Max. CFM	400 - 1,200
*Dual Blower (Optional) Min Max. Sones	3.5 - 9

INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™*			
200 - 390	200 - 290		
1 - 4	1 - 3		


*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.


^{*}Dual blower only compatible with 36" and 42" models






Optional Wireless Remote Control

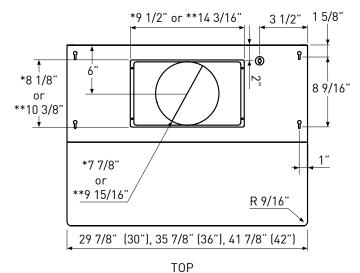



SIDE

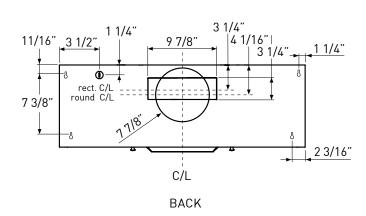

- * Single Blower Dimension
- ** Dual Blower Dimension

PRO-STYLE UNDER-CABINET



Stainless Steel					MODEL
PERFORMANCE		AK7042BS	AK7036BS	AK7000BS	Stainless Steel
Included Single Blower		42"	36"	30"	Size
ACT 390* 200-390 CFM, 1-4 sones 200-390 CFM, 1-4 sones 200-290 CFM, 1-3 sones 200-190 CFM,					PERFORMANCE
ACT 390* 200-390 CFM, 1-4 sones 200-390 CFM, 1-4 sones 200-290 CFM, 1-3 sones 200-190 CFM,	1-6 sones	200-650 CFM, 1-6 sc	200-650 CFM, 1-6 sones	200-650 CFM, 1-6 sones	Included Single Blower
Optional Dual Blower NA 400-1,200 CFM, 3.5-9 sones 400-1,200 CFM, 3.5-9 sones FEATURES ACT" Technology Yes Yes Yes Controls Electronic Touch Electronic Touch Electronic Touch Speed Levels 6** 6** 6** Auto Delay-Off Yes Yes Yes CleanAir Function Yes Yes Yes Lighting Halogen, 35W x2 Halogen, 35W x2 Halogen, 35W x2 Dual-Level Lighting Yes Yes Yes Filters Pro Baffle x2 Pro Baffle x3 Pro Baffle x3 Wireless Remote Control Option Yes, RF Yes, RF Yes, Single Blower Only Yes (with remote accessory) Yes (with remote accessory) Yes (with remote accessory) Yes (with remote accessory) DUCT SPECIFICATIONS Vertical Single Internal Blower 8" Round 8" Round 8" Round 3-1/4" x 10" or 8" Round 10" Round 10" Round Horizontal Dual	1-4 sones	200-390 CFM, 1-4 sc		200-390 CFM, 1-4 sones	ACT 390*
FEATURES ACT Technology Yes Yes Yes Yes Yes	1-3 sones	200-290 CFM, 1-3 sc	200-290 CFM, 1-3 sones	200-290 CFM, 1-3 sones	ACT 290*
ACT" Technology Yes Yes Yes Controls Electronic Touch Electronic Touch Electronic Touch Speed Levels 6** 6** 6** Auto Delay-Off Yes Yes Yes CleanAir Function Yes Yes Yes Lighting Halogen, 35W x2 Halogen, 35W x2 Halogen, 35W x2 Dual-Level Lighting Yes Yes Yes Filters Pro Baffle x2 Pro Baffle x3 Pro Baffle x3 Wireless Remote Control Option Yes, RF Yes, RF Yes, RF Dual Internal Blower Option No Yes, Single Blower Only Yes (with remote accessory) Yes (with remote accessory) DUCT SPECIFICATIONS Vertical Single Internal Blower 8" Round 8" Round 8" Round 8" Round 10" Round 10" Round 10" Round 10" Round 10" Round NA NA NA NA NA	Λ, 3.5-9 sones	400-1,200 CFM, 3.5-			Optional Dual Blower
Controls Speed Levels 6** 6** 6** 6** 6** 6** 6** 4* 6** 6**					FEATURES
Speed Levels 6** 6** 6** 6** 6** Auto Delay-Off Yes Yes Yes Yes CleanAir Function Yes Yes Yes Lighting Halogen, 35W x2 Halogen, 35W x2 Halogen, 35W x2 Dual-Level Lighting Yes Yes Yes Filters Pro Baffle x2 Pro Baffle x3 Pro Baffle x3 Wireless Remote Control Option Yes, RF Yes, RF Yes, RF Dual Internal Blower Option Recirculating Option*** No Yes, Single Blower Only Yes (with remote accessory) Yes (with remote		Yes	Yes	Yes	ACT™ Technology
Auto Delay-Off Yes Yes Yes Yes Yes Yes Lighting Halogen, 35W x2 Halogen, 35W x2 Halogen, 35W x2 Halogen, 35W x2 Dual-Level Lighting Yes Yes Yes Yes Yes Filters Pro Baffle x2 Pro Baffle x3 Wireless Remote Control Option Yes, RF Ves, RF Ves, RF Ves, RF Ual Internal Blower Option Recirculating Option*** Yes, Single Blower Only ADA Compliant Yes (with remote accessory) Yes (with remote accessory) Yes (with remote accessory) DUCT SPECIFICATIONS Vertical Single Internal Blower Horizontal Single Internal Blower NA NA NA NA AC POWER (Single Blower) 120V, 60Hz at Max. 5A AC POWER (Dual Blower) 120V, 60Hz at Max. 9A DUAL ACCESSORIES 12" Duct Cover AK0720 AK0726 Wireless Remote Control NA PBD-1200A Recirculating Blower Kit NA PBD-1200A PBD-1200A Recirculating Blower Kit NA PBD-1200A PRECIPIONAL ACCESSORIES Recirculating Blower Kit NA PBD-1200A PRECIPOLAGE PVes Pro Baffle x3 Pves Yes Yes Yes Yes Yes Yes Yes Yes Yes Y	า	Electronic Touch	Electronic Touch	Electronic Touch	Controls
CleanAir FunctionYesYesYesYesLightingHalogen, 35W x2Halogen, 35W x2Halogen, 35W x2Dual-Level LightingYesYesYesFiltersPro Baffle x2Pro Baffle x3Pro Baffle x3Wireless Remote Control OptionNoYes, RFYes, RFDual Internal Blower OptionNoYes, RFYesRecirculating Option***Yes, Single Blower OnlyYes, Single Blower OnlyYes, Single Blower OnlyADA CompliantYes (with remote accessory)Yes (with remote accessory)Yes (with remote accessory)DUCT SPECIFICATIONSVertical Single Internal Blower8" Round8" Round8" RoundHorizontal Single Internal BlowerNA10" Round10" RoundVertical Dual Internal BlowerNANANAHorizontal Dual Internal BlowerNANANAAC POWER (Single Blower)120V, 60Hz at Max. 5A120V, 60Hz at Max. 5A120V, 60Hz at Max. 9AOPTIONAL ACCESSORIES120V, 60Hz at Max. 9A120V, 60Hz at Max. 9A120V, 60Hz at Max. 9A12" Duct CoverAK0720AK0726AK0722Wireless Remote Control140000051400000514000005Dual Internal Blower KitNAPBD-1200APBD-1200ARecirculating KitZRC-7000BZRC-7036BZRC-7042B		6**	6**	6**	Speed Levels
Lighting Halogen, 35W x2 Yes Yes Pro Baffle x2 Pro Baffle x3 Pro Baffle x3 Wireless Remote Control Option Yes, RF Yes, RF Dual Internal Blower Option No Yes (with remote accessory) Performance Single Internal Blower NA NA NA AC POWER (Single Blower) DUCT SOPECIFICATIONS AC POWER (Single Blower) Pro Baffle x2 Pro Baffle x3 Pro Baffle x3 Pro Baffle x1 P		Yes	Yes	Yes	Auto Delay-Off
Dual-Level Lighting Filters Pro Baffle x2 Pro Baffle x3 Pro Baffle x3 Pro Baffle x3 Wireless Remote Control Option Yes, RF Yes, RF Yes, RF Yes, RF Yes, RF Poul Internal Blower Option No Yes Recirculating Option*** Yes, Single Blower Only Yes, Single Blower Only Yes, Single Blower Only Yes (with remote accessory) Pound Internal Blower Only Yes (with remote accessory) Pound Single Internal Blower Single Internal Blower Single Internal Blower Single Internal Blower NA NA NA NA AC POWER (Single Blower) 120V, 60Hz at Max. 5A 120V, 60Hz at Max. 5A 120V, 60Hz at Max. 9A 120V, 60Hz at Max. 9A Pound NA OPTIONAL ACCESSORIES 12" Duct Cover AK0720 Wireless Remote Control 14000005 14000005 Dual Internal Blower Kit NA PBD-1200A Recirculating Kit ZRC-7006B ZRC-7036B ZRC-7042B		Yes	Yes	Yes	CleanAir Function
Filters Pro Baffle x2 Pro Baffle x3 Pro Baffle x3 Wireless Remote Control Option Yes, RF Yes, RF Yes, RF Yes, RF Dual Internal Blower Option No Yes, Single Blower Only Yes (with remote accessory) DUCT SPECIFICATIONS Vertical Single Internal Blower 8" Round 8" Round 8" Round 8" Round 8" Round 3-1/4" x 10" or 8" Round 3-1/4" x 10" or 8" Round 10" Round 10" Round 10" Round NA NA AC POWER (Single Blower) 120V, 60Hz at Max. 5A 120V, 60Hz at Max. 5A 120V, 60Hz at Max. 9A OPTIONAL ACCESSORIES 12" Duct Cover AK0720 AK0726 AK0722 Wireless Remote Control 14000005 14000005 Dual Internal Blower Kit NA PBD-1200A Recirculating Kit ZRC-7000B ZRC-7036B ZRC-7042B	×2	Halogen, 35W x2	Halogen, 35W x2	Halogen, 35W x2	Lighting
Wireless Remote Control Option Yes, RF Dual Internal Blower Option Recirculating Option*** Yes, Single Blower Only Yes, Single Blower Only Yes, Single Blower Only Yes (with remote accessory) Yes (with remote accessory) Per (with remote accessory)		Yes	Yes	Yes	Dual-Level Lighting
Dual Internal Blower Option Recirculating Option*** ADA CompliantNoYesYesADA CompliantYes, Single Blower Only Yes (with remote accessory)Yes (with remote accessory)Yes (with remote accessory)DUCT SPECIFICATIONSVertical Single Internal Blower Horizontal Single Internal Blower* Horizontal Dual Internal Blower Horizontal Dual Internal Blower8" Round 3-1/4" x 10" or 8" Round 10" Round NA8" Round 3-1/4" x 10" or 8" Round 10" Round NAAC POWER (Single Blower) AC POWER (Dual Blower)120V, 60Hz at Max. 5A 120V, 60Hz at Max. 9A120V, 60Hz at Max. 5A 120V, 60Hz at Max. 9A120V, 60Hz at Max. 9AOPTIONAL ACCESSORIES 12" Duct Cover Wireless Remote Control Dual Internal Blower Kit NAAK0720 14000005		Pro Baffle x3	Pro Baffle x3	Pro Baffle x2	Filters
Recirculating Option*** Yes, Single Blower Only Yes (with remote accessory) Puter (with remote accessory) Yes (with remote accessory) ### Supplementary ### NA ### 120V, 60Hz at Max. 5A ### 120		Yes, RF	Yes, RF	Yes, RF	Wireless Remote Control Option
ADA Compliant Yes (with remote accessory) **Round** 3-1/4" x 10" or 8" Round** 10" Round** NA NA NA NA NA NA NA **Round** 10" Round NA NA NA NA **POWER (Single Blower) 120V, 60Hz at Max. 5A 120V, 60Hz at Max. 5A 120V, 60Hz at Max. 9A 120V, 60Hz at Max. 5A 120V,		Yes	Yes	No	Dual Internal Blower Option
DUCT SPECIFICATIONS Vertical Single Internal Blower 8" Round 8" Round 3-1/4" x 10" or 8" Round 3-1/4" x 10" or 8" Round 3-1/4" x 10" or 8" Round 10" Round 10" Round 10" Round NA NA NA AC POWER (Single Blower) 120V, 60Hz at Max. 5A 120V, 60Hz at Max. 5A 120V, 60Hz at Max. 5A 120V, 60Hz at Max. 9A 120V, 60Hz at Max. 9A OPTIONAL ACCESSORIES 12" Duct Cover AK0720 AK0726 AK0722 Wireless Remote Control 14000005 14000005 14000005 Dual Internal Blower Kit NA PBD-1200A PBD-1200A Recirculating Kit ZRC-7000B ZRC-7036B ZRC-7042B	ver Only	Yes, Single Blower Or	Yes, Single Blower Only	Yes, Single Blower Only	Recirculating Option***
Vertical Single Internal Blower 8" Round 8" Round 8" Round Horizontal Single Internal Blower* 3-1/4" x 10" or 8" Round 3-1/4" x 10" or 8" Round 3-1/4" x 10" or 8" Round Vertical Dual Internal Blower NA 10" Round 10" Round Horizontal Dual Internal Blower NA NA NA AC POWER (Single Blower) 120V, 60Hz at Max. 5A 120V, 60Hz at Max. 5A 120V, 60Hz at Max. 9A AC POWER (Dual Blower) 120V, 60Hz at Max. 9A 120V, 60Hz at Max. 9A 120V, 60Hz at Max. 9A OPTIONAL ACCESSORIES 12" Duct Cover AK0720 AK0726 AK0722 Wireless Remote Control 14000005 14000005 14000005 Dual Internal Blower Kit NA PBD-1200A PBD-1200A Recirculating Kit ZRC-7000B ZRC-7036B ZRC-7042B	e accessory)	Yes (with remote acce	Yes (with remote accessory)	Yes (with remote accessory)	ADA Compliant
Horizontal Single Internal Blower* 3-1/4" x 10" or 8" Round 3-1/4" x 10" or 8" Round 3-1/4" x 10" or 8" Round Vertical Dual Internal Blower NA 10" Round 10" Round Horizontal Dual Internal Blower NA NA NA AC POWER (Single Blower) 120V, 60Hz at Max. 5A 120V, 60Hz at Max. 5A 120V, 60Hz at Max. 9A AC POWER (Dual Blower) 120V, 60Hz at Max. 9A 120V, 60Hz at Max. 9A 120V, 60Hz at Max. 9A OPTIONAL ACCESSORIES 12" Duct Cover AK0720 AK0726 AK0722 Wireless Remote Control 14000005 14000005 14000005 Dual Internal Blower Kit NA PBD-1200A PBD-1200A Recirculating Kit ZRC-7000B ZRC-7036B ZRC-7042B					DUCT SPECIFICATIONS
Vertical Dual Internal Blower NA 10" Round 10" Round Horizontal Dual Internal Blower NA NA NA AC POWER (Single Blower) 120V, 60Hz at Max. 5A 120V, 60Hz at Max. 5A 120V, 60Hz at Max. 5A AC POWER (Dual Blower) 120V, 60Hz at Max. 9A 120V, 60Hz at Max. 9A 120V, 60Hz at Max. 9A OPTIONAL ACCESSORIES 12" Duct Cover AK0720 AK0726 AK0722 Wireless Remote Control 14000005 14000005 14000005 Dual Internal Blower Kit NA PBD-1200A PBD-1200A Recirculating Kit ZRC-7000B ZRC-7036B ZRC-7042B		8" Round	8″ Round	8" Round	Vertical Single Internal Blower
Horizontal Dual Internal Blower NA NA NA NA	⁻ 8″ Round	3-1/4" x 10" or 8" Rc	3-1/4" x 10" or 8" Round	3-1/4" x 10" or 8" Round	Horizontal Single Internal Blower [†]
AC POWER (Single Blower) 120V, 60Hz at Max. 5A 120V, 60Hz at Max. 9A 120V, 60Hz at Max. 5A 120V, 60Hz at Max. 9A 120V, 60Hz at Max. 9A 120V, 60Hz at Max. 9A 120V, 60Hz at Max. 5A 120V, 60Hz at Max. 9A 120V, 60Hz at Max.		10" Round	10" Round	NA	Vertical Dual Internal Blower
AC POWER (Dual Blower) 120V, 60Hz at Max. 9A OPTIONAL ACCESSORIES 12" Duct Cover		NA	NA	NA	Horizontal Dual Internal Blower
OPTIONAL ACCESSORIES 12" Duct Cover AK0720 AK0726 AK0722 Wireless Remote Control 14000005 14000005 14000005 Dual Internal Blower Kit NA PBD-1200A PBD-1200A Recirculating Kit ZRC-7000B ZRC-7036B ZRC-7042B	Max. 5A	120V, 60Hz at Max. 5	120V, 60Hz at Max. 5A	120V, 60Hz at Max. 5A	AC POWER (Single Blower)
12" Duct Cover AK0720 AK0726 AK0722 Wireless Remote Control 14000005 14000005 14000005 Dual Internal Blower Kit NA PBD-1200A PBD-1200A Recirculating Kit ZRC-7000B ZRC-7036B ZRC-7042B	Max. 9A	120V, 60Hz at Max. 9	120V, 60Hz at Max. 9A	120V, 60Hz at Max. 9A	AC POWER (Dual Blower)
Wireless Remote Control 14000005 14000005 14000005 Dual Internal Blower Kit NA PBD-1200A PBD-1200A Recirculating Kit ZRC-7000B ZRC-7036B ZRC-7042B					OPTIONAL ACCESSORIES
Dual Internal Blower KitNAPBD-1200APBD-1200ARecirculating KitZRC-7000BZRC-7036BZRC-7042B					
Recirculating Kit ZRC-7000B ZRC-7036B ZRC-7042B		14000005	14000005	14000005	Wireless Remote Control
		PBD-1200A	PBD-1200A	NA	Dual Internal Blower Kit
			ZRC-7036B		=
Backsplash with Shelves AK0710 AK0716 AK0712		AK0712	AK0716	AK0710	Backsplash with Shelves
Bloom™ GU10 LED Z0B0040 Z0B0040 Z0B0040					
Make-Up Air Kit (Single Blower) MUA008A MUA008A MUA008A					
Make-Up Air Kit (Dual Blower) NA MUA010A MUA010A		MUA010A	MUA010A	NA	Make-Up Air Kit (Dual Blower)
MOUNTING HEIGHT RANGE ⁺⁺ 26" - 36" 26" - 36" 26" - 36"		26" - 36"	26" - 36"	26" - 36"	MOUNTING HEIGHT RANGE**
WARRANTY 3 years parts, 1 year labor 3 years parts, 1 year labor 3 years parts, 1 year labor	year labor	3 years parts, 1 year	3 years parts, 1 year labor	3 years parts, 1 year labor	WARRANTY



AIRFLOW CONTROL TECHNOLOGY™ (ACT™)

is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.



^{*}ACT[™] only available with single internal blower.

**When ACT[™] is enabled the maximum speed levels will change. ACT 390 CFM = 3 speeds and ACT 290 CFM = 2 speeds.

***Recirculating kit includes a return-air box which adds an additional 4" to the hood height. Recirculating kit is only compatible with single blower.

**If horizontally ducting via 3-1/4" x 10", the maximum airflow of 650 CFM will be reduced to 550 CFM.

**Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.