


### **SPECIFICATION SHEET**

# ECLISSE WC34E SERIES RANGE HOOD



The common made uncommon. ECLISSE can be a powerful statement from one angle but nearly disappear from another. This is a unique "brick" design that makes it most attractive and exclusive.

#### **FEATURES**

- Italian design
- Wall mount
- Finishes: 430 Stainless Steel, #4 Brushed
- Width: 90 cm (35-7/16-in.)
- Telescopic flue accommodates 8' to 9' ceilings
- 8" round duct connector/backdraft damper
- 1-level LED lighting (2 LED modules, 6 Watts each included)
- 4-speed electronic blower control with LED speed indicator
- Use with exterior-mounted or inline remote blowers for different levels of exhaust capacity (see specifications)
- Heat Sentry<sup>™</sup> automatically turns blower to high speed when excess cooking heat is detected
- Delay timer control automatically shuts off range hood after 10 minutes
- Special control indicates when it's time to clean the filter
- Dishwasher-safe filter features a quick-release latch
- For indoor use only


#### **OPTIONS**

- 8-in. to 10-in. transition (Model 414)
- Flue extension for 10-ft. to 11-ft. ceilings (Model AEWC345IQSB), stainless steel (44-5/8" long)



#### **SPECIFICATIONS**

WITH OPTIONAL BLOWER MODELS		BLOWER CFM	VOLTS	AMPS	DUCT		
EB6		600 max.		0.40 (lights only) + 6.0 max. (blower only)			
EB9	wall or roof mount	900 max.	120				
EB12	exterior blowers	1200 max.			8-in, round at		
EB15		1500 max.			the hood.		
ILB3		280 max.			See blower specs for duct		
ILB6	inline	600 max.			requirements.		
ILB9	blowers	800 max.					
ILB11		1100 max.					





BEST Hartford, Wisconsin www.BestRangeHoods.com 800-558-1711
BEST Drummondville, QC, Canada www.BestRangeHoods.com 866-737-7770

REFERENCE	QTY.	REMARKS	Project	
			Location	
			Architect	
			Engineer	
			Contractor	
			Submitted by	Date


31M 99045171A

## WC34E SERIES WIRING

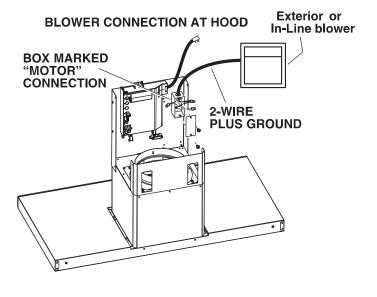

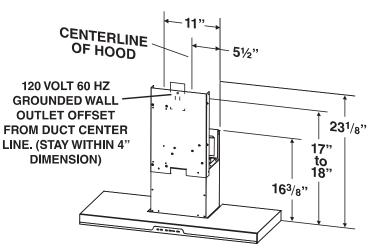

# WC34E SERIES MOUNTING

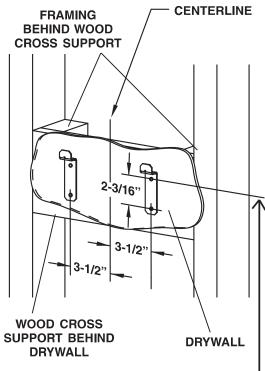

CEILING	DUCT METHOD	HOOD 24"	DISTANC	E ABOVE 3   26"	36" HIGH C 27"	OOK TOP 28"	(see note   29"	below) ∣ 30"
HEIGHT		MOUNTING BRACKET CENTER HOLE LOCATION ABOVE 36" HIGH COOKTOP						
8 FEET	DUCTED	38"	39"	40"	41"	42"	43"	44"
9 FEET	DUCTED	38" *	39" *	40" *	41"	42"	43"	44"
10 FEET (see note b.)	DUCTED	38" *	39" *	40"	41"	42"	43"	44"
11 FEET (see notes a. & b.)	DUCTED					42"	43"	44"

- a. Minimum hood distance above cook top must not be less than 24. A maximum of 30" above cook top is highly recommended for best capture of cooking impurities. Distances over 30" are at the installer and user's discretion; and if ceiling height and flue length permit.
- b. Requires optional 10' flue extension, ducted model AEWC345IQSB.

