

EVOQUE 48"

48" INDUCTION RANGE - ALL GLASS



CODE ID



F4EIR486BR1-**



Easy Clean Ceramic Glass



Bridge Zone



Power Boost Burner



Pan Detection system



Residual Heat Sensor



Dual True Convection (main oven)



Single True Convection (accessory oven)



Soft Closing Door



Self Clean Oven



1 Telescopic Rack



Cool Touch Door



Digital Controls



Meat Probe



Fast Pre-Heat



F4EIR486BR1-WH
GLOSSY WHITE RAL 9016



F4EIR486BR1-IV
GLOSSY IVORY RAL 1013



F4EIR486BR1-BK
GLOSSY BLACK RAL 9004



F4EIR486BR1-SS
STAINLESS STEEL



F4EIR486BR1-MW
MATTE WHITE RAL 9016



F4EIR486BR1-MI
MATTE IVORY RAL 1013



F4EIR486BR1-MB
MATTE BLACK RAL 9004



F4EIR486BR1-RAL
RAL CODE

SUMMARY DESCRIPTION

The Evoque 48" induction range derives its name from a purposeful intention: to evoke memories of an era when ranges were designed to capture the essence and legacy of Italian artistry. This collection was conceived to provide customers with a unique appliance that beautifully unites the spirit of the Italian Renaissance with the performance North American consumers demand from a professional-style range. Every Evoque range is meticulously handcrafted in the Veneto Region of Italy with only the highest quality materials are selected, ensuring that each range reflects both the timeless traditions of Italian design and the rigorous standards expected in today's kitchens. Finished with a refined Brushed Brass metal finish, the Evoque range is offered in a selection of standard colors or can be custom ordered in an RAL color to suit your personal style.

SPECIFICATIONS

COOKING SURFACE

Seven powerful premium European inductors
4 Single Induction cooking zones
1 Max Power with Ø 11" cooking zone
2 Bridge Zone Elements (griddle function)
Elegant Ceramic glass surface
Booster function for each cooking zone
Residual heat and Power-on Indicators
Pot Detection System
Child Lock Function
Automatic Heat-up

OVEN

Dual True Convection in main oven and
True Convection in accessory oven
Self-cleaning oven with Multifunction baking
Black Porcelain enamel interior
Cool to the touch soft closing doors
Extra-large baking cavity and viewing area
3 Halogen lights on main oven
2 Halogen light on accessory oven
2 Chrome racks per oven
1 Telescopic rack per oven
1 Meat probe
Total capacity 123 lt and 63,4 lt
Total capacity 4,34 cu. ft. and 2,24 cu. ft.

OVEN FUNCTIONS


Bake
Broil
Roast
True Convection
Warm / Proof / Dehydrate
Meat Probe
Self-Clean
Sabbath Mode
Convection Roast

OPTIONAL ACCESSORIES

F6BG48STD	Standard trim
F6BG48HBT	High back trim
F6BG48BCI	Island trim
FMTRP30	Telescopic rack
FMTRP18	Telescopic rack

EVOQUE 48"

48" INDUCTION RANGE - ALL GLASS

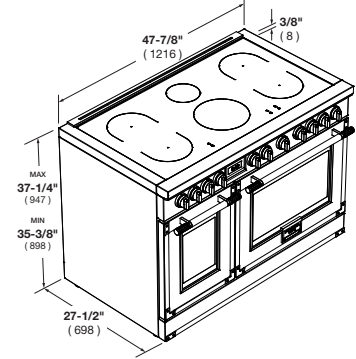

CODE ID			F4EIR486BR1-**				
Series			48” Evoque - Induction				
COOKTOP							
Type Cooking Surface			Induction Ceramic Glass				
Knobs			•				
Induction Special Features			BASIC 4				
			Pot Detection System		Child lock function		
			Cooling fan system		Failure Codes indication		
INDUCTION CONTROL FEATURES							
			Knob for power setting (illuminated)		Power levels 1 to 9		
			Digital display for power level indication		Booster/Fast boil function for each zone		
			Heat up time automatic		Minute minder		
			Residual heat indication				
COOKING ZONES			6				
Front Left	Power L9	Booster	Inductor Octa	(210x190mm)		2100W	3000W
Rear Left	Power L9	Booster	Inductor Octa	(210x190mm)		2100W	3000W
Front Right	Power L9	Booster	Inductor Octa	(210x190mm)		2100W	3000W
Rear Right	Power L9	Booster	Inductor Octa	(210x190mm)		2100W	3000W
Front Middle	Power L9	Booster	Inductor 10"	(250mm)		2300W	3000W
Rear Middle	Power L9	Booster	Inductor 6	(145mm)		1400W	1850W
OVEN							
Type			ELECTRONIC NO PIRO		ELECTRONIC PIRO		
Oven Type			Multifunction 1 Fan (True Euro Conv.)		Multifunction 2 Fans (True Euro Conv.)		
Temperature Regulation			Mechanical thermostat		Electronic		
Functions							
Pyrolitic Self-Clean with automatic door latch					•		
True European Convection Bake (Multi level)			•		•		
Convection Broil			•		•		
Convection Roast			•		•		
Bake / Broil			•		•		
Pizza (Lower Convection)			•				
Thaw (Defrost)					•		
Oven Lights			•		•		
Control Panel							
Control type			Thermostat		OKIDA OC3100 - Electronic		
Clock, Temperature, Function Display			NO DISPLAY		White LED		
Commands			2 Knobs		2 Knobs		
Electric Oven Features							
Preheat bar (25%, 50%, 75%, 100%)					•		
Sabbath mode					•		
Hours clock format AM / PM					•		
°F-°C degree unit					•		
Oven Door(s)							
Oven Glass Window			Deep Embossed Window		Deep Embossed Window		
Door Cooling System			4 Pane Heat Resistant Glass		4 Pane Heat Resistant Glass		
Soft closing system			•		•		
Door Hinges			Heavy Duty Steady Tilt		Heavy Duty Steady Tilt		
Handle style			Alluminum Tube d30mm, Metal terminals		AlluminumTube d30mm, Metal terminals		
Oven Cavity							
Net Capacity (cbft)			2,4		4,4		
Cavity Enameling Colour			Black		Black		
Rack Positions			6		6		
Oven Lights			2 x20W Halogen		3x20W Halogen		
Heating Element							
Broil Upper Heating Element			2100 W (240V)		3100 W (240V)		
Upper Auxiliary Element Wattage			700 W (240V)		1032W (240V)		
Concealed Bake Lower Heating Element			1750 W (240V)		1400 + 600 W (240V)		
Convection Element Wattage			1x2500 W (240V)		2x1300 W (240V)		
Oven Accessories							
Chromed racks			•		•		
Enameled Grill set (basin + anti splash)					•		
Telescopic chromed rack			•		•		
Meat probe			not present		1		
DIMENSIONS WEIGHT (In or Lbs)							
Overall dim - Width Height Depth (Included Handle)			47 3/4” (1216 mm) 35 3/8” (898) - 37 1/4” (947) 29 3/4” (756 mm)				
Gross weight Net weight			199 kg - 439 lb 174 kg - 384 lb				
POWER / RATINGS (208/240 V, 60 HZ)							
KW/Amps rating at 120-240V, 60Hz			5,90 (to be confirm with pre-test)				
KW/Amps rating at 120-208V, 60Hz			5,73 (to be confirm with pre-test)				
Power Cable Cable length			Nema 14-50P 59 1/16” (1500mm)				
INSTRUCTIONS FOR USE							
Use & Care Manual - Installation Manual			EN, SP, FR				