




Nesso is a sleek, slender range hood with a height of just 5 inches and soft curves, making it the perfect choice for modern kitchens where space is limited.

This hood comes in stainless steel or black and equipped with a 3-speed, 280 CFM internal blower that provides ample ventilation power for most kitchens. Nesso is designed for standard ducted installation and can also be installed as a recirculating system using the Recirculating Kit, which is available as an accessory.

MOUNTING HEIGHT RANGE



 $\geq 24"$ $\geq 30"$

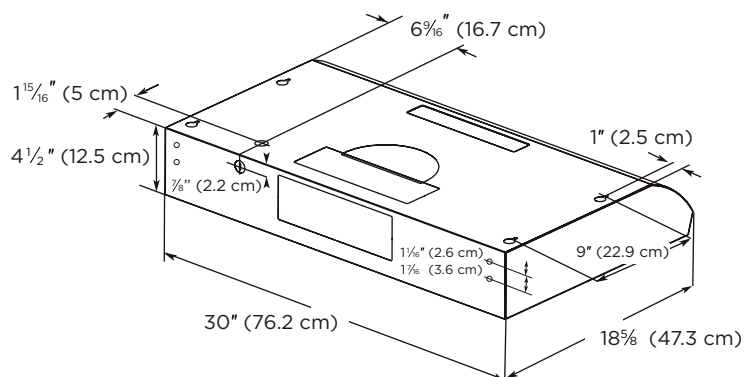

SPECIFICATIONS

Width:	30" Unit	30" Unit
Model:	PUCNS230SS	PUCNS230BL
Dimensions:	30"W x 18 5/8"D x 4 1/2"H	30"W x 18 5/8"D x 4 1/2"H
Blower Type (internal):**	280 CFM(3-speed)	280 CFM(3-speed)
Noise (sones):**	1.3 - 4.9 Sones	1.3 - 4.9Sones
Finish:	Stainless Steel	Black
Controls:	Backlit Electronic Push Buttons	Stainless Steel Push Buttons
Illumination: (replaceable lamps 1 intensity)	2 LED, 2.1 Watts 3000 KELVIN 235 LUMEN/Lamp	2 LED, 2.1 Watts 3000 KELVIN 235 LUMEN/Lamp
Grease Filter:	(1)Dishwasher-Safe, Anodized Aluminum Mesh Filter	(1)Dishwasher-Safe, Anodized Aluminum Mesh Filter
Duct Transition:	3 1/4" x 10" Rectangular with Backdraft Damper (top or rear) or 7" Round (top) sold separately	3 1/4" x 10" Rectangular with Backdraft Damper (top or rear) or 7" Round (top) sold separately
Installation Type:	Ducted or Recirculating with Kit	Ducted or Recirculating with Kit
Mounting Height Range:	Electric ≥ 24", Gas ≥ 30"	Electric ≥ 24", Gas ≥ 30"
Electrical:	120V - 60 Hz, 115 Watts	120V - 60 Hz, 115 Watts
ACCESSORIES:		
Recirculating Kit:	ACC0140997	ACC0140997
Backdraft Damper 7" Round:	ACC02723	ACC02723
Duct Transition 7" Round:	ACC02722	ACC02723
WARRANTY:	Two (2) years parts & in-home labor	

PLUS FEATURES



Aluminum mesh filters are a cut above the competition, featuring a triple-layered design of anodized aluminum woven into a highly dense mesh, capturing more grease and resisting staining.



LED LIGHTING - High Quality LED with 20,000 hours of lifespan allows a significant energy saving.

*The product images shown are for illustration purposes only and may not be an exact representation of the product.

**CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

