



VG295250CA

1 x WOK attachment ring

WP400001:  
Wok pan

Gas Cooktop 200 series  
36", Natural gas 15 mbar  
VG295250CA

- Mechanical power level regulation for 9 power levels, with exact setting and reproduction of flame size
- Control panel for comfortable and secure operation
- Control panel for comfortable and secure operation

Mechanical power level regulation for 9 power levels, with exact setting and reproduction of flame size  
Multi-ring burner of solid, heat-resistant brass as used in professional kitchen  
Solid smooth-surface cast iron pan supports  
Up to 17.5kW on 5 burners

#### Cooking zones

1 multi-ring wok burner (300 W – 5500 W), suitable for pots up to max. ø 32 cm.  
2 two-ring high output burners (170 W – 4000 W), suitable for pots up to max. ø 28 cm.  
2 two-ring standard burners (170 W – 2000 W), suitable for pots up to max. ø 28 cm.

#### Operation

Control knobs with illuminated ring.  
Integrated control panel.  
One-handed operation.  
Electric ignition.

#### Features

Three-part cast iron pan support with flat, continuous pot surface.  
Brass burner rings.

#### Safety


Thermoelectric safety pilot.  
Residual heat indicator.  
Operation indicator.

#### Planning notes

No intermediate shelf required.  
Appliance can be snapped into the worktop from above.  
The rear panel must consist of a non-flammable material. Wall trims must be resistant to heat.  
Installation in a 90 cm wide lower cabinet is required.  
Above countertop minimum clearance of at least 11 13/16" from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation must be installed.  
Minimum distance between gas cooktop(s) with more than 37,533 BTU(11kW) and ventilation hood must be 30" (76cm).  
Appliance weight: approx. 29 kg.

#### Rating

Total connected load gas 17.5 KW.  
Total Amps: 1 A. 120 V/60 Hz  
Connecting cable 1.5 m with plug.

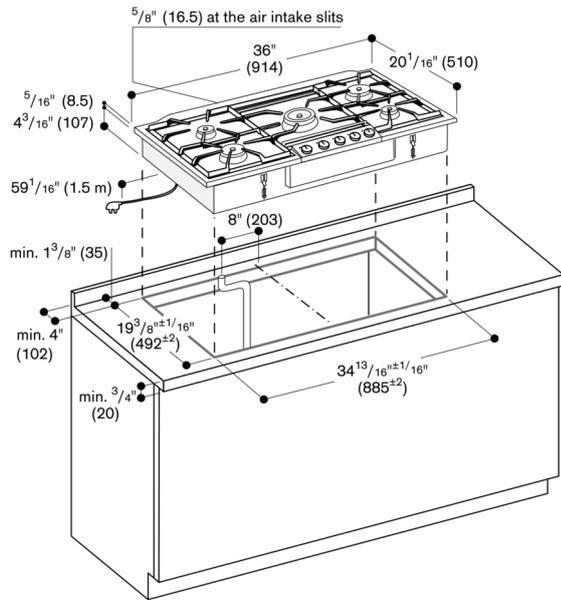

Minimum distance from the appliance cut-out to the side wall 11 3/16" (300 mm).

Gas connection

